




Premium Surface Qualities

Knauf Filler to Finish (F2F)

Knauf Readygips

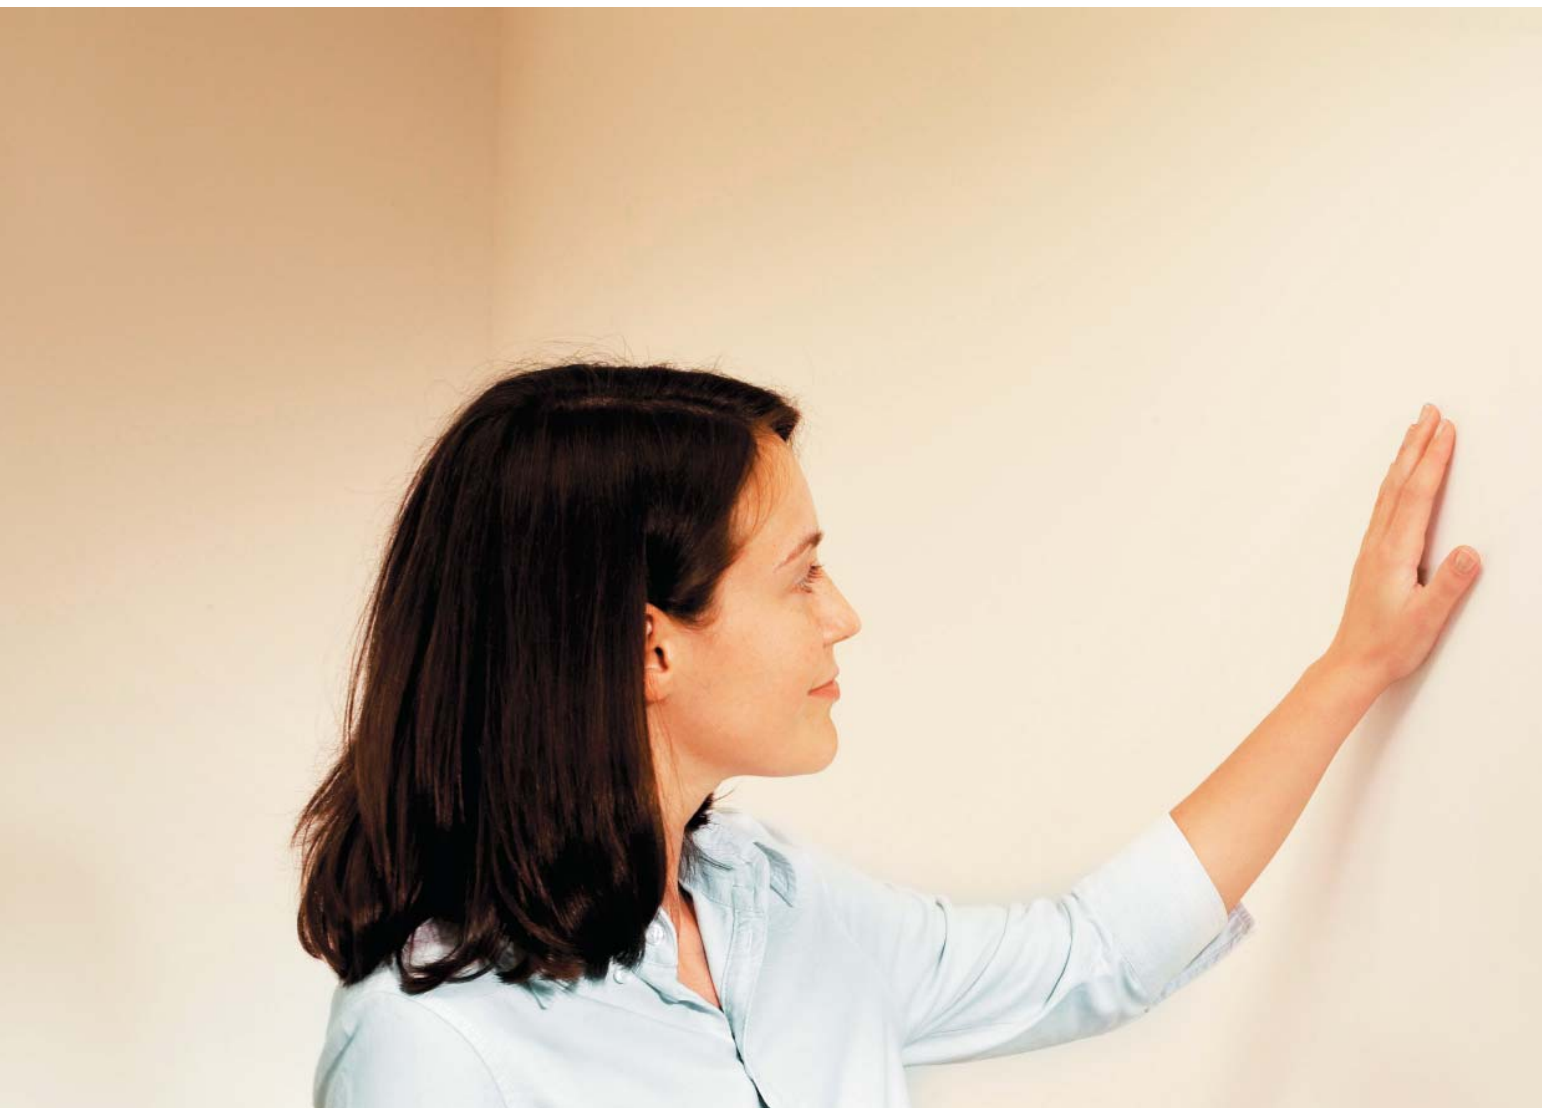

Accept the Challenge of Creating Premium Surface Qualities

Joint filling and skim coating determines the quality of the entire surface of walls and ceilings in drywall and plaster constructions. No matter if smooth or structured, white, decent or intensive colored — premium surfaces leave nothing to be desired by clients in order to design the interior individually.

Knauf Filler to Finish (F2F) and Knauf Readygips are high-performance, ready mixed compounds for manual and mechanical application.

Typical fields of application of F2F and Readygips is the use as skim coating material on wall- and ceiling plasters, concrete areas and aerated concrete, as joint finish or joint filler (in combination with Knauf Joint Tape Kurt).

Skim coated areas with F2F or Readygips are perfect substrates for following spatula techniques like Knauf Stucco Design and Knauf Marble Design, Knauf Easyputz Plaster, wallpapers and paints.



smoothing




sanding



Profitability of mechanical application versus manual application

Example: Skim coating a concrete area using PFT SAMBA XL, an airless sprayer which can be used for numerous pasty materials. The material is sucked directly from a bucket or container. Via a high pressure hose and a special pistol Knauf Filler to Finish or Knauf Readygips is evenly applied on the walls or ceilings.

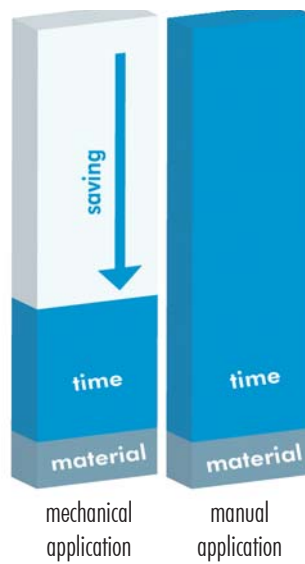

Knauf Filler to Finish / Knauf Readygips

- Skim coat on wall- and ceiling plasters, concrete areas and aerated concrete.
- As joint filler in case of plasterboards with AK (flattened) border and with SK (sharp- edged) border in combination with Knauf Joint Tape Kurt.
- As finish of joints of plasterboards which are already filled widely even with Knauf Uniflott/ Uniflott impregnated or Knauf Fugenfüller / Joint Filler, in order to achieve surface quality level Q3*.
- As skim coat on plasterboard constructions in order to achieve the premium surface quality level Q4*.

*„Joint Filling of Plasterboards - Surface Qualities“, Technical Data Sheet No. 2, Industriegruppe Gipsplatten im Bundesverband der Gips- und Gipsplattenindustrie e.V. Darmstadt, Germany, 2003.

Color:

- Knauf Filler to Finish (F2F): pure white
- Knauf Readygips: light grey





The content of this technical data sheet corresponds to our knowledge at time of printing. Technical data sheets are actualized regularly. The relevant version is available on our web page or by calling our Technical Service Department. Knauf Bauprodukte, does not authorize anyone, including Knauf Bauprodukte Representatives, to make any statements which supersede, modify or supplement the information provided on its printed literature or package labels without written confirmation from Knauf Bauprodukte Technical Service Department. Knauf Bauprodukte makes no warranty of merchantability or suitability of its products for any particular purpose. All product demonstrations are placed for illustrative purposes only and do not constitute a warranty of any kind. Knauf Bauprodukte sells its products upon the condition that customers shall conduct their own tests to determine the suitability of the products for the customers' intended purposes. Under no circumstances will Knauf Bauprodukte be liable for economic, special, incidental, or consequential damages or losses of any kind whatsoever arising out of or occasioned by the selection, use, installation, or replacement of these products.



Knauf Bauprodukte GmbH & Co. KG

Technical Support:

▶ **Phone: +49 (0) 9323 31-247**

▶ **Fax: +49 (0) 9323 31-1024**

▶ www.knauf-bauprodukte.de www.buildingchemicals.de

BPBC003/eng/intermediell/11.08

Drywall Systems & Skim Coatings

Knauf Bauprodukte GmbH & Co. KG Export-Department

Am Bahnhof 7, 97346 Iphofen, Germany

Phone: +49 (0) 9323 31-0, Fax: +49 (0) 9323 31-1024

www.knauf-bauprodukte.de www.knauf.com