

2013 + 2014 CATALOG
COMMERCIAL





performance + practicality

Efficiency and experience. Durability and affordability. Style and substance.

In the commercial world, you need products that meet many needs at once. And that's exactly what Delta® commercial products are designed to do. So that whether you serve the healthcare, hospitality, multi-family market, or traditional commercial settings, you'll find hardworking innovations that are an easy choice for your project.





SMART SOLUTIONS 6

LAVATORY FAUCETS

Electronic Lavatory Faucets with Proximity® Sensing Technology 8

Electronic Lavatory Faucets with H₂Optics® Sensing Technology or Standard Infrared Sensing 10

Single-Handle 12

Two-Handle 14

Metering 16



FLUSH VALVES

Electronic 18

Manual 20

HEALTHCARE

Surgeon Scrub Up 24

 General Surgeon Scrub Up 25

Laboratory 26

Bedpan Cleansers 27



UNIVERSAL DESIGN

Single-Handle General Sink Faucets 30

Two-Handle General Sink Faucets 32

Wall Mount General Sink Faucets 34

Bath Accessories 36



MULTICHOICE® UNIVERSAL 38

TUB AND SHOWER 40

SHOWERHEADS AND DRAINAGE 42

WEB 43



Delta® Commercial Technical Service
800.387.8277



Currently, over 80% of Delta's bath suites feature showerheads and handshowers that meet WaterSense® requirements, using 20-40% less water than the industry standard.* Our WaterSense-labeled lavatories use 32% less* water—and all perform as well or better than their less-efficient counterparts.

Delta products also offer sustainability in the form of long-lasting durability—thanks to smart solutions like DIAMOND™ Seal Technology—as well as contributing to LEED® certification.



How to use this catalog.

Look for these icons throughout the catalog to easily identify key features of our commercial products.


 = Proximity Sensing Technology

 = H₂Optics Sensing Technology

 = DIAMOND Seal Technology

 = H₂Okinetic® Technology


 = WaterSense® Labeled Product

 = Water-Efficient Product

Lavatory Faucets: flow rate of 1.5 gpm versus Industry Standard ASME A112.18.1/CSA B125.1 of 2.2 gpm and meet CALGreen standards.

Flush Valves: water closet flush valves of 1.27 gpf and urinal flush valves of .5 gpf versus Industry Standard ASME 112.2.

Showerheads and Handshowers: flow rate of 1.5 or 2.0 gpm versus Industry Standard ASME A112.18.1/CSA B125.1 of 2.5 gpm and meet CALGreen standards.

 = Compliant with State and Federal drinking water legislation.

*Based on flow rate for showerheads and handshowers of 1.5 gpm or 2.0 gpm versus Industry Standard ASME A112.18.1/CSA B125.1 of 2.5 gpm; and flow rate for lavatory faucets of 1.5 gpm versus Industry Standard ASME A112.18.1/CSA B125.1 of 2.2 gpm.



Inside the innovation.

Proximity® Sensing Technology.

For the most responsive electronic faucets in the industry, look no further than Delta® faucets featuring Proximity Sensing Technology—the next generation in hands-free functionality. Proximity Sensing Technology enables one to turn on the water simply by placing a hand near the faucet spout. The entire faucet body acts as a sensor, responding when activated. And the lack of an exposed sensor reduces the risk of sensor damage from vandalism or harsh cleaning products.

H₂Optics® Sensing Technology.

Delta electronic faucets and flush valves with H₂Optics Sensing Technology operate consistently, time after time, regardless of interference factors such as dark clothing or lighting conditions. All electronic faucets and flush valves featuring H₂Optics Sensing Technology are water efficient*—contributing to LEED® certification.

Battery backup for hardwire-operated electronics.

Battery backup allows hardwire units to continue operating during power outages, by switching to power from a 9-Volt battery until power is restored. Available on most Delta hardwire-operated electronic models.



*Water-Efficient Product—Lavatory faucets: flow rate of 1.5 gpm versus Industry Standard ASME A112.18.1/CSA B125.1 of 2.2 gpm.
Flush valves: water closet flush valves of 1.27 gpf and urinal flush valves of .5 gpf versus Industry Standard ASME 112.2.



H₂Okinetic® Technology.

H₂Okinetic Showers utilize the natural energy of water unlike any shower has before. Large water droplets move in a unique wave pattern, creating a warmer shower experience with 3X the coverage of a standard shower.** And H₂Okinetic showerheads are designed to feel like more water, without using more than standard showerheads—which helps you save utility costs and contributes points toward LEED® certification.



MultiChoice® Universal.

One rough. Unlimited possibilities. MultiChoice Universal provides the flexibility to upgrade the style or functionality of showers without altering the plumbing behind the wall. A more refined temperature limit stop allows temperatures to be set more precisely. Plus, multiple connection options and a high-flow rough for shower-only configurations only add to the valve's flexibility.



DIAMOND™ Seal Technology.

Long faucet life is crucial in keeping maintenance hassles and building operating costs at a minimum. DIAMOND Seal Technology utilizes a diamond-coated ceramic cartridge, designed and tested to feel like new for life. And once inside the faucet, water is not in contact with metal contaminants.

**Coverage measured in accordance with EPA WaterSense® Specification for Showerheads, March 4, 2010.



ELECTRONIC LAVATORY FAUCETS WITH PROXIMITY® SENSING TECHNOLOGY

A New Take on Hands-Free
Requires no optics or infrared sensors; the whole faucet body acts as a sensor.



600T040





Single-Hole Single-Inlet Arzo® with Proximity Sensing Technology
600T040 – 1.5 gpm

- 24 VAC to 6 VDC
- Hardwire operation
- Battery models and 0.5 gpm models available
- Cast brass body
- Surface-mounted control box
- Field adjustment of electrical sensitivity
- Optional 4" decorative coverplate
- Transformer required—order separately



Single-Hole Single-Inlet High-Rise Faucet with Proximity Sensing Technology
590TP0120

- 24 VAC to 6 VDC
- Hardwire operation
- Cast brass body
- Anti-rotational pin supplied
- 1.5 gpm vandal-resistant laminar outlet
- Surface-mounted control box
- Models also available with 8" and 4" forged coverplates, battery operation and additional outlets
- Transformer required—order separately



3-Hole Single-Inlet 4" Centerset Faucet with Proximity Sensing Technology
591TP0250

- 24 VAC to 6 VDC
- Hardwire operation
- Cast brass body
- 0.5 gpm spray outlet
- Surface-mounted control box
- Models also available with battery operation and additional outlets
- Transformer required—order separately



Single-Hole Single-Inlet High-Rise Faucet with Proximity Sensing Technology
590-PLGHDFHW

- Hardwire operation
- Metal construction
- Field adjustment of electrical field sensitivity
- Anti-rotational pin
- 0.5 gpm spray outlet
- Surface-mounted control box
- Models also available with 4" and 8" coverplates and battery operation
- Transformer required—order separately



Hardwire models are also available with the battery backup option referenced on page 6.

For additional information on the models shown here, as well as other available models, please go to www.specselect.com.

ELECTRONIC LAVATORY FAUCETS WITH H₂OPTICS[®] SENSING TECHNOLOGY OR STANDARD INFRARED SENSING



Durable Performance

Hands-free functionality durable enough to withstand a wide variety of commercial applications.



590T1120



3-Hole Single-Inlet 4\"/>

- Featuring H₂Optics Sensing Technology
- Cast brass body
- Battery operation
- 1.5 gpm vandal-resistant laminar outlet
- Models also available with hardwire operation, additional outlets and mixing valves



Single-Hole Single-Inlet High-Rise Faucet 590T1120

- Featuring H₂Optics Sensing Technology
- Cast brass body
- Battery operation
- Anti-rotational pin
- 1.5 gpm vandal-resistant laminar outlet
- Adjustable sensing range and maximum run time



Single-Hole Single-Inlet Faucet 590LF-LGHGMHDF

- Featuring H₂Optics Sensing Technology
- Battery operation
- Metal construction
- Anti-rotational pin
- 0.5 gpm vandal-resistant spray outlet
- No field adjustments





3-Hole Single-Inlet 4\"/>

- Featuring H₂Optics Sensing Technology
- Battery operation
- Metal construction
- 0.5 gpm vandal-resistant spray outlet



Single-Hole Electronic Soap Dispenser
 DESD-550 – All-cast body
 DESD-250 – Non-metal version

- Solid machined shank with low profile spout
- Standard 800 ml soap bottle
- Standard infrared sensing
- Fits on decks up to 2" thick
- LED indicators: Yellow = low battery, Red = low soap
- Battery operation
- Hardwire kit available for field conversion



Single-Hole Faucet
 DEMD-301LF

- Battery operation
- Forged brass body
- Pre-mixed water
- Adjustable maximum run time
- Adjustable sensor range
- No anti-rotational pin
- Standard infrared sensing
- Optional 4" forged coverplate available
- Hardwire kit available for field conversion
- Remote control available (060967A)
- 0.5 gpm outlet



Single-Hole Dual-Inlet Faucet with Side Mixer
 DEMD-311LF

- Battery operation
- Non-removable side mixer to adjust water temperature
- Standard infrared sensing
- Adjustable maximum run time
- Adjustable sensor range
- No anti-rotational pin
- Optional 4" forged coverplate available
- Hardwire kit available for field conversion
- Remote control available (060967A)
- 0.5 gpm outlet



Concealed Single-Inlet Wall Mount Faucet
 DEMD-402LF – 8" spout
 DEMD-404LF – 6" spout

- Adjustable maximum run time
- Hardwire operation only
- Adjustable sensor range
- Standard infrared sensing
- Remote control available (060967A)
- 0.5 gpm outlet



Single-Hole Faucet
 DEMD-101LF

- Battery operation
- Above-deck solenoid and battery
- Vandal-resistant wrench flat spray outlet
- Standard infrared sensing
- Model with non-removable side mixer: DEMD-111LF



Single-Hole Dual-Inlet Faucet with Side Mixer
 DEMD-211LF

- Battery operation
- Vandal-resistant wrench flat spray outlet
- Non-removable side mixer to adjust water temperature
- Standard infrared sensing



Some hardwire models are also available with the battery backup option referenced on page 6.

For additional information on the models shown here, as well as other available models, please go to www.specselect.com.



SINGLE-HANDLE LAVATORY FAUCETS

Ceramic Disc Technology

Smooth operation makes this washerless faucet low-maintenance. The volume and temperature control is integrated so the faucet can be turned on in the same position as it was turned off for consistent temperature setting.

Longer Reaching Spout

Provides a 5-3/4" reach compared to the industry standard of 4". This reduces the chance of the user's hands touching the back of the sink and the amount of water pooling on the counters.

Water-Efficient Outlet

Available in four optional reduced-flow outlets, ranging from 0.5 gpm to 1.5 gpm.

Solid Cast Brass Body

Construction of this 4-pound faucet offers little opportunity for bacteria to collect and makes cleaning easy.





**4" Centerset Faucet
22C101**

- Cast brass body
- Vandal-resistant lever handle and 1.5 gpm outlet
- Ceramic cartridge with rotational limit stop to limit turning of the handle into hot zone



**4" Centerset Faucet
501LF-HGMHDF**

- Vandal-resistant lever handle and 0.5 gpm outlet
- Adjustable handle limit stop
- Diamond-embedded ceramic disc cartridge
- .35 gpm available: 501LF-TGMHDF



**4" Centerset Faucet
515LF-HDF**

- Includes metal pop-up lever
- Vandal-resistant 6" elbow handle and 1.5 gpm outlet
- Adjustable handle limit stop
- Diamond-embedded ceramic disc cartridge



**Single-Hole Faucet
22C631**

- Cast brass body
- Vandal-resistant lever handle and 1.5 gpm outlet
- Ceramic cartridge with rotational limit stop to limit turning of the handle into hot zone



**4" Centerset Faucet
22C131
22C331 – With metal pop-up**

- Cast brass body
- Vandal-resistant lever handle and 1.5 gpm outlet
- Ceramic cartridge with rotational limit stop to limit turning of the handle into hot zone



**Single-Hole Faucet
570LF-WFHDF**

- 4" swing spout
- Vandal-resistant lever handle and 1.5 gpm outlet
- Stainless steel ball with high temperature limit stop
- Available lead-free Q3 2013



**Widespread Single Control Faucet
24T2643**

- Vandal-resistant 6" elbow lever handle
- 4" to 16" adjustable centers
- 1.5 gpm outlet
- Available lead-free Q3 2013



For additional information on the models shown here, as well as other available models, please go to www.specselect.com.



TWO-HANDLE LAVATORY FAUCETS

Seamless Brass Spout

Compared to traditional tubular spouts on the market, this spout boasts a .09" wall thickness which provides superior force and vandal resistance.

Smooth-End Spout

This maintenance-free laminar flow outlet has the flow control located in the base of the spout, and the chrome-plated smooth end eliminates crevices for bacteria to form.

Limited Swing Gooseneck

Available in three variations and multiple sizes, this option limits movement of the spout to a maximum 120° rotation.

4" Blade Handles with Sanitary Hood

These vandal-resistant handles are designed to help prevent the growth of bacteria. The sanitary hood feature provides significantly less areas for bacteria to collect.





6"-12" Widespread Faucet
23C674-LS

- Vandal-resistant 4" blade handles with sanitary hood
- Laminar flow control smooth-end spout (1.0 gpm)
- CER-TECK® ceramic disk cartridge



6"-16" Widespread Faucet
3579LF-WFLGHDF

- Vandal-resistant wrist blade handles
- 1.5 gpm outlet
- Rigid gooseneck spout



6"-12" Widespread Faucet
23C642

- Vandal-resistant 4" hooded blade handles
- CER-TECK ceramic disk cartridge
- 1.5 gpm outlet
- Rigid/swivel gooseneck spout



4" Centerset Faucet
21C142

- Cast brass body
- Vandal-resistant 4" hooded blade handles
- CER-TECK ceramic disk cartridge
- 1.5 gpm outlet



6"-12" Widespread Faucet
23C333

- Vandal-resistant 3" hooded lever handles and 1.5 gpm outlet
- CER-TECK ceramic disk cartridge



4" Centerset Faucet
2529LF-LGHGMHDF

- Vandal-resistant wrist blade handles
- 0.5 gpm outlet



4" Centerset Faucet
21C143

- Cast brass body
- Vandal-resistant 3" hooded lever handles
- CER-TECK ceramic disk cartridge
- 1.5 gpm outlet



For additional information on the models shown here, as well as other available models, please go to www.specselect.com.



METERING LAVATORY FAUCETS

Cast Brass Body

Construction of this faucet offers little opportunity for bacteria to collect and makes cleaning easy.

Water-Efficient Outlet

Comes standard with a 0.5 gpm flow rate. Each handle is set not to exceed a flow of 0.25 gallons per activation.

Adjustable

Easily adjust the run time to match your water pressure.

ADA Tip Action Lever Handles

Offer ease of use and meet ADA standards—a feature not typically offered in metering faucets.





4" Centerset Faucet
86T1153

- Cast brass body
- Vandal-resistant tip action lever handles and outlet
- Adjustable close time



Single-Hole Faucet
87T104

- Cast brass body
- Vandal-resistant push-style handle and outlet
- Adjustable close time



Single-Hole Faucet
87T105

- Cast brass body
- Vandal-resistant tip action lever handle and outlet
- Adjustable close time



Single-Hole Faucet
701LF-HDF

- Vandal-resistant push-style handle and outlet
- Adjustable close time
- Available lead-free Q3 2013



4" Centerset Faucet
2507LF-HDF

- Vandal-resistant push-style handles and outlet
- Adjustable close time
- Available lead-free Q3 2013



For additional information on the models shown here, as well as other available models, please go to www.specselect.com.



ELECTRONIC FLUSH VALVES + OPTIONS

Easy to Install and Adjust

Right out of the box, the batteries are already installed and setup is a breeze with adjustable settings.

Vandal Resistant

All metal heavy-duty construction. Chloramine-resistant diaphragm.

Cost-Effective, Hands-Free Upgrade for Your Manual System

Retrofit an electronic flush valve onto an existing manual unit with a simple kit.



81T201HWA – Hardwire, 81T201BTA – Battery



Exposed Electronic Flush Valves with Wall Mount Sensors
81T201-WMSHW – Hardwire (water closet)
81T231-WMSHW – Hardwire (urinal)
81T201-WMSBT – Battery (water closet)
81T231-WMSBT – Battery (urinal)

- Featuring H₂Optics® Sensing Technology
- Chloramine-resistant diaphragm
- Electronic manual override button
- Vandal-resistant stainless steel cover
- Factory set to 1.6 gallon flush for water closets and 0.5 gallon flush for urinals—field adjustable



Electronic Urinal Flush Valve
81T231HWA – Hardwire
81T231BTA – Battery

- Featuring H₂Optics Sensing Technology
- Chloramine-resistant diaphragm
- Metal manual override button
- Replaceable lens window
- Factory set to 0.5 gallon flush—field adjustable



Electronic Water Closet Flush Valve
81T201HWA – Hardwire
81T201BTA – Battery

- Featuring H₂Optics Sensing Technology
- Chloramine-resistant diaphragm
- Metal manual override button
- Replaceable lens window
- Factory set to 1.6 gallon flush—field adjustable





Concealed Electronic Washdown Urinal Flush Valve
 1600T9001RI – Rough-in (hardwire)
 1600T9001TR – Trim (hardwire)

- Featuring H₂Optics Sensing Technology
- Electronic manual override button
- Vandal-resistant stainless steel cover
- Available in various rough-in and trim options
- Factory plumbed for easy installation
- Factory set to 0.5 gallon flush—field adjustable

Note: Model must be installed on fixtures providing sufficient air gap protection against backflow.



Concealed Electronic Flush Valve for Wall-Hung Water Closet
 1600T6103RI – Rough-in (hardwire)
 1600T6103TR – Trim (hardwire)

- Featuring H₂Optics Sensing Technology
- Electronic manual override button
- Water closet and urinal models available
- Vandal-resistant stainless steel cover
- Available in various rough-in and trim options
- Factory plumbed for easy installation
- Factory set to 1.6 gallon flush—field adjustable



Side Mount Electronic Flush Kit
 DEFM-100

- Retrofit model
- For use on 81T Teck[®] exposed manual flush valves and 86T flush valves for washdown urinals
- Can also be used on Sloan[®], Crane and some Zurn[®] models
- Standard infrared sensing
- Courtesy manual flush button
- Batteries included



Electronic Flush Retrofit Kit for Delta[®] Valves
 81T201BTA-20 – Battery (water closet)
 81T201HWA-20 – Hardwire (water closet)

- Retrofit model
- Featuring H₂Optics Sensing Technology
- Complete valve less stop, cover tube and wall flange
- Chloramine-resistant diaphragm
- Metal manual override button
- Replaceable lens window
- Factory set to 1.6 gallon flush—field adjustable



Electronic Flush Retrofit Kit
 81TWCBTRKA – Water closet
 81TURBTRKA – Urinal

- Retrofit model
- Featuring H₂Optics Sensing Technology
- Battery operation
- Converts manual exposed flush valves to electronics
- New diaphragm, seat and filter screen included
- For hardwire kit, order O61069A
- Replaceable lens window
- Factory set to 1.6 gallon flush for water closets and 0.5 gallon flush for urinals—field adjustable



Electronic Flush Retrofit Kit for Sloan/Zurn Valves
 81T231BTA-30 – Battery (urinal)
 81T231HWA-30 – Hardwire (urinal)

- Retrofit model
- Featuring H₂Optics Sensing Technology
- Complete valve less stop with modified tail to fit Sloan/Zurn stop
- Chloramine-resistant diaphragm
- Metal manual override button
- Replaceable lens window
- Factory set to 0.5 gallon flush—field adjustable



Electronic Washdown Urinal Flush Valve
 DEMD-86505

- Battery operation
- Standard infrared sensing
- Adjustable sensor range
- Remote control available
- Factory set to 0.5 gallon flush—field adjustable

Note: Model must be installed on fixtures providing sufficient air gap protection against backflow.



Hard-wire models are also available with the battery backup option referenced on page 6.

For additional information on the models shown here, as well as other available models, please go to www.specselect.com.



MANUAL FLUSH VALVES



Features of the Delta® Flush Valve:

- Non-hold open handle
- Chloramine-resistant diaphragm
- Easily adjustable settings
- All metal heavy-duty construction
- Optional trap seal primer
- Constant peak flow





**Water Closet Flush Valve
81T201**

- Chloramine-resistant diaphragm
- ADA vandal-resistant non-hold open handle
- Factory set to 1.6 gallon flush—field adjustable



**Urinal Flush Valve
81T231**

- Chloramine-resistant diaphragm
- ADA vandal-resistant non-hold open handle
- Factory set to 0.5 gallon flush—field adjustable



**Flush Valve for Washdown Urinal
86T505**

- ADA vandal-resistant handle
- Back inlet stop for 1/2" supply
- Factory set to 0.5 gallon flush—field adjustable

Note: Model must be installed on fixtures providing sufficient air gap protection against backflow.



For additional information on the models shown here, as well as other available models, please go to www.specselect.com.



smart + strong

Your work is important—it's our job to give you the right tools. That's why we design our healthcare products to be as innovative as they are reliable. So you can count on each one for the kind of technology and improvements that keep up with your ever-changing world, and for the kind of durability that stands the test of time.





SURGEON SCRUB UP



3000T3370A, 24T3003



Electronic Wall Mount Faucet
1501T4670

- Featuring H₂Optics® Sensing Technology
- Wall mount rigid gooseneck spout with integral sensor in base
- Adjustable sensing range and time out
- Battery operation
- Smooth-end spout with 1.5 gpm laminar flow



Electronic Deck Mount Faucet
1501T3370

- Featuring H₂Optics Sensing Technology
- Laminar 1.5 gpm flow control smooth-end rigid spout
- Adjustable sensing range and time out
- Battery operation
- Single-hole model—also available in 4" and 8" options



Electronic Deck Mount Faucet
3001T3420A

- Featuring H₂Optics Sensing Technology
- Control module with LCD screen—six programmable settings
- Battery operation
- 4" model—also available in single-hole and 8" options
- Rigid spout with 1.5 gpm vandal-resistant laminar outlet





Above Deck Mixing Valve for 1500T & 3000T Models
24T3003

- Single-control mixing valve
- Vandal-resistant 6" elbow handle
- Available lead-free Q3 2013



3000T Series Touch Pad Control Module with LCD Screen (Standard with 3000T Series Products)

Adjustable Settings

- Run time—length of time water runs after user removes hands from sensing zone.
- Sense time—response time for sensor to react to hands placed in sensing zone.
- Block time—time required between uses; prevents faucet from running water excessively.
- Sensor range—distance at which sensor detects hands in wash area.
- Auto timer—length of time before faucet stops running in the event the sensor is obstructed by foreign object.
- Metering mode—allows for continuous flow for a set amount of time (7 to 240 seconds, if enabled).
- Self tests for troubleshooting.
- Supplies diagnostic usage information.



3-Position Switch (060651A or -KS Suffix with 3000T Products)

- Designed so healthcare facilities can continue to follow infectious control procedures.

Switch Settings

- ON – Solenoid goes into continuous run so water lines can be flushed with high-temperature water.
 - Do not exceed 71° C (160° F) during flushing of lines as higher temperatures may damage sensor components.
- AUTO – Faucet functions according to regular settings.
- OFF – Solenoid is blocked from operating so cleaning staff can clean sink without faucet operating.

General Surgeon Scrub Up



Surgeon Scrub Faucet
54T5432A

- Floor mount self-close double foot pedal valve
- Deck mount rigid/swivel gooseneck spout
- Vandal-resistant 1.5 gpm laminar with Agion® antimicrobial outlet
- Available lead-free Q3 2013



Surgeon Scrub Faucet
54T5332A

- Wall mount self-close double foot pedal valve
- Deck mount rigid/swivel gooseneck spout
- Vandal-resistant 1.5 gpm laminar with Agion® antimicrobial outlet
- Available lead-free Q3 2013



For additional information on the models shown here, as well as other available models, please go to www.specselect.com.



LABORATORY



W6635DW

Services available for ball valves:

- Air
- Argon
- Carbon Dioxide
- Cold Water
- Helium
- Hydrogen
- Natural Gas
- Nitrogen
- Propane
- Vacuum

Refer to www.specselect.com for Valve/Service combination availability.



Single Shank Deck Mount Mixing Faucet W6760-9

- Dual-check in-line vacuum breaker
- 1/4" I.D. 10 serration nozzle outlet
- Maximum 1.5" diameter deck hole



Deck Mount Mixing Faucet W6700-9

- Dual-check in-line vacuum breaker
- 1/4" I.D. 10 serration nozzle outlet
- 2-hole installation at 2.75" centers—each hole from .875"-1.25" diameter



Deck Mount Single Water Valve W6600-10

- Angle atmospheric vacuum breaker
- 1/4" I.D. 10 serration nozzle outlet



Deck Mount Turret W6210GAS

- Single ball valve hose cock
- Available in multi-valve configurations for deck and wall mount



Deck Mount Turret W6220GAS

- Two ball valve hose cocks at 90°



Pure Water Faucet W6635DW

- Self-close Celcon® valve
- Gooseneck spout with Tygon® liner



BEDPAN CLEANSERS



Concealed Wall Mount
Bedpan Cleanser
53T5547

- Spout with double check vacuum breaker
- Reinforced hose and hanger
- Insulated handle on wand
- Spray outlet with stop
- Single-handle mixing control valve



Wall Mount Double Foot Pedal
Valve Bedpan Cleanser
54T1434A

- Wall-mounted vacuum breaker
- Reinforced hose and hanger
- Insulated handle on wand
- Spray outlet with stop



Wall Mount Bedpan Cleanser
54T1104

- Reinforced hose and hanger
- Insulated handle on wand
- Spray outlet with stop
- Double check vacuum breaker



54T1104

For additional information on the models shown here, as well as other available models, please go to www.specselect.com.



UNIVERSAL
DESIGN

compliance + brilliance

From wall-mount faucets to bath accessories, you'll find a wide variety of Delta® designs and configurations that combine function and form beautifully. Built for ADA-compliance, accessibility, and easy use, you'll never be short on options that keep your facility safe, useful and aesthetically pleasing.





SINGLE-HANDLE GENERAL SINK FAUCETS

ADA-Compliant Lever Handle

Allows you to carry a stylish design throughout your entire facility.

Adjustable Handle Limit Stop

Limits the movement of the handle into the “hot” zone.

DIAMOND™ Seal Technology

Utilizes a diamond-coated ceramic cartridge designed and tested to feel like new for life. Once inside the faucet, water is not in contact with metal contaminants.





**Single-Lever Kitchen Faucet
100LF-HDF**

- Vandal-resistant elbow handle and 1.5 gpm outlet
- 3-hole installation
- Adjustable handle limit stop
- Diamond-coated ceramic cartridge



**Single-Lever Kitchen Faucet
101LF-HDF**

- Vandal-resistant elbow lever handle
- Single-hole installation
- Adjustable handle limit stop
- 1.5 gpm outlet
- Diamond-coated ceramic cartridge



**8" Deck Mount Single-Lever Kitchen Faucet
400LF-HDF**

- Side sprayer
- Vandal-resistant elbow lever handle and 1.5 gpm outlet
- 3-hole installation
- Adjustable handle limit stop
- Diamond-coated ceramic cartridge



**Single-Lever Utility Faucet
710LF-HDF**

- Vandal-resistant elbow handle
- Adjustable handle limit stop
- 10"-high rigid spout
- 1.5 gpm vandal-resistant outlet
- Diamond-coated ceramic cartridge



**Single-Lever Pantry Faucet
27C643**

- Vandal-resistant lever handle
- CER-TECK® ceramic disk cartridge
- Rigid/swivel gooseneck spout; other types and sizes available



For additional information on the models shown here, as well as other available models, please go to www.specselect.com.



TWO-HANDLE GENERAL SINK FAUCETS

Seamless Brass Spout

Compared to traditional tubular spouts on the market, this spout boasts a .09" wall thickness, which provides superior force and vandal resistance.

Water-Efficient Outlet

Available in four optional reduced flow outlets, ranging from 0.5 gpm to 1.5 gpm.

Rigid/Swivel Gooseneck Spout

Optional brass collar is supplied to accommodate rigid or swivel installation needs. Limited swing also available.

Cast Brass Body

Construction of this faucet offers little opportunity for bacteria to collect and makes cleaning easy.





8" Cast Deck Mount Faucet
26C3942

- Vandal-resistant 4" hooded blade handles
- CER-TECK® ceramic disk cartridge
- 1.5 gpm outlet
- Rigid/swivel gooseneck spout



Single Shank Mixing Faucet
25C3847

- Vandal-resistant 2-1/2" balanced lever handles
- CER-TECK ceramic disk cartridge
- 1.5 gpm outlet
- Rigid/swivel gooseneck spout



8" Below Deck Mount Faucet
27C2923

- Vandal-resistant 1.5 gpm laminar with Agion® antimicrobial outlet
- Vandal-resistant 3" hooded lever handles
- CER-TECK ceramic disk cartridge
- Rigid/swivel gooseneck spout



4" Cast Deck Mount Faucet
27C4844

- Vandal-resistant 4" blade handles
- CER-TECK ceramic disk cartridge
- 1.5 gpm outlet
- Rigid/swivel gooseneck spout



4" Cast Deck Mount Faucet
27C5833

- Includes pop-up
- Vandal-resistant 1.5 gpm outlet and 3" hooded lever handles
- CER-TECK ceramic disk cartridge
- Rigid/swivel gooseneck spout



8" Center Wall Mount Pre-Rinse Faucet
55C1513

- Includes auto shut-off
- Vandal-resistant 3" hooded lever handles
- Supplied with standard water/energy-saving sprayhead with a flow rate of 1.6 gpm
- CER-TECK ceramic disk cartridge
- Optional 1.2 gpm spray face included
- Available lead-free Q3 2013



Four ADA Handle Options



1



- 4" Hooded Blade
(Available with optional red/blue temperature indicator)

2



- 3" Hooded Lever
(Available with optional red/blue temperature indicator)

3



- 4" Blade with Sanitary Hood
(Available with optional red/blue temperature indicator—shown above)

4



- 6" Wrist with Sanitary Hood

For additional information on the models shown here, as well as other available models, please go to www.specselect.com.



WALL MOUNT GENERAL SINK FAUCETS

Wall Brace

Reinforces the faucet-to-wall connection and helps to support heavy pails of water.

Body-Mounted Vacuum Breaker with Garden Hose End

The vacuum breaker prevents backflow of sinkwater into potable water system. The standard hose-end spout makes adding and removing garden hoses simple.

Integral Checks

Eliminate crossflow—preventing the hot water from traveling to the cold side and vice versa.

Integral Stops

Allow for ease of maintenance—no need to shut the entire water supply off when you can do it right at the faucet.





**8" Center Wall Mount Service Sink Faucet
28C2383**

- Adjustable top/bottom brace
- Body-mounted angle vacuum breaker with garden-hose end
- Includes integral check stops
- Vandal-resistant 3" hooded lever handles
- CER-TECK® ceramic disk cartridge



**8" Center Wall Mount Service Sink Faucet
28C8073**

- Spout end vacuum breaker with garden-hose end
- Includes 48" hose and stainless steel hanger
- Rough chrome-plated
- Includes integral check stops
- Vandal-resistant 3" hooded lever handles
- CER-TECK ceramic disk cartridge



**8" Center Wall Mount Sink Faucet
28C6932**

- Includes integral check stops
- Vandal-resistant 1.5 gpm outlet and 4" hooded blade handles
- CER-TECK ceramic disk cartridge
- Rigid/swivel gooseneck spout



**8" Center Wall Mount Service Sink Faucet
28T9**

- Includes integral stops
- ASSE-approved integral vacuum breaker with garden-hose end
- Metal cross handles
- Compression cartridge
- Rough chrome-plated



**8" Center Wall Mount Sink Faucet
28C4434**

- Vandal-resistant 1.5 gpm outlet and 4" blade handles with sanitary hood
- CER-TECK ceramic disk cartridge
- 11" tubular swing spout



**8" Center Wall Mount Sink Faucet
28P4402LF**

- Cast body
- Vandal-resistant 1.5 gpm outlet and hooded blade handles
- 8" long spout—swings 360°
- Less integral stops



For additional information on the models shown here, as well as other available models, please go to www.specselect.com.



BATH ACCESSORIES



Grab Bars



1-1/2" x 24" Grab Bar
40124-SS

- Stainless Steel finish
- For persons up to 500 pounds
- Concealed mounting
- Also available in lengths of 18", 30", 36", 42", and 48"



1-1/4" x 24" Grab Bar
41124-SS

- Stainless Steel finish
- For persons up to 500 pounds
- Concealed mounting
- Also available in lengths of 18", 30", 36", and 42"



1-1/4" x 24" Grab Bar With Decorative Flange
41224-SN

- Satin Nickel finish
- For persons up to 500 pounds
- Concealed mounting
- Also available in 18" length



Bathroom



24" Brass Towel Shelf With Towel Bar
43024

- Concealed mounting
- Mounting hardware included



24" Brass Towel Shelf With Double Towel Bar
43424

- Concealed mounting
- Mounting hardware included



1" x 5' Bow Shower Rod With Brackets
42205-ST

- Adjustable length
- Oval design prevents rotation
- Also available in 6' length



Recessed Paper Holder with Plastic Roller
45070-ST

- Plastic spring-activated roller
- Twin side-by-side model available



Recessed Extra Roll Paper Holder
45470-ST

- Plastic spring-activated roller
- Stores extra roll behind roll in use



Twin Paper Holder
45272

- Two brass spring-activated rollers

Public Washroom



Recessed Towel Dispenser and Waste Receptacle
45568-SS

- Holds 475 multi-fold or 350 C-fold towels
- Removable 2-gallon waste receptacle
- Includes tumbler lock and key



Vertical Liquid Soap Dispenser
44080-SS

- 40 oz. capacity
- Shut-off soap valve
- Mounting hardware included



Toilet Seat Cover Cabinet
49000-SS

- 500 seat cover capacity
- Mounting hardware included

Exclusive benefits from MultiChoice Universal.



Eliminates the Wrong Valve in the Wall.

Now you don't have to worry about ordering and installing the wrong valve, no matter which tub/shower your customer chooses.

Flexibility Throughout the Building Process.

Changes to the shower can be made at any time in the building process without altering the behind-the-wall plumbing.

Saves Time and Hassle.

Streamlines the whole plumbing and product installation process.

Temperature Accuracy.

More refined temperature limit stop allows you to set temperatures more precisely.






Mounting Bracket

Provides a sturdy method to secure the valve to a stringer and prevents rocking.

Square Plasterguard

The size of a standard tile allows for simple 90° cuts. Snaps into place with no tools required to remove.

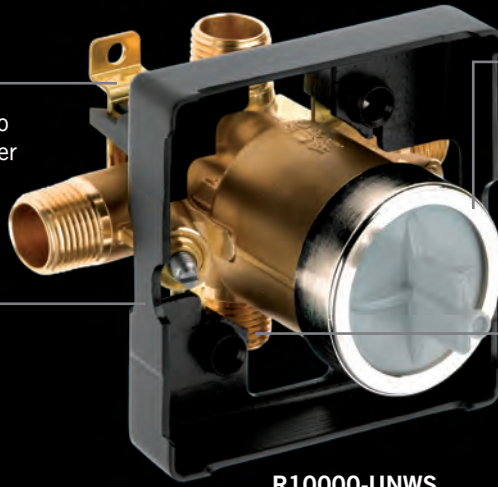

R10000-UNWS

Heat-Resistant Pressure Test Cap

Allows for air or water testing before the valve cartridge is installed up to 300 psi. Easy access for flushing out the system.

Three Connection Types

Provides universal connection options for every type of piping —IPS, PEX and UNIVERSAL.

One rough. Unlimited possibilities.



R10300-UNWS MultiChoice Universal Valve Body with Push-Button Diverter

WS—with stops recommended for 'Commercial' applications.



Single-Function Pressure-Balanced Valve Cartridge

Functions with a single control for temperature only.



Dual-Function Thermostatic Valve Cartridge

Keeps water temperature consistent by actually measuring and monitoring the temperature of the water and automatically adjusting the water mix to maintain a more precise water temperature.



TUB AND SHOWER

Adjustable Showerhead

Allows users to select their preference between full, massage and combination settings.



Diverter Valve

Makes it easy for the user to switch between the showerhead and handshower.



MultiChoice® Universal

Provides unparalleled flexibility with multiple cartridge options.



ADA Slide Bar

When installed according to spec, this stainless steel bar serves as both a slide bar and an ADA-compliant bar.



Optional Double Spiral Hose

This hose is ideal for commercial applications.

Add-On Options:

- Quick disconnect for hose
- Longer slide bar
- Adjustable volume control





Tub and Shower
T13H283 – Trim
R10000-UNWS – Rough-in

- MultiChoice® Universal pressure balance tub and shower
- H₂Okinetic® water-efficient 1.5 gpm showerhead
- Vandal-resistant lever blade handle
- Escutcheon with non-removable red/blue marking



Shower
T13H123 – Trim
R10000-UNWS – Rough-in

- MultiChoice Universal pressure balance shower
- Touch-Clean® 3-setting 2.0 gpm showerhead
- Vandal-resistant lever blade handle
- Escutcheon with non-removable red/blue marking



Tub and Shower
T13H232 – Trim
R10000-UNWS – Rough-in

- MultiChoice Universal pressure balance tub and shower
- Water-efficient 1.5 gpm showerhead
- Escutcheon with non-removable red/blue marking



Shower
T17TH125 – Trim
R10000-UNWS – Rough-in

- TempAssure® thermostatic shower
- Touch-Clean 3-setting 2.0 gpm showerhead
- Non-removable red/blue indicators
- Tub and shower trim models available



Shower and Handshower with Wall Bar
T13H322-20 – Trim
R10700-UNWS – Rough-in

- MultiChoice Universal pressure balance shower with diverter valve
- Touch-Clean 3-setting 2.0 gpm showerhead
- 1.5 gpm handshower with 24" stainless steel bar with ADA adjustable slide
- Brass double spiral hose
- Water-efficient configuration available
- Escutcheon with non-removable red/blue marking
- Two check valves in handshower



Handshower with Wall Bar
T17TH155 – Trim
R10000-UNWS – Rough-in

- TempAssure thermostatic shower—2.5 gpm
- 24" stainless steel bar with ADA adjustable slide
- Non-removable red/blue indicators
- Vandal-resistant lever handle
- Two check valves in handshower



Tub and Shower
T13490 – Trim
R10000-UNWS – Rough-in

- MultiChoice Universal pressure balance tub and shower
- Touch-Clean 2.0 gpm showerhead
- Red/blue indicators
- Vandal-resistant lever blade handle



Push-Button Tub and Shower
T13691 – Trim
R10300-UNWS – Rough-in

- MultiChoice Universal pressure balance tub and shower
- Touch-Clean 2.0 gpm showerhead
- Integral push-button diverter
- Non-removable red/blue indicator



Push-Button Electronic Shower
860T167 – Hardwire
861T167 – Battery

- Available with various mixing and showerhead options
- Field adjustable shower times
- Vandal-resistant 1.5 gpm showerhead





SHOWERHEADS AND DRAINAGE



RP46384



3-Setting Touch-Clean® Showerhead
RP43381
■ 2.0 gpm



Touch-Clean Showerhead
RP38357
■ 2.0 gpm



Touch-Clean Showerhead
061048A
■ 1.5 gpm



Touch-Clean Handshower
061049A
■ 1.5 gpm



Cast Lavatory Waste
33T260-1
■ Open grid strainer less overflow holes
■ With overflow holes model available (33T260)
■ Less overflow holes, with splash reduction drain cover (33T260-1DC)



Cast P Trap
33T311 – 1-1/4"
33T360 – 1-1/2"
■ With cleanout



Standard Brass Fixed Spray Showerhead
060890A
■ 2.2 gpm
■ Chrome



30° Vandal-Resistant Cast Wall Mount Showerhead
060793A
■ 2.0 gpm
■ Chrome



H2Okinetic® Water-Efficient Showerhead
RP46384
■ 1.5 gpm



Cast Lavatory Waste
33T290-1
■ Offset open grid strainer less overflow holes
■ With overflow holes model available (33T290)
■ Less overflow holes, with splash reduction drain cover (33T290-1DC)

060710A
■ Arm and flange

060991A
■ 1.75 gpm

061011A
■ 1.5 gpm



EXPLORE EVEN MORE INNOVATION.

DELTA COMMERCIAL
see what Delta can do

Products Smart Solutions Support and Resources SpecSelect

WHERE TO BUY search

Proximity™ Sensing Technology

watch video learn more more smart solutions

Proximity™ Sensing Technology is the next generation in responsive hands-free functionality. This revolutionary technology transforms the entire faucet into a sensor, automatically responding when approached.

SpecSelect®

New Products

Responsible. Resourceful.™

Project Categories

Home | Company | News | Spec Binder | CEU Courses | Green at Delta | Project Categories | Case Studies | Contact Us

There's more to see on our websites: deltacommercialfaucets.com and specselect.com

www.deltacommercialfaucets.com

- Featuring a detailed look at up to 200 of our core commercial products

www.specselect.com

- Featuring a detailed look at our complete 20,000 model commercial product offering
- Includes our unique dynamically created model-specific spec sheets for all models
- Includes our unique dynamic product selection guidance system, that ensures only valid product models can be selected

Everything you need to make your selection easier is right online at deltacommercialfaucets.com and specselect.com. If you have any additional questions, contact us at 800.345.DELTA.

Delta Commercial Technical Service
800.387.8277

DELTA COMMERCIAL **specselect**

Catalog Index Parts Commercial Site

Welcome to SpecSelect®

learn more more features

This state-of-the-art tool delivers exact, specific, and instantaneous information for sourcing commercial products. Explore over 40,000 models for all your project needs whether renovating a healthcare facility, designing a hotel, or specifying a new college, you won't find a more comprehensive online catalogue than SpecSelect®.

Catalog Index Parts Commercial Site

Site Requirements | Contact Webmaster | Quotation Editor | Favorites | Privacy Statement | About SpecSelect | Contact Information



Delta® is committed to providing smart water delivery solutions that maximize water savings without sacrificing comfort and convenience. Our commitment to environmental responsibility extends to waste reduction and the preservation of natural resources. That's why we choose to print on Forest Stewardship Council® (FSC) certified paper.



see what Delta can do™

A MASCO COMPANY

Delta Faucet Company
55 E. 111th St., P.O. Box 40980
Indianapolis, IN 46280

Masco Canada Limited
350 S. Edgeware Rd.
St. Thomas, Ontario N5P 4L1

deltafaucet.com
800.345.DELTA (3358)

Delta Commercial Technical Service
800.387.8277

©2013 Masco Corporation of Indiana
DL-1807 07/13