




Home Automation Systems  
for Hotel, Office, & Home


Intelligent System Easy Life

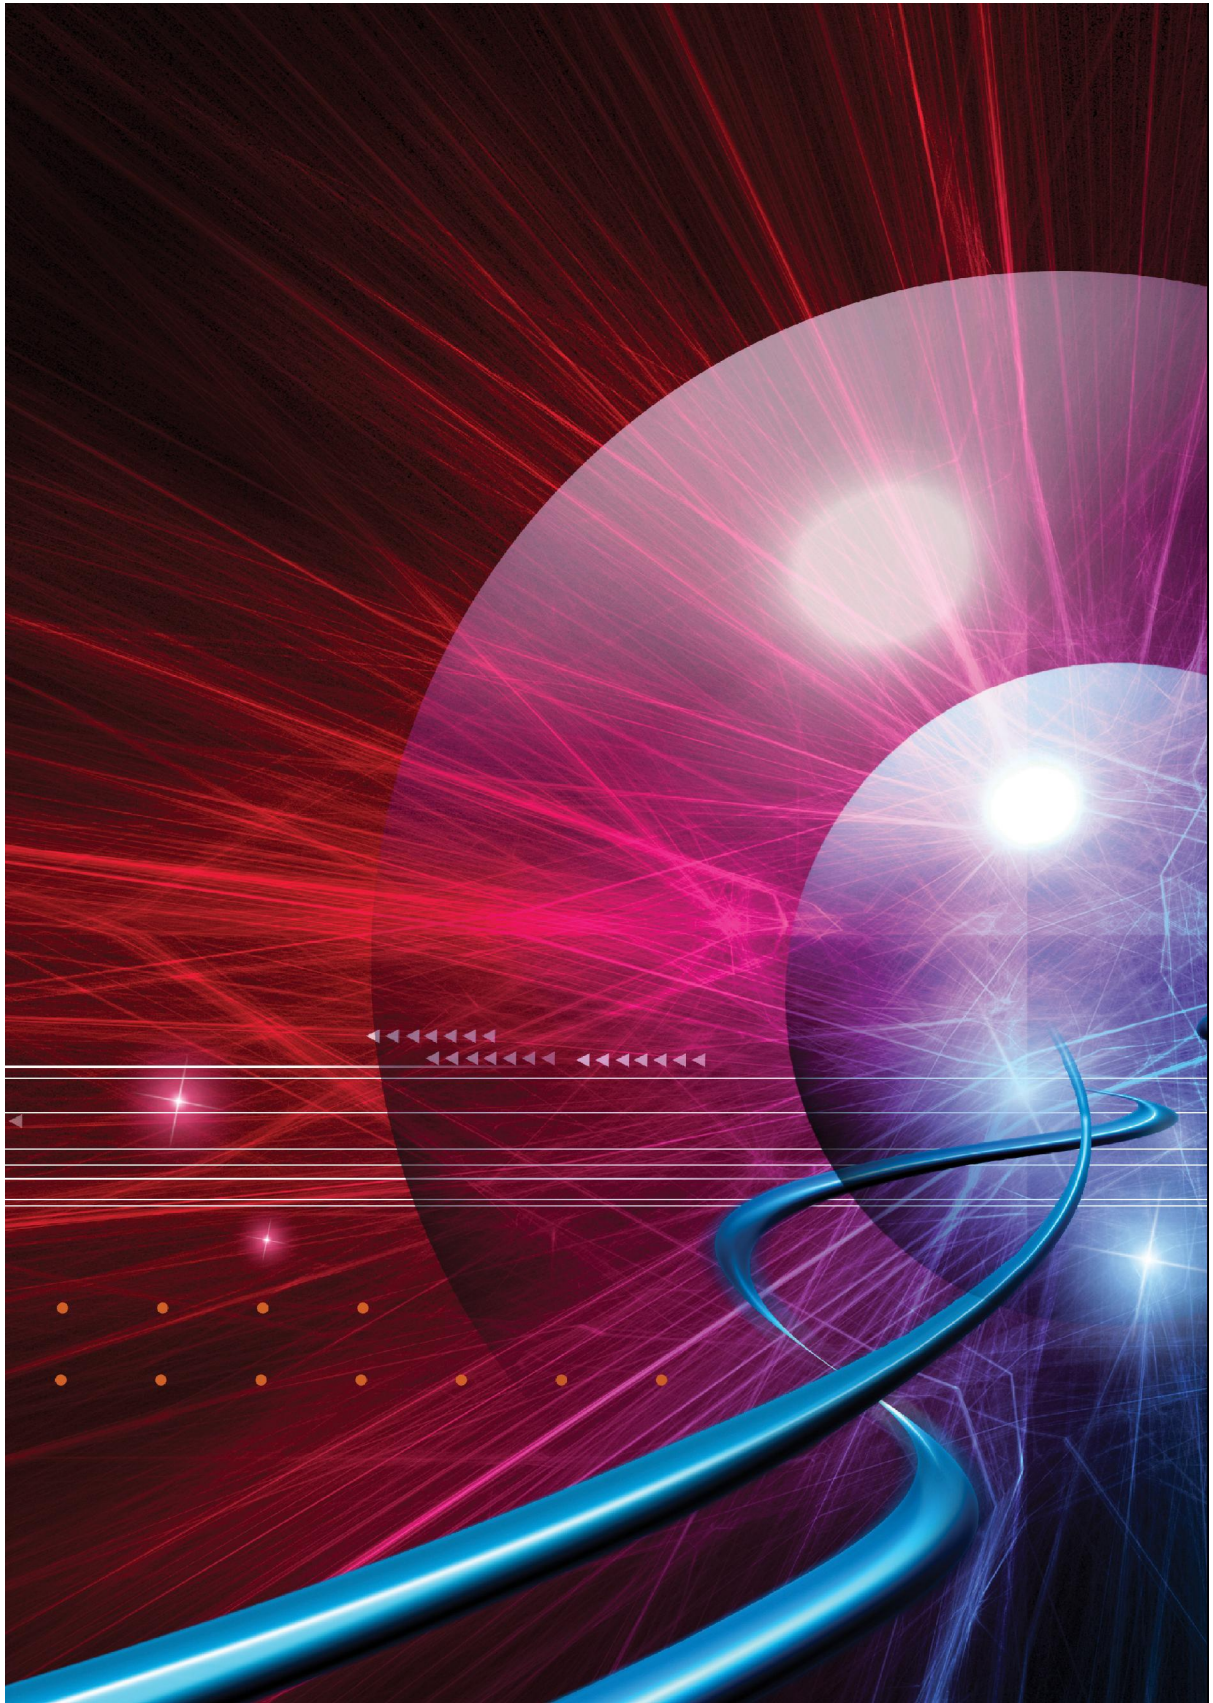

# INDEX

<b>Company Profile</b>	5 - 8
<b>2000 Series</b>	9
Intelligent Door bell system	10 - 13
Intelligent Energy Saver	14 - 17
Intelligent Touch Panel	18 - 23
Outline Border	24 - 25
<b>2300 Series</b>	27
Intelligent Door bell system	28 - 31
Intelligent Energy Saver	32 - 33
Intelligent Touch Panel	34 - 35
Electronic Room Thermostat	36 - 39
Acoustics System	40 - 41
Outline Border	42 - 43
Intelligent Remote	44 - 45
Intelligent energy saver card	46



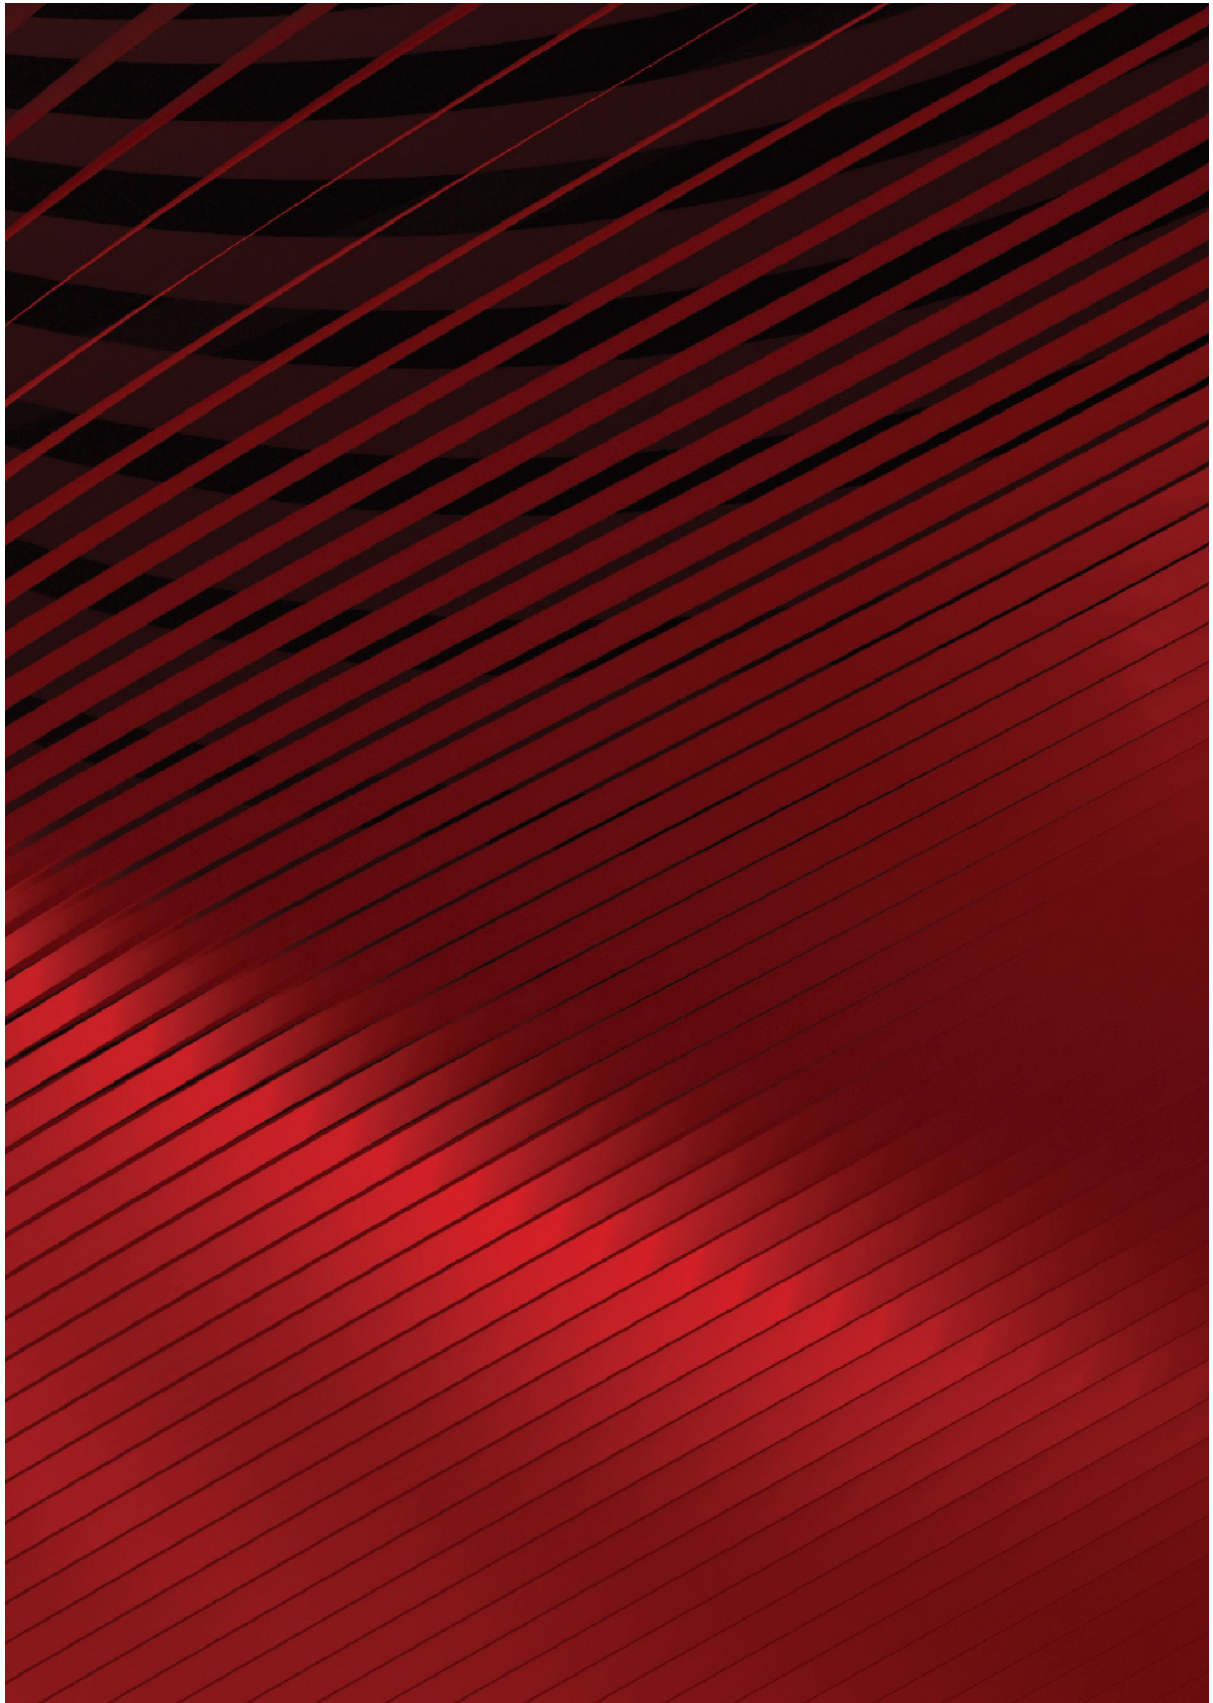





# COMPANY PROFILE

The Digital Touch Division of Techno-Mix FZCO has adopted hotel and home automation systems since 2003 and recently joined in collaboration with Speedkey International Group, located in United Kingdom, Hong Kong and now in the United Arab Emirates. Digital Touch Div. now offers homeowners and contractors a large variety of affordable home automation products.

Digital Touch Div. was started with the premise that home automation should not be just for the rich. We would like to think that we have been instrumental in bringing home automation to the typical home, thanks to our wide variety of affordable products.

Over the years, Digital Touch Div. has grown from a distributor of technical products to one of the world's best hotel and home automation suppliers and has become a single, usable source for high tech, affordable home automation products that can be installed safely by the average user.

Digital Touch Div. management engaged themselves with a mission to deliver top-quality home automation products that can help make your home smarter and a better living environment. Digital Touch Div. built a great team of professionals who are dedicated to serving you better.

With the recent release of Speedkey Touch Panel Designs and products, Digital Touch can supply touch panel/switches for lighting, dimmer, curtain controller, and air conditioning controller, all based on the touch panel technology, with the advantages of using handheld remote control to fully control your home.

These smart products provide simple solutions to everyday problems for extra convenience as well as adding value to your home, office and hotel rooms.

Thank you for letting Digital Touch Div., be your home automation superstore.

# Home System

## Intelligent System Easy Life



### Sleep Scene

Just touch the panel gently; the peaceful sleep environment will come for you.




### Leave Home Scene

Turn off all lights, air-conditioning and all home appliances.



### Back to Home Scene

Scene control for the lighting in living room, corridor, and passages, welcomes the host back home or welcomes the visitor.



### Bath Scene

One key can achieve a total relaxed bath environment in a bathroom.

## System Characteristics

- The system adopts simple series connection, with support for installation of hot-attachable plug and play.
- The system is a bus-type system without a main-controller, with a modular structure to ensure the reliability of the whole system.
- Convenient, Flexible - Home switches are under your control at any moment, everywhere.
- Personalised design - Multi-scene for your preference.
- Noble and elegant - a combination of high-tech and high-taste shows worshipful standing.
- Well-appointed function - thoughtful designs give pleasantness in function.
- Safe and reliable - individual modular structure gives you more reassurance.
- Integrated control of central air-conditioning, adjust the temperature automatically.
- Backlight touch button indication.
- Touch panel buttons combining icons and words.
- It is a high-quality life experience for you.

# Hotel System

## Intelligent System Easy Life



### Welcome scene

A welcome scene can make lights in the living room illuminate when the guests come.




### Meeting scene

Touch it, harmonious and pleasant meeting environment here



### Bathroom scene

In the hotel's bathroom, one key can achieve a relaxed bath environment. That proves the thoughtful service.



### Sleep scene

Just touch the panel gently, the peaceful sleep environment will come for you.

## The Performance Of The Intelligent Guest Room Center Management System

- The system is a bus-type system without mainframe, with a modular structure to ensure the reliability of the whole system.
- Particular welcome—mode makes the guest feel at home.
- Kinds of scene such as meeting, sleep meet different occasion requirement.
- Elegant appearance design approves the taste of hotel
- Personalized function design is fit for different room.



## Office System

### Intelligent System Easy Life



#### Office

read scene, work scene, rest scene, brightness leveled automatically scene, One key can regulate the lights and achieve lamplight scene switchover



#### Reception area

light scene control in reception room, corridor, and passage. Welcome guest come.



#### Meeting area

lights' brightness turns up automatically, air-conditioner turns on automatically, Projection screen releases automatically, attendants enter.



#### Showroom

### Performance Of System

- The system adopts simple series connection, with support for installation of hot-attachable plug and play.
- The system is a bus-type system without mainframe, with a modular structure to ensure the reliability of the whole system.
- Integrate the control of the central air- conditioner.
- Multi – functional scene design helps you save cost.
- Elegant appearance gives you modern office environment.
- Personalized control system help to enhance working efficiency.
- Integrate the control of the central air-conditioner, test the temperature automatically.
- Backlight button indication.
- Touch panel buttons combining icons and words.

### Preset Scenes In The Office

- Business scene
- Meeting scene
- Display scene
- Projection scene
- Confidential scene
- Background music scene



Intelligent System Easy Life

# 2000 - Series



SK-DB2000  
Intelligent  
Door bell system



## System Components (SK-DB2000SYS)



SK-DB2000sys



SK-DB2000sys



SK-DB2000M

## Intelligent Door Bell System

### A - Characteristics

- Innovative design, convenient and simple operations.
- Super-luxurious design of appearance. Made of ABS fire resistant, insulating and overall metal materials with plurality of optional colors.
- Besides LED backlight touch button controls on/off, the indicator's position is very clear and the design meets modern trends. It can also be easily identified at night.
- With MCU programmable circuit control and 1 gang for don't disturb another for make up, it can completely replace traditional mechanical switch. When the "do not disturb" indicator is lighted, the doorbell will not ring, and the "do not disturb" indicator will flash. Thus it can fully embody intelligence and advanced technology of this product.
- EEPROM can permanently keep parameters setting by the user during power cut.
- Suitable for decorative design homes, office buildings, and star hotels.

### B - Appearance Introduction

- Zinc alloy plate
- Finish of cover: pearl chrome (PCR)/ Satin Chrome (CCF)/zirconium gold (PVD)/Bright chrome
- Dimension 86\*86\*46mm
- Standard BS4662 base box with embedding installation


### C - Specification

- Input: 100-240V AC
- Current power: 300w/600w



SK-DB2001  
Intelligent  
Door bell system

## Structure Sketch For Customized Door Bell System

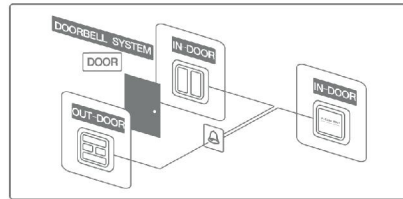

## System Components (Sk-Db2001sys)



SK-DB2001SYS



SK-DB2001 sys



SK-PW2000




SK-DB2001M



# SK-ES2000

Intelligent  
Energy Saver

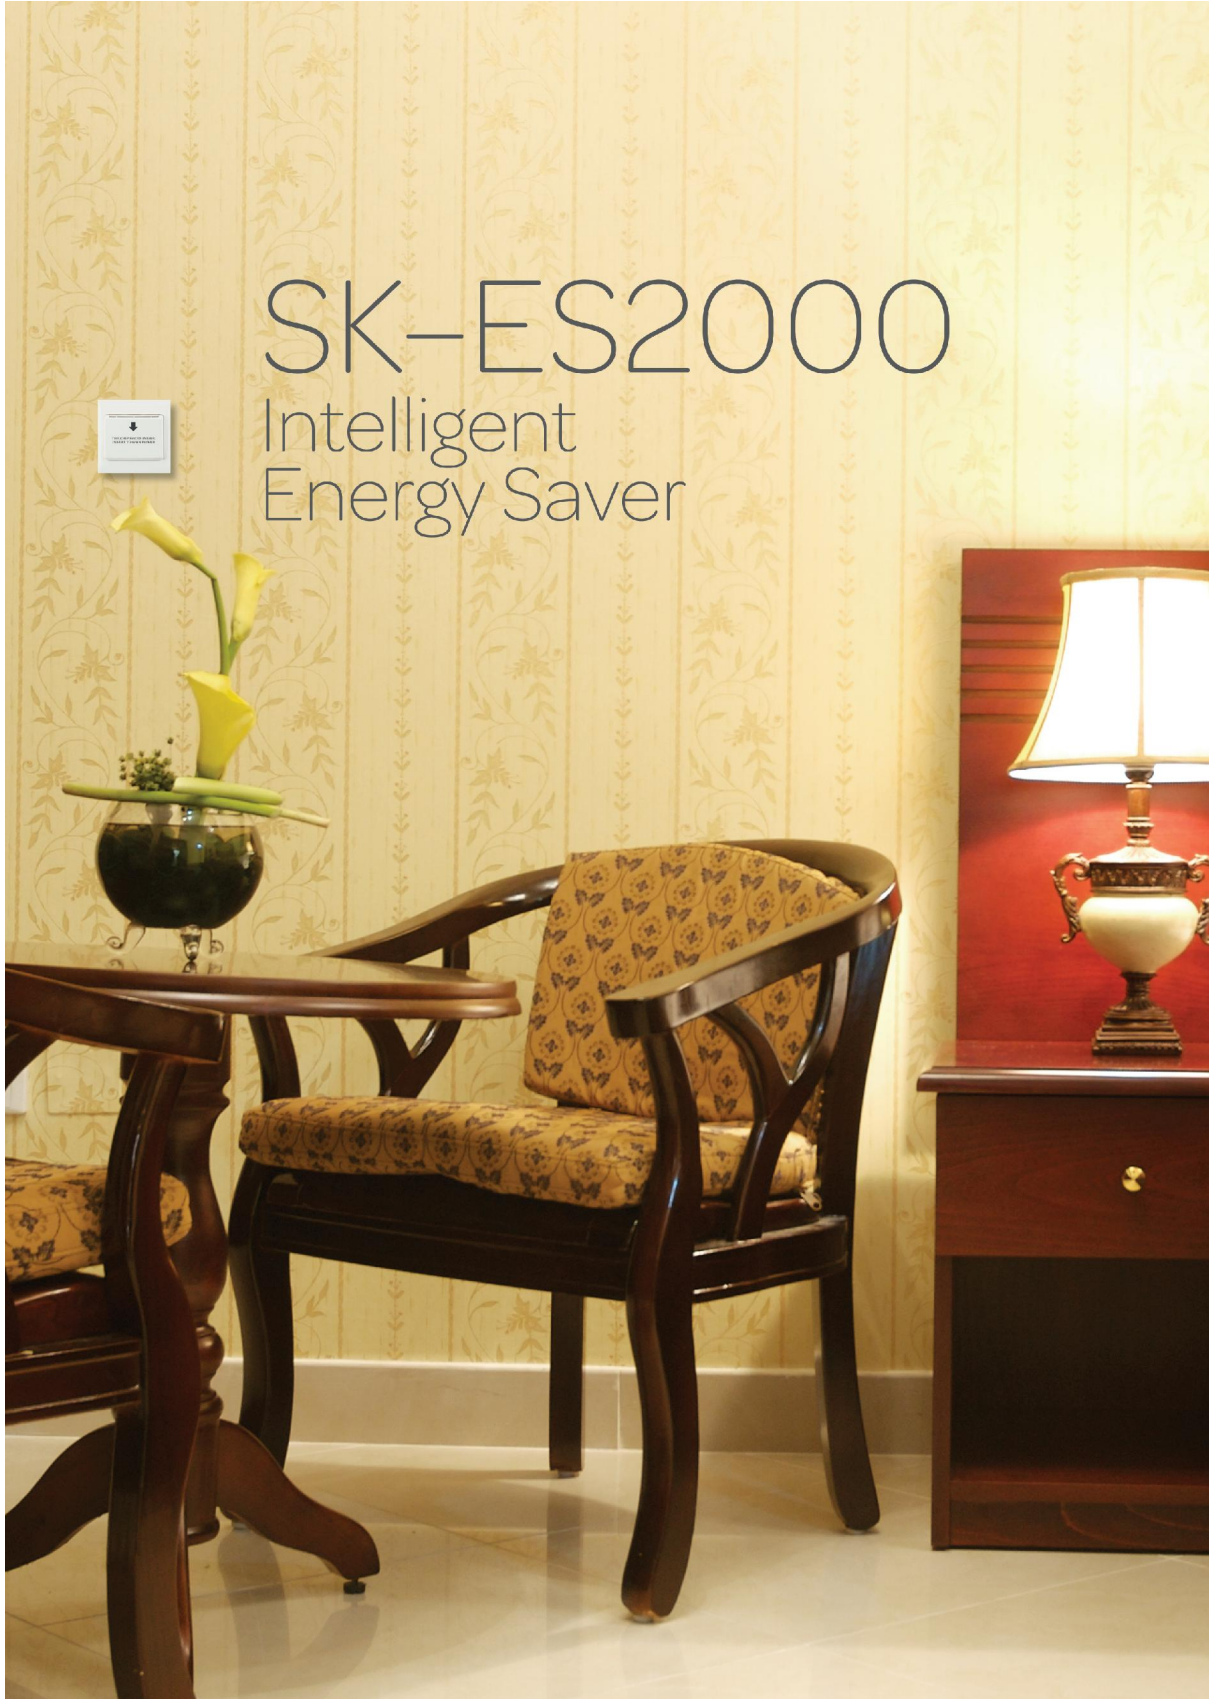

## Product Display



**SK-ES2000N**

### Normal intelligent energy saver

#### A - Characteristics

Any cards can be inserted for power. The relay is activated for power through obstructing the infrared signal. It is common type of card control and is suitable for general energy-saving management control.

#### B - Appearance Introduction

- Finish of cover: Pearl chrome (PCR)/Satin chrome (CCR)/Zirconium Gold (PVD)/Bright chrome/ABS
- Dimension: 86\*86\*42mm
- Standard BS4662 base box with embedding installation

#### C - Specification

- Input: 100-240V AC
- Current loading: 16A (Max 30A)



**SK-ES2000IC**

### IC intelligent energy saver

#### A - Characteristics

Only the specified IC card can be used for power. Power can only be gained via IC card issued by our company instead of any other invalid card.

#### B - Appearance Introduction

- Finish of cover: Pearl chrome (PCR)/Satin chrome (CCR)/Zirconium Gold (PVD)/Bright chrome/ABS
- Dimension: 86\*86\*42mm
- Standard BS4662 base box with embedding installation

#### C - Specification

- Input: 100-240V AC
- Current loading: 16A (Max 30A)

## Intelligent Energy Saver

The energy saver is designed elaborately for hotels by our company. When the customers checks in, inserts the card to the energy saver switch to turn on lightings, TV, air-conditioner and so on. When the customer leaves the room, takes out the card and the master power supply will be cut off automatically with time-delay, which can achieve energy saving as well as safety.





SK-ES2000  
Intelligent  
Energy Saver



## Product Display



**SK-ES2000RF**

### RF intelligent energy saver

#### A - Characteristics

Only specified RF inductive card can be used for power. Power can only be gained via common low frequency RF inductive card issued by our company instead of any other invalid card.

#### B - Appearance Introduction

- Finish of cover: Pearl chrome (PCR)/Satin chrome (CCR)/Zirconium
- Gold (PVD)/Bright chrome/ABS
- Dimension: 86\*86\*42mm
- Standard BS4662 base box with embedding installation

#### C - Specification

- Input: 100-240V AC
- Current loading: 16A (Max 30A)



**SK-ES2000M1**

### M1 intelligent energy saver

#### A - Characteristics


Only specified RF (MIRAFE-1 all-in-one card) inductive card can be used for power. Power can only be gained via specified high frequency RF inductive card (-1 all-in-one card) issued by our company instead of any other invalid card.

#### B - Appearance Introduction

- Finish of cover: Pearl chrome (PCR)/Satin chrome (CCR)/Zirconium
- Gold (PVD)/Bright chrome/ABS
- Dimension: 86\*86\*42mm
- Standard BS4662 base box with embedding installation

#### C - Specification

- Input: 100-240V AC
- Current loading: 16A (Max 30A)

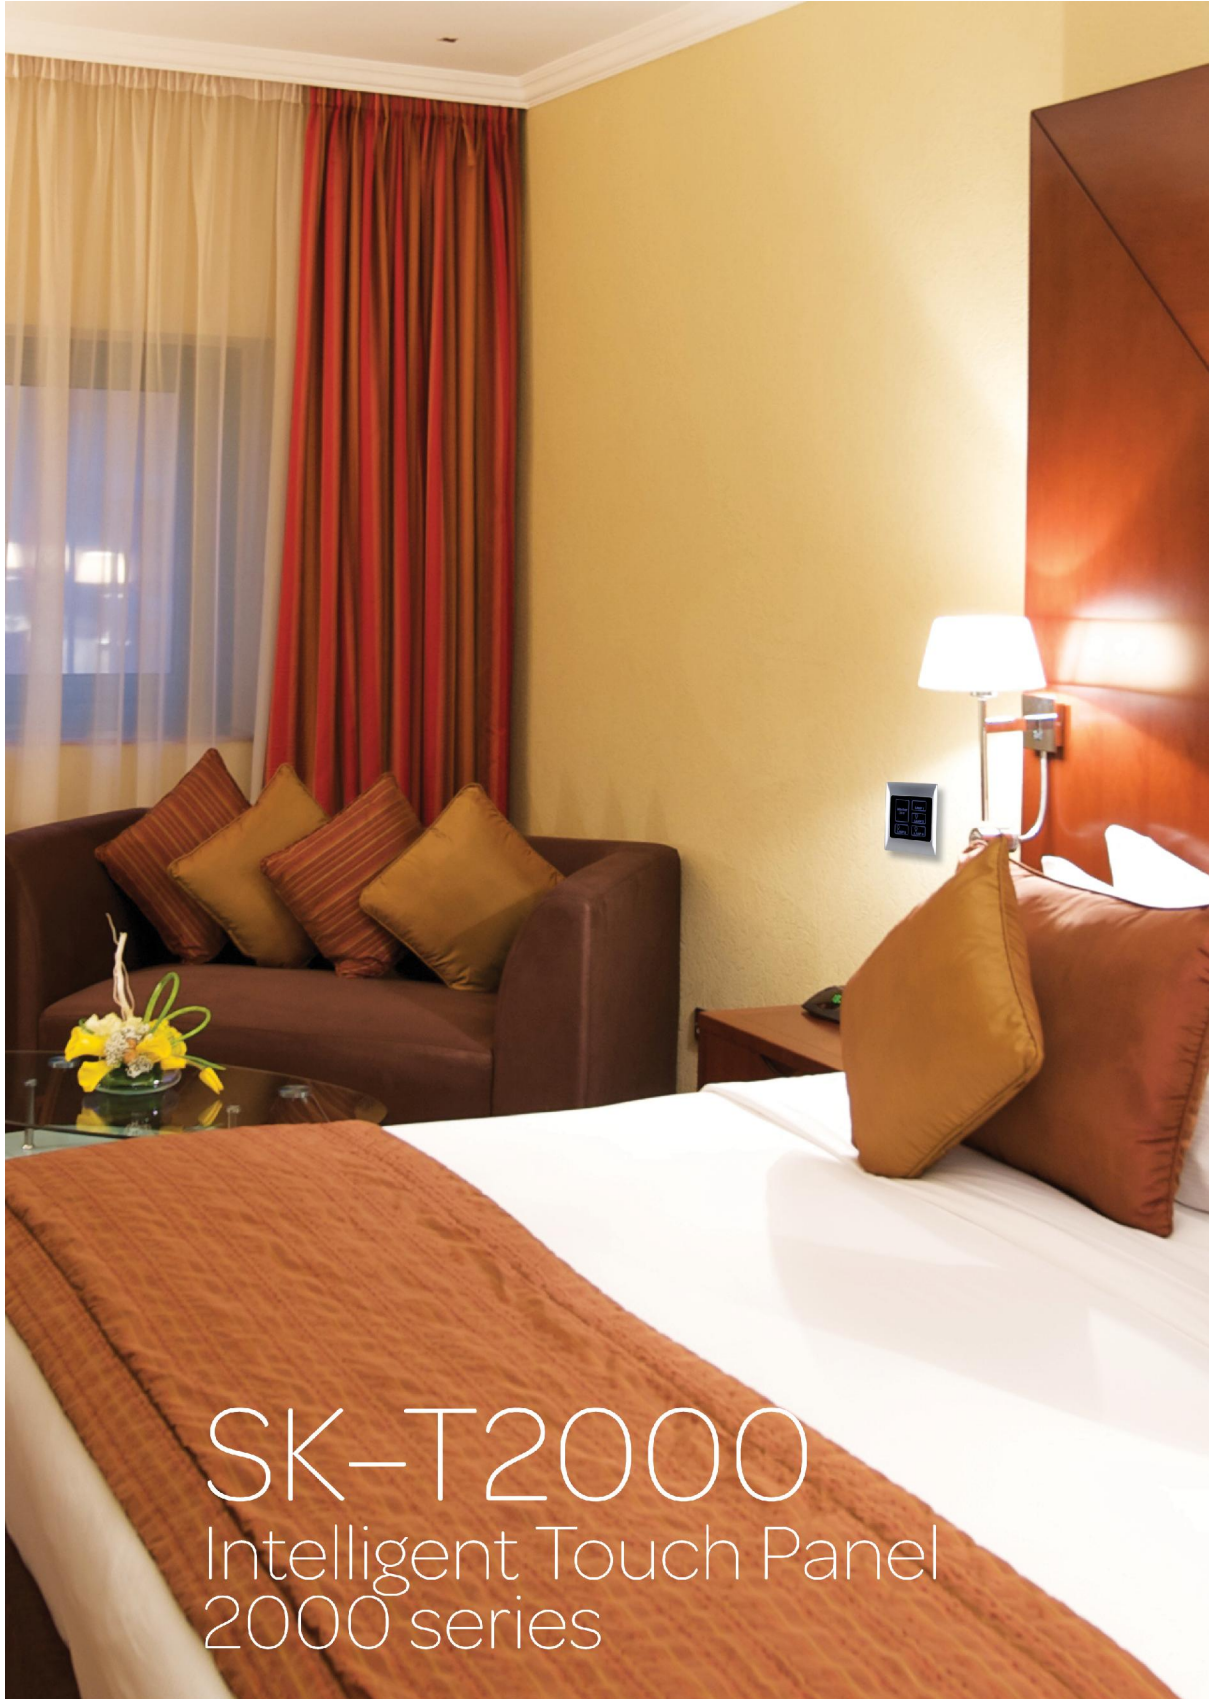

SK-T2000  
Intelligent Touch Panel  
2000 series

## Product Display

4A Switch



SK-T2000L1



SK-T2000L2



SK-T2000L3



SK-T2000L4



SK-T2000L3 - M



SK-T2000L4 - M

## Intelligent Touch Panel

### A - Characteristics

- Infrared remote control function
- Besides LED backlight touch button controls on/off, the indicator's position is very clear and the design meets modern trends. It can also be easily identified at night.
- Innovative design, easy and convenient operation
- Super – luxurious design of appearance. Made of ABS fire resistant, insulating and overall metal materials
- Suitable for decorative design in homes, office buildings, and star hotels

### B - Appearance Introduction

- Zinc alloy cover plate
- Finish of cover: Pearl chrome(PCR)/Satin chrome(CCR)/Zirconium gold(PVD)/Bright chrome.
- Dimension: 86\*86\*46mm
- Standard BS4662 base box with embedding installation

### C - Specification

- Input: 100-240V AC
- Current Loading: 4A/10A





## Product Display

10A Switch



SK-T2000H1



SK-T2000H2

## Intelligent Touch Panel

### A - Characteristics

- Infrared remote control function
- Besides LED backlight touch button control on/off, the indicator's position is very clear and the design meets modern trends. It can also be easily identified at night.
- Innovative design, easy and convenient operation
- Super-luxurious design of appearance. Made of ABS fire resistant, insulating and overall metal materials
- Suitable for decorative design in homes, office buildings, and star hotels

### B - Appearance Introduction

- Zinc alloy cover plate
- Finish of cover: Pearl chrome (PCR)/Satin chrome (CCR)/Zirconium Gold (PVD)/Bright chrome
- Dimension: 86\*86\*46mm
- Standard BS4662 base box with embedding installation

### C - Specification

- Input: 100-240V AC
- Current loading: 4A/10A



## Product Display



SK-T2000C1



SK-T2000C2

## Intelligent Curtain

### A - CHARACTERISTICS

- Protection function: it will cut off the power automatically for protection after running curtain motor for 1 minute (Project user can customize the time). This function can protect the motor system as well as save energy.
- Reverse operation should be proceeded after stop it. This helps user get appropriate control measurement, efficient, safe and reliable.
- Miniset/SK-Handy infrared remote is optional for your wireless remote control.  
The straight line distance for the remote can be more than 10 meter so as to be at user's pleasure.
- Innovative design, easy and convenient operation
- Besides LED backlight touch button control on/off, the indicator's position is very clear and the design meets modern trends. It can also be easily identified at night.
- Suitable for decorative design in homes, office buildings, and star hotels

### B - Appearance Introduction

- Zinc alloy cover plate
- Finish of cover: Pearl chrome (PCR)/Satin chrome (CCR)/Zirconium Gold (PVD)/Bright chrome
- Dimension: 86\*86\*46mm
- Standard BS4662 base box with embedding installation

### C - Specification

- Input: 100-240V AC
- Current loading: 4A/10A





SK-T2000D  
Intelligent Touch Panel  
2000 series

## Product Display

For Incandescent Lamp



SK-T2000D1(300W)



SK-T2000D2(300W)



SK-T2000DH1(600W)



SK-T2000T1(0~10V)



SK-T2000T2(0~10V)

Intelligent System Easy Life

## Intelligent Dimmer

### A - Characteristics

- Incandescent lamp dimmer can regulate the brightness of incandescent lamp with the features of wide range brightness regulation and excellent operation performance.
- It is real energy saving while the incandescent lamp brightness is regulated to be darker than that in normal working status.
- Touch the panel key slightly and easy to control Fluorescent light on/off and the brightness regulation. Whether sunny day or rainy day, you can get your favorite brightness.
- 0~10Vdc regulable voltage controls the brightness of fluorescent light. Brightness range: 5%~100% wide range of regulation and high sensitivity.
- Infrared remote control function
- Besides LED backlight touch button control on/off, the indicator's position is very clean and the design meets modern trends. It can also be easily identified at night.

### B - Appearance Introduction

- Zinc alloy cover plate
- Finish of cover: Pearl chrome (PCR)/Satin chrome (CCR)/Zirconium Gold (PVD)/Bright chrome
- Dimension: 86\*86\*46mm
- Standard BS4682 base box with embedding installation

### C - Specification

- Input: 100-240V AC
- Current loading: 4A/10A





Outline Border

## Product Display



Bright Chrome  
SCR



PVD Bright Gold  
SCR-PVD



Pearl Chrome  
PCR



Satin Chrome  
CCR



Satin/Zirconium Gold  
CCR+PVD



ABS


## Outline Border

### A - Characteristics

- Innovative design
- Super-luxurious appearance. Made of ABS fire resistant, insulating and overall metal materials
- Suitable for decorative design in homes, office buildings, and star hotels

### B, Appearance Introduction

- Zinc alloy cover plate
- Finish of cover: Pearl chrome (PCR)/Satin chrome (CCR)/Zirconium Gold (PVD)/Bright chrome/ABS
- Dimension: 86\*86mm
- Standard BS4662 base box with embedding installation

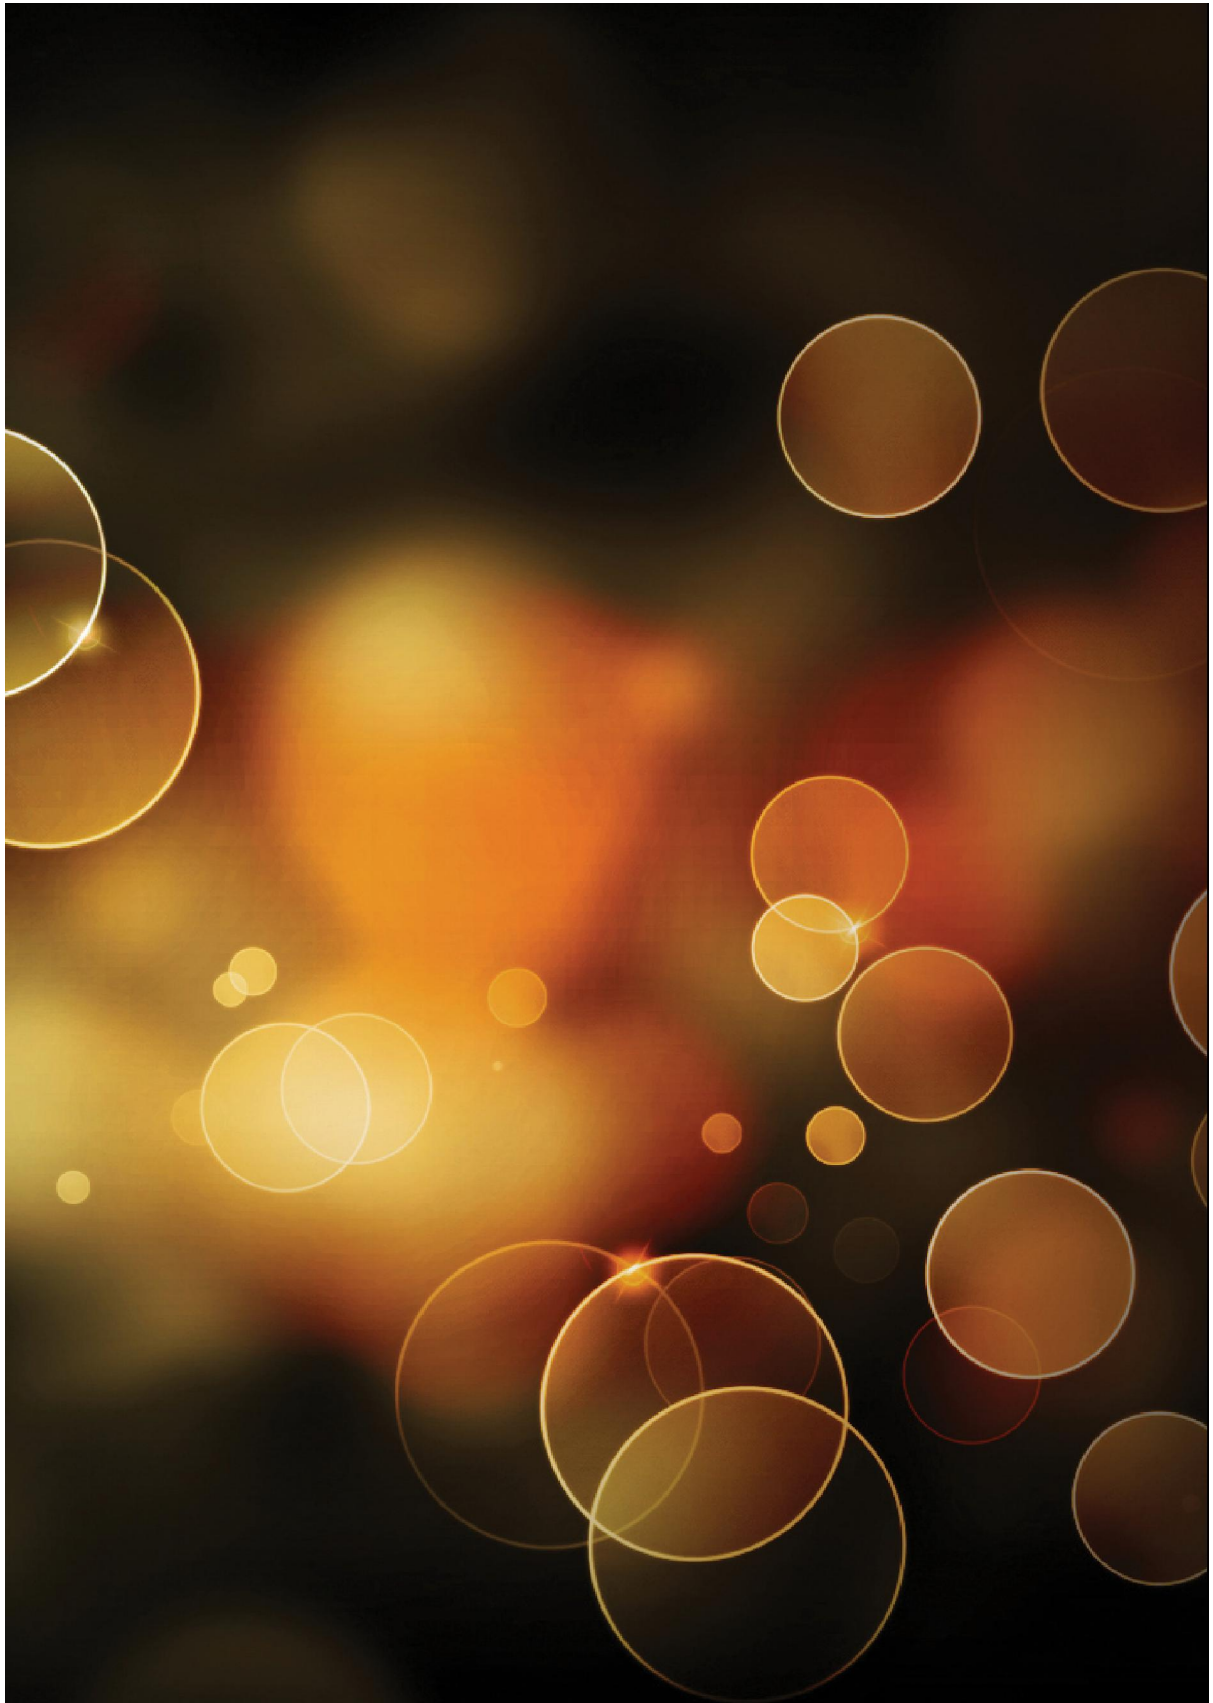



Intelligent System Easy Life

# 2300 - Series





# SK-DB2300<sub>SYS</sub>

## Intelligent Door bell system

Super – luxuriously appearance design, PC fire resistant and insulating material, attractive and durable. Metal frame with optional finish of color, noble and gentle. Particular luminescent backlight control keys ensure the customer to operate clearly and easily in any light environment. Luminous LED indicator complies with trend and can identify easily at night. Suitable for guestroom automation system, guestroom; data management system, to facilitate the guestroom management. Particular sounding master part spreads melody "Ding Dong".

HOTEL DOORBELL SYSTEM Force electricity.

### SK – DB2300SYS

- SK – DB2300SYS doorbell system touch panel is featured by innovative design, convenient and simple operation.
- Mechanical sounding master part spreads melody "Ding Dong"
- With MCU programmable circuit control and 1gang for bell button, 1 gang for "Don't disturb" another for "make up", it works reliable and stable.
- Intelligent instruction for each other (indoor and outdoor touch panel) embodies personalized design at one's pleasure. Easy installation and fit for standard BS4662 wall box.

Operating temperature range	- 10 C – 50 C
Operating humidity range	0 % - 95 %
Operating voltage	85- 245 VAC
Operating frequency	50 Hz/ 60 Hz
Mounting	60.3 mm ( fit for BS4662 switch box)
Dimension of product	86 mm * 86 mm * 25 mm
Distance of network connection	< 100 m

Chime bell dimension 155mm\*105mm\*45mm



SK-DB2300sys-2



SK-DB2300sys-1



SK-DB2300M



# SK-DB2301SYS

## Intelligent Door bell system

### SK - DB 2301SYS

- \* Guest can start or cancel service message, any instruction message at their will.
- \* Touch the button on indoor panel SK - DB 2301TI, the corresponding indicator on the outdoor touch panel (SK - DB 2301TO) will be lighted. When the "Do not disturb" indicator is lighted, the "Bell" button cannot be used.
- \* As for SK - DB2301SYS with 5 minutes times delay function, the basic function is similar with SK - DB2300SYS.
- \* The difference is that when the guest is inconvenient to meet the visitor, the "please wait" switch " can be pushed indoor, then the corresponding indicator on outdoor
- \* SK - DB2301TO will be lighted. The bell button is inapplicable right now. Five minutes later, "please wait" indicator will turn to be backlight automatically and the bell recovers the function.

#### Specification

Operating temperature range	- 10 C - 50 C	Operating humidity range	0 % - 95 %
Operating voltage	85- 245 VAC	Operating frequency	50 Hz/ 60 Hz
Mounting	60.3 mm ( fit for BS4662 switch box)	Dimension of product	86 mm * 86 mm * 25 mm
Connect wise	Force power	Chime bell dimension	155mm*105mm*45mm

### SK - DB 2300S

- \* Guest can start or cancel service message, any instruction message at their will.
- \* Touch the button on indoor panel SK - DB 2300S3/S4, the corresponding indicator on the outdoor touch panel (SK - DB 2300SIN2/3) will be lighted. When the "Do not disturb" indicator is lighted, the "Bell" button cannot be used.
- \* The difference is that when the guest is inconvenient to meet the visitor, the "please wait" switch " can be pushed indoor, then the corresponding indicator on outdoor SK - DB2301TO will be lighted. The bell button is inapplicable right now. Five minutes later, "please wait" indicator will turn to be backlight automatically and the bell recovers the function.

#### Specification

Operating temperature range	- 10 C - 50 C
Operating humidity range	0 % - 95 %
Operating voltage	85- 245 VAC
Operating frequency	50 Hz/ 60 Hz
Mounting	60.3 mm ( fit for BS4662 switch box)
Dimension of product	86 mm X86 mmX25 mm
Distance of network connection	<100m





SK-DB2301sys-1  
Hotel doorbell touch panel  
Out door



SK-DB2301SYS-2  
Hotel doorbell touch panel  
Indoor



SK-PW2300  
Push Button  
In door



SK-DB2300S3  
Hotel doorbell touch panel  
Out door



SK-DB2300SIN2  
Hotel doorbell touch panel  
Indoor



SK-DB2300S4  
Hotel doorbell touch panel  
Out door



SK-DB2300SIN3  
Hotel doorbell touch panel  
Indoor



# SK-ES2300

## Intelligent Energy Saver

### SK-ES2000

- SK-ES2000 series intelligent hotel card key switch is designed for specific card recognition
- Use the same card to unlock door and get power
- More efficiency than normal mechanical master switch because SK-ES2000 card key switch ensure the electrical facilities will be turned off the left of guest from a room
- Super-luxurious appearance design, with PC fire resistant, insulating material
- Design of luminous LED indicator can be easily identified at night
- Save power consumption 20%~30%

Load type	Power supplying for hotel guest room			
Rated operating current	16A	16A	16A	16A
Operating voltage	90-130V 60Hz	90-130V 60Hz 190-240V 50Hz	90-130V 60Hz 190-240V 50Hz	90-130V 60Hz 190-240V 50Hz
Functional Description	Insert any card for power, 15 second delay	Insert T5557 for power, 15 second delay	Insert S50 for power, 15 second delay	Insert magnetic card for power, 15 second delay

MCU Processor	24MHz/64k MCU
Operating voltage	AC50HZ 190-240V / AC60HZ90-130V
Current loading	Control output 16A
Dissipation power	<0.2W
Service life	More than 100 thousand times for use while full load under 220V
Operating temperature	-10-60°C
Operating humidity	AI 50° C 10-95%RH
Environment	Transport and store temperature range : 20°C to 80°C
Installation	Install to the standard BS4662 switch box witch screw and support bracket
Dimension	W86mm X H86mm X D42mm
Egress time delay	15 seconds
Warranty period	2 years



SK-ES2300RF



SK-ES2300M1



SK-ES2300N



SK-ES2300MN





# SK-T2300

## Intelligent Touch Panel

Luxury design, PC insulated material and all metal material, different color choices; LED back light make it trendy and easy to identify the key in dark; Infrared remote control; suitable for decoration of home, office and star hotel.

### PRODUCTS

- Touch Screen control
- Infrared Remote control
- Different Colors to Choose
- Product Character
- Infrared Remote Control
- LED back light touch key control, trendy and visible in dark.
- Modern design and easy operation
- Luxury appearance design, PC insulated material and all metal material
- Suitable for design and decoration of home, office and star hotel

### Dimmer Touch Panel

Dimming system gives you convenient, one-touch control of your home lighting.  
When you're furnishing a room, you have to take this lights placement and setting into consideration.  
Lights level in a room can give you different atmosphere in certain occasion as well as totally achieve energy saving.



A4 Switch



SK-T2300L1




SK-T2300L3



SK-T2300L3 - M



SK-T2300L2



SK-T2300L4



SK-T2300L4 - M





# SK-AC2300

## Electronic Room Thermostat

Its luminescent LCD screen can indicate indoor temperature, the digits stand for room temperature and user's setting temperature, wind speed and time. With legend, language indication, luminescent LCD screen and LED blue luminescent button indicator, it is convenient to operate clearly in any environment, even it is dark. Increase comfort, you can set different temperatures for the morning, day time, evening and over night.

### Products

SPEEDKEY thermostat monitors the temperature of the air within one room and turns the heating on and off in order to maintain the temperature you've set. The ideal temperature to set your room thermostat is between 16 c to 32 c. 23 c is recommended if you are sitting still for long periods of time. Its intelligent circuit control has 3 steps of wind speed control, there are 3 optional modes which is cooling mode, heating mode and automatic mode can be set by infrared remote. SPEEDKEY thermostat can replace traditional mechanical air conditioning temperature controller and it can effectively save more than 30% energy.

SK-AC2300 Electric room thermostat is ideal for that place installed double pipe or four central air-condition such as hotel, motels, office building and house.

Function Comparison for Models	SK-AC2300T	SK-AC2300T-4P	SK-AC2300I	SK-AC23000I-AP
LCD	✓	✓	✓	✓
Touch Screen	✓	✓	✓	✓
Remote control	✓	✓	✓	✓
Time Display	✓	✓	✓	✓
Timing on/off	✓	✓	✓	✓
key lock	✓	✓	✓	✓
Large LCD	✓	✓	✓	✓
Energy Saving Mode	✓	✓	✓	✓
Fan Mode	✓	✓	✓	✓
Auto Fan Speed	✓	✓	✓	✓
4-Pipe	✓	✓	✓	✓
Temperature Correction	✓	✓	✓	✓
Default Setting for turn on	✓	✓	✓	✓
Cooling Mode	✓	✓	✓	✓
Heating mode	✓	✓	✓	✓
Auto mode	✓	✓	✓	✓
Function Comparison for models	SK-AC2300L8	SK-AC2300L8-4P	SK-AC1300	SK-AC1300-4P
LCD	✓	✓	✓	✓
Touch Screen	✓	✓	✓	✓
Remote control	✓	✓	✓	✓
Time Display	✓	✓	✓	✓
Timing on/off	✓	✓	✓	✓
key lock	✓	✓	✓	✓
Large LCD	✓	✓	✓	✓
Energy Saving Mode	✓	✓	✓	✓
Fan Mode	✓	✓	✓	✓
Auto Fan Speed	✓	✓	✓	✓
4-Pipe	✓	✓	✓	✓
Temperature Correction	✓	✓	✓	✓
Default Setting for turn on	✓	✓	✓	✓
Cooling Mode	✓	✓	✓	✓
Heating mode	✓	✓	✓	✓
Auto mode	✓	✓	✓	✓





SK-AC2300T



SK-AC2300I-4P



SK-AC2300L8



SK-AC1300



SK-AC1300-4P



SK-AC2300L8-4P



# SK-HV2300

## Electronic Room Thermostat Controller For Heating System

SK-HV2000 Electronic thermostat is feature with unique design and simple operation. Super-luxurious appearance, LED backlight touch type button design, LCD display indoor temperature, time, day, mode and running period, applied to electrical heating equipment control and systemic heating electrical valve control. SK-HV2000 Electronic room thermostat is ideal for that place installed electric heating or water heating system such as hotel, motels, boarding house office building and house. 4 types of mode: Manuel Mode, Auto Mode, Energy Saving Mode, Holyday Mode. Auto mode for 7 days 24 hours on/off control, 6heat-supply periods of time control per day. Super-luxuriously designed and made of ABS fire resistant, insulating metal materials. Startup optimizing control.

### Products

#### Application:

- Temperature control for below rooms:
- Office building, reference room or business places
- Electromagnetism valve of water heater
- Forced ventilator of gas or oil burners
- storage water heater
- Heating equipment
- Apartments, holiday house
- Can control below equipments:
- Electromagnetism vale of boiler
- Cycle pump and zone valves in heating system or Electrical
- Thermal actuator

#### SK-HV2300

- On/off control
- Each heat-supply time period an control one temperature accordingly
- Sensor correction and reset function
- Minimum limitation for setup point
- Energy saving mode
- Auto on/off program for 7 days \*24 hours .Maximum 6 heat-supply period per days
- Manual control mode.
- Anti-freezing and high temperature protection
- Holiday mode.
- Primary heat-supply period startup optimizing control.

#### Function Comparison for models

LCD  
Touch Screen  
Timing On/Off  
Time And Week Day Display  
Key Lock  
Large Lcd  
Auto Mode  
Holiday Mode  
7X6 Program  
Startup Optimizing Control  
Over Heating Protection  
Anti-Freezing Protection  
Energy Saving Mode  
Temperature Correction

SK-HV2300

SK-HV2300L8

SK-HV1300



HV2300L8



SK-HV1300



SK-HV2300B



SK-HV2300L8B



SK-HV2300T





# SK-AP2300

## Acoustics System

There are large power double track stereo voice amplifier an FM digital radio tuner inside. Three ways circuits input can be set to be high-resistance input and low-resistance input, so as to meet long distance high voltage transmission input and low electronic signal input. FM radio receipt system can get the current message and information, as well as gentle timbre, clear melody temperature to be constant temperature.

SK-AP2000 intelligent acoustic system is ideal for market broadcast system, Hotel music broadcast system, internet café music broadcast system, Villa and house background music system, meeting room public-address system and so on.

### Product

#### Application:

Super-luxurious appearance design and made of PC fire resistant, insulating metal materials.  
 There are optional finish color to meet different decoration of house, office building and star hotel.  
 Blue luminescent touch-type design to control which meet the fashionable trend.  
 FM stereo self-auto search channel and large channel storage, can store 40 channels  
 Infrared Remote control  
 Voltage AC 60/50Hz-100V240V  
 Large power output, strong driving capability  
 Output power is 25W\*2  
 Perfect protection system which has over-heat protection, over-current protection and short circuit protection  
 It can be regulated to meet different timbre requirement

#### Specification

Input signal	2VRMS sound signal or 100V broadcast power amplifier
Operate Voltage	AC50/60Hz 100V240V
Frequency feedback	20Hz-20 KHz
Fm channel range	87 MHz-108MHz
Operate humiditi	at 50 100%
output power	25*2(RMS)
output impedance	4-8
Operate condition	Transport and store temperature
Range	-20°C- 80°C
High pitch regulation	+-12DB
Operate temperature range	0-50
Bass regulation	+-12BD
THD	<0.05%
S/N	>80DB



SK-AP2300



SK-AP2300IP



SK-AP2300VH



SK-AP2300VL



# Outline Border


Innovative design; Super-luxurious appearance. Made of ABS fire resistant, insulating and overall metal materials; suitable for decorative design in homes, offices, buildings, and star hotels



Solid Color Silver  
Outline Border



King Kong Gray  
Outline Border



Champagne Gold  
Outline Border





Grainy Brown  
Outline Border



Speed blue  
Outline Border




Pink  
Outline Border



Rosy  
Outline Border



Piano Black  
Outline Border



Ivory White  
Outline Border



# Intelligent Remote

Modern design, easy operation Multi-functional remote controller,  
easy to set corresponding with light control switches



Facility-Remote  
2300 series Remote



SK-Handy-Remote  
Integration Remote




SK-IR-AC-Remote  
electronic room thermostat Remote



# Intelligent energy saver card



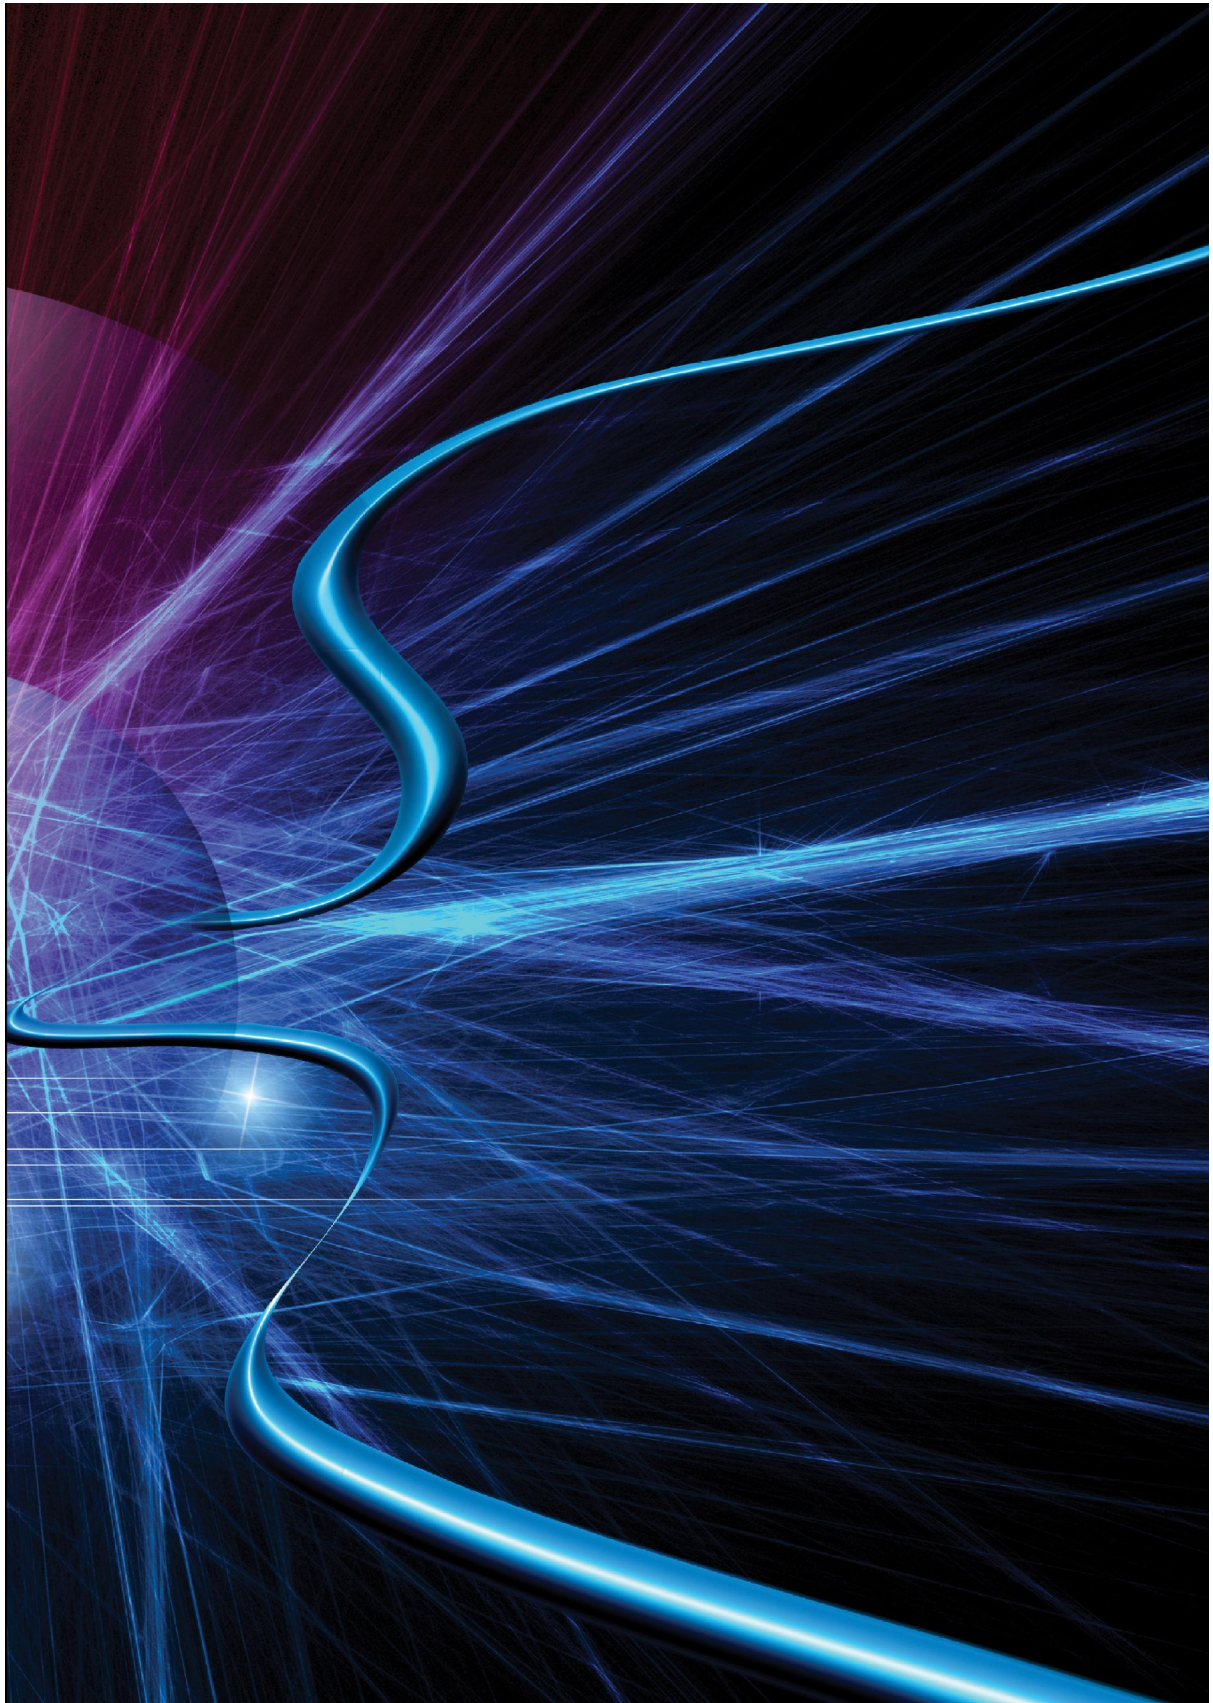

RA8 NB4 Jebel Ali Free Zone, P.O. Box 18480 Dubai - UAE  
Tel: +971 4 883 3774, Mob: +971 55 5501557, Fax: +971 4 883 3775  
E-mail: [digital@technomix.com](mailto:digital@technomix.com), [www.digitaltouches.ae](http://www.digitaltouches.ae)