
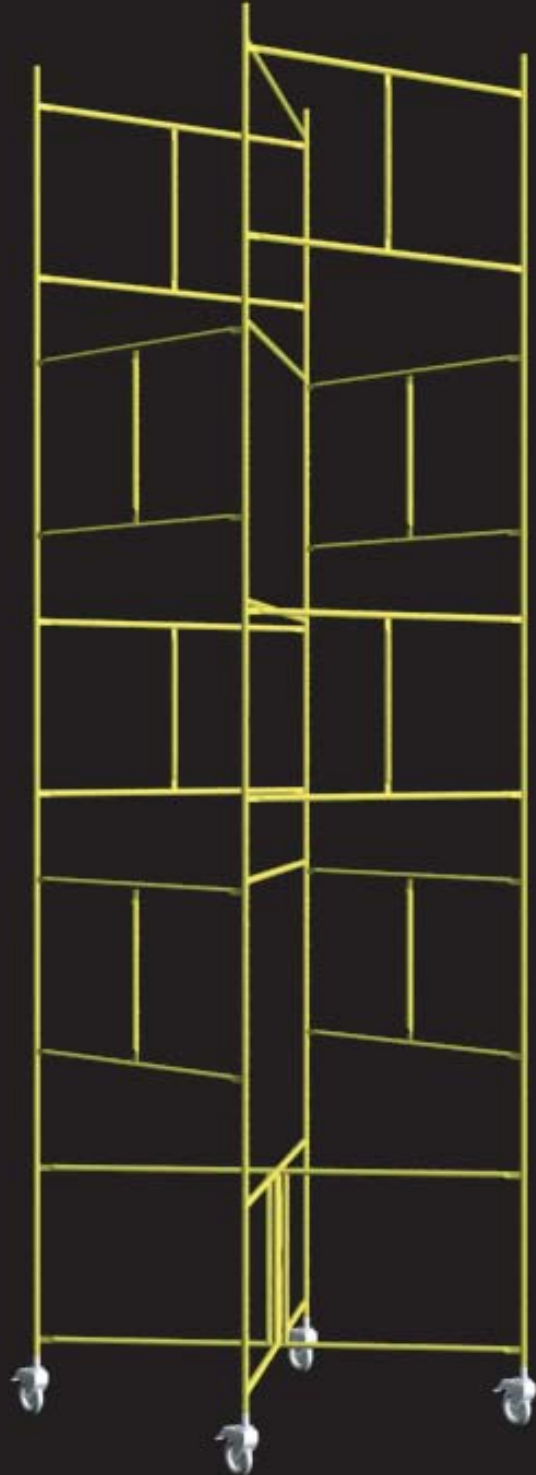
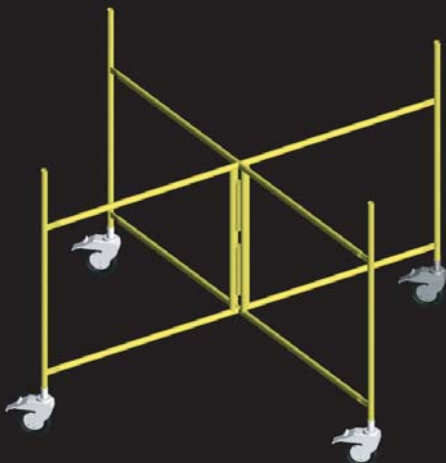


3. LIGHT WEIGHT MOBILE TOWERS

Made of steel tubes with a load bearing capacity of 500 kg which includes the personnel & material weight. Combination of the base frame (2.0m X 2.0m) with castor wheels along with the standard frame (2.0m X 1.0m) make up the Mobile tower.

The standard frame allows two platform locations @ 0.5m intervals.

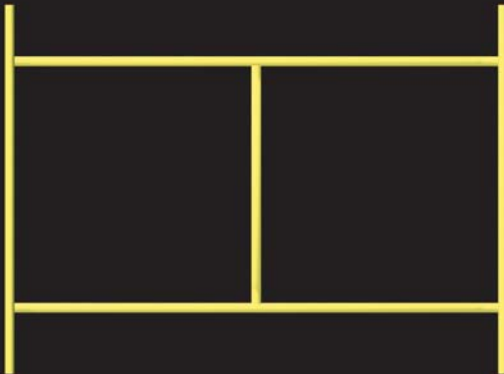

Caution is advised as follows:

- The castor wheel must always be locked for movement.
- Guard post & rail are fixed at all times when the system is in use.
- The platform boards must have built in end hooks.
- Never move the system with material / personnel.