


4. ADS HEAVY DUTY MOBILE TOWER

Standard System (ADLock / ADS QUIK STAGE) accessories used in combination with Outriggers build the Heavy Duty Mobile Tower.

Some of the salient features are:

- Hassle-free erection & dismantling.
- Economic, space saving storage.
- Platform height range of 4m to 12m.
- Variable bay / base sizes to meet specific requirement.
- A safe working height of 10m for external use and 12m for internal can be achieved.

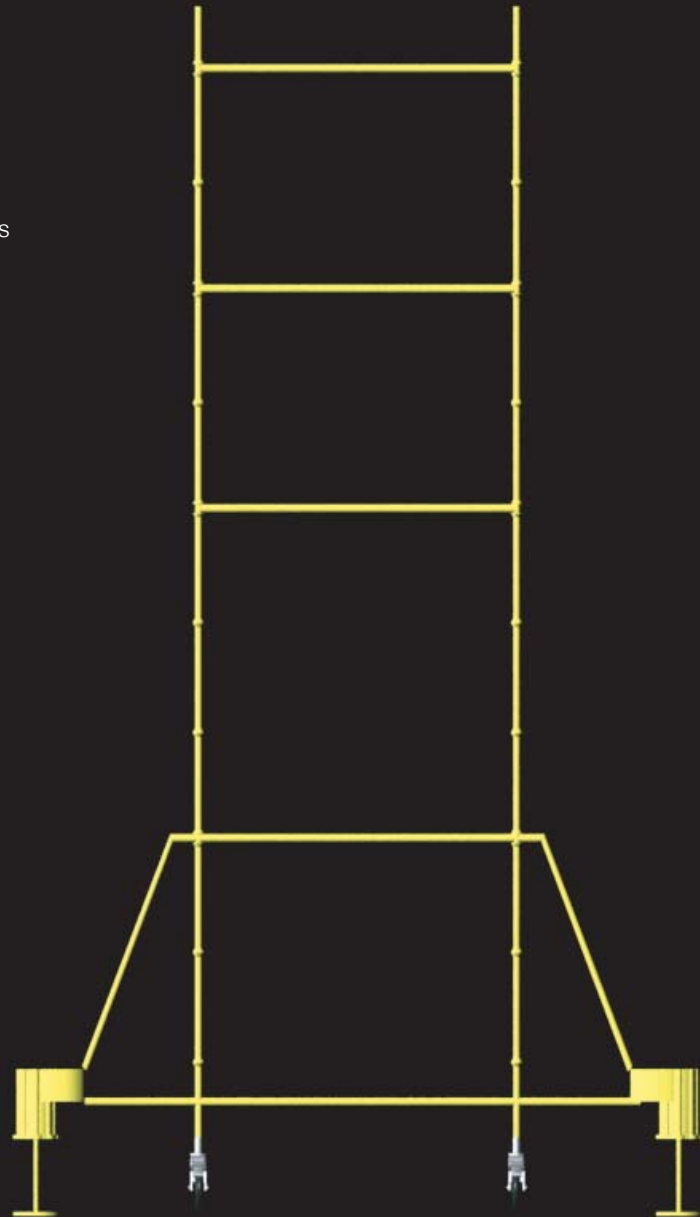

5. ADS PROPS

Built, conforming to British Standard BS 4074 : 1982 and tested to BS 5507 Part 3 : 1982, of high grade steel, these Props can be used for a multitude of purposes where an adjustable Load bearing element is required.

Coarse adjustments are possible utilising the heavy duty pin through the slot in the outer tube and the holes (@ regular intervals) in the inner tube. Finer adjustments are achieved through the rolled thread on the cast iron collar.

