


Knauf
Waterproof Sealing Tape
Elastic sealing tape

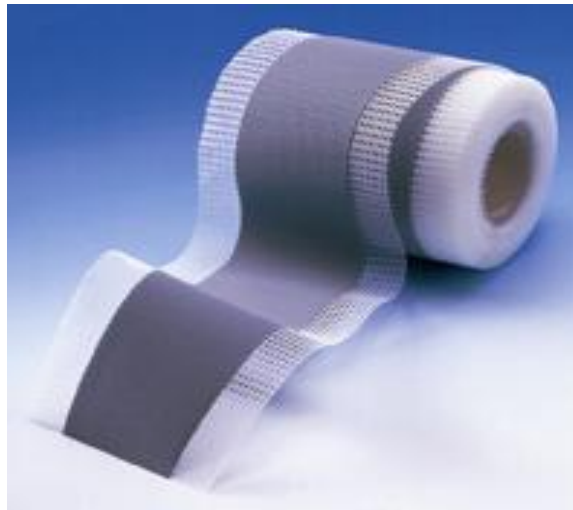

- Fields of application:**
- m For **watertight** and **flexible** sealing of corner and connection joints
 - m For application on moisture sensitive substrates
 - m For application in residential or light commercial showers and bath rooms as well as other rooms with similar moisture treatment
 - m Also suitable for terraces and balconies
- Properties:**
- m **Mash-reinforced, elastic sealing tape**
 - m **High resilient** and **compatible** to **silicone**
 - m **Prevents** moisture from above
 - m With a thickness of 0,6 mm **for a seamless and safety reinforcement**
 - m **For creating a waterproof system** in connection with Knauf *Waterproofing* / Knauf *Flex Dicht*

Technical data:

Application data

<i>Color:</i>	grey
<i>Thickness:</i>	approx. 0,6 mm
<i>Water vapor diffusion resistance μ:</i>	1500
<i>Equivalent air film density sd:</i>	0,9 m
<i>Extension:</i>	57 %
<i>Tensile strength:</i>	7,6 N /mm ²
<i>Temperature resistance after drying:</i>	-20°C to +70°C

Material data

<i>Material basis:</i>	Acrylate dispersion with a duplex overlaying mash tape
<i>Shelf life:</i>	unlimited
<i>Storage conditions</i>	Cool and free of frost
<i>Delivery form:</i>	5 kg PE-bucket

Ident.-Nummer / EAN-Code

5356 / 4 006379 013551 9

Material safety data in accordance with GefStoffV (catalogue of hazardous materials)

No dangerous contents, no labeling required for product

Substrate: Preparation of the substrate depends on the properties of substrate and the waterproofing system you wish
 Apply an adequate primer
 Wait with following working processes until the primer has completely dried

Application: Apply Knauf *Waterproofing*
 Peel off the protection film and push Knauf *Waterproof Sealing Tape* on the wet sealant
 Make sure to achieve an overlapping of sealing tapes at least 5 cm
 Smooth unevenness and loop formings with a smoothing trowel
 Afterwards apply 2 or 3 coatings on the sealing tape (apply the material completely with the sealing tape)

Further information:

- m Knauf *Waterproof Sealing Tape* is compatible to silicone. Materials (silicone, Knauf *Waterproofing*) can not extrude the sealing tape
- m Solvent-free adhesives and coatings can be applied directly on the sealing tape
- m Test material compatibility before

Notes:

Knauf Bauprodukte GmbH Postfach 10 D-97343 Iphofen	Knauf-Beratungszentrale: Technical advice: Internet: Email:	0180 / 5 31-9000 (0,12 €/min) www.knauf-bauprodukte.de info@knauf-bauprodukte.de
---	---	---

The content of this technical data sheet corresponds to our knowledge at time of printing. Technical data sheets are actualized regularly. The relevant version is available on our web page or by calling our Technical Service Department. Knauf Bauprodukte does not authorize anyone, including Knauf Bauprodukte Representatives, to make any statements which supersede, modify or supplement the information provided on is printed literature or package labels without written confirmation from Knauf Bauprodukte Technical Service Department. Knauf Bauprodukte makes no warranty of merchantability or suitability of its products for any particular purpose. All product demonstrations are placed for illustrative purposes only and do not constitute a warranty of any kind. KNAUF BAUPRODUKTE SELLS ITS PRODUCTS UPON THE CONDITION THAT CUSTOMERS SHALL CONDUCT THEIR OWN TESTS TO DETERMINE THE SUITABILITY OF THE PRODUCTS FOR THE CUSTOMERS' INTENDED PURPOSES. Under no circumstances Knauf Bauprodukte will be liable for economic, special, incidental or consequential damages or losses of any kind whatsoever arising out of or occasioned by the selection, use, installation or replacement of these products.

With this technical data sheet every prior data sheet is void.

Iphofen, May 2008