



Eyeleds® ColorEYE® CS




Features & Benefits:

- Dynamic floor lighting based on RGB LED colour changing technology;
- Easy on/off switch controlled colour freeze and colour change modes;
- Easy to install with many siting applications due to built-in depth of just 6,5mm;
- Top quality SMD LED light source with extremely long lifespan up to 100.000h;
- Energy efficient (.42W per light unit) and dust/water resistant (IP67);
- Available in both linkable ("multi-connector") and chain systems.

Materials & Dimensions:

- A: Light Surface: Polycarbonate lens 850°C – ø 21,5mm.
 B: Decoration Ring: Brushed Stainless Steel (1.4301/V2A/Inox 304) – ø 37,4mm.
 C: Trim Ring: Brushed Stainless Steel (1.4301/V2A/Inox 304) – ø 45mm.
 D: Clamp Ring: Stainless Steel (Galvanised) – 57,5mm.



System Components:

Multi Connector

1L - 680.320.0U.222.09

Chain System

3L - 634.320.0U.222.09 8L - 636.320.0U.222.09
 5L - 635.320.0U.222.09 20L - 758.320.0U.222.09

Power Supply Max. 22x CS LED
 Recess with In: 220-240V~/50Hz
 'zero voltage plus'

AZ780001U

T-Splitter

AZ180001U

Extension Cable

AZ150001U



IP67 End Stop

324.031.0U.001.02


Replacement Kit

1L - 393.320.0U.222.09

Connection Diagram:

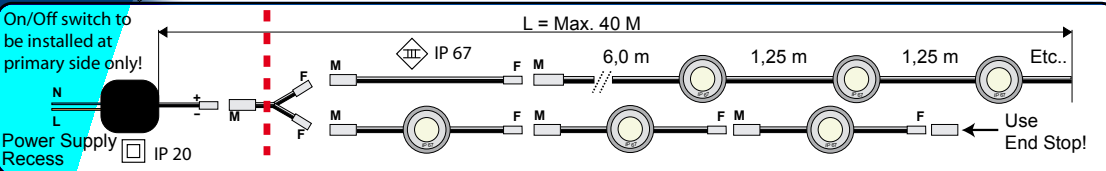

Bathroom Zones:

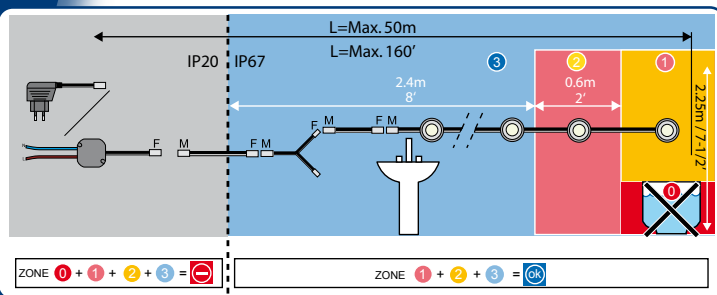

Control Features:

Program 1: Colour Changing Mode

ON

10 min.

LED 1 LED 2 LED 3 LED 4 etc.

Program 2: Colour Fixation Mode / Resume Colour Changing Mode

OFF

< 2 sec.

ON

LED 1 LED 2 LED 3 LED 4 etc.

Reset the System

ON NOT OKÉ OFF

LED 1 LED 2 LED 3 LED 4 etc.

6 sec.

< 4 sec.

OFF

> 6 sec.

ON

