



Eyeleds® ColorEYE® Pro




Features & Benefits:

- Dynamic floor lighting based on RGB LED colour changing technology;
- Sequencer controlled colour setting, colour changing and colour programming;
- Easy to install with many siteing applications due to built-in depth of just 6,5mm;
- Top quality SMD LED light source with an extreme long lifespan up to 100.000h;
- Energy efficient (0.8W per light unit) and dust/water resistant (IP67);
- Configured as linkable ("multi-connector") system.

Materials & Dimensions:

- A: Light Surface: Polycarbonate lens 850°C – ø 21,5mm.
 B: Decoration Ring: Brushed Stainless Steel (1.4301/V2A/Inox 304) – ø 37,4mm.
 C: Trim Ring: Brushed Stainless Steel (1.4301/V2A/Inox 304) – ø 45mm.
 D: Clamp Ring: Stainless Steel (Galvanised) – 57,5mm.

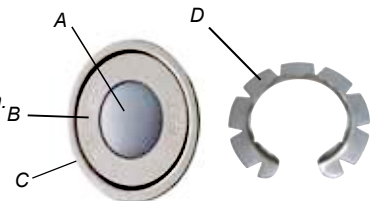

System Components:

1L Multi Connector 491.313.0U.222.09	Sequencer AZ461011Z	Power Supply 28V max. 18x Pro LED AZ441021Z	T-Splitter A AZ411021Z	T-Splitter M AZ421021Z	Extension Cable IP20 AZ371021Z 1m AZ391021Z 5m
Converter Cable IP20 → IP67 incl. IP67 End Stop* 324.020.1Z.006.02	Converter Cable IP67 → IP20 324.021.1Z.006.02	Extension Cable IP67 324.022.1Z.006.02 1m 324.023.1Z.006.02 5m	Replacement Kit 393.313.0U.222.09	Repeater 2-way AZ641021Z	Repeater 5-way AZ651021Z

Connection & Build-in Diagram:

