



Eyeleds® PowerEYE® 'Warm White'



Features & Benefits:


- Top quality Luxeon K2 Power LED light source with a warm, powerful light output;
- Wide applicability (due to a build-in dept of just 6,5mm) and minimal heat development;
- Extreme long lifespan up to 50,000 hours;
- Easy and safe installation conform the strongest installation norms;
- Energy saving (1,5W only), dust proof and water resistant (IP67);
- Beam angle by use of modern lens technology (for Spotlight version 60°, for Downlight version 45°);
- Product available in an exclusive 'Multi Connector' version, easy to connect by means of "male-female" connectors.

Materials & Dimensions:















- A: Light surface: Polycarbonate lens 850°C resistant - Ø 21,7mm.
 B: Decoration ring: Brushed stainless steel (1.4301/V2A/Inox 304) - Ø 37,4mm.
 C: Mounting ring: Brushed stainless steel (1.4301/V2A/Inox 304) - Ø 45mm.
 D: Clamp ring: Brushed stainless steel - Ø 57,5mm

Fixture & Light Colours:


Brushed stainless steel/ 'Warm white' (3275 K / typical)

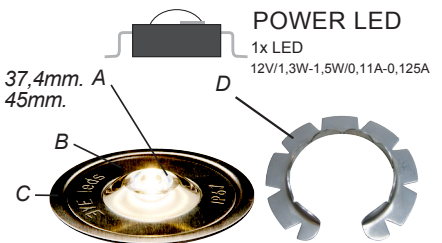


System Components:

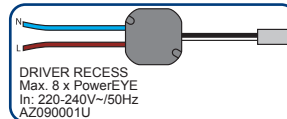


Installation:

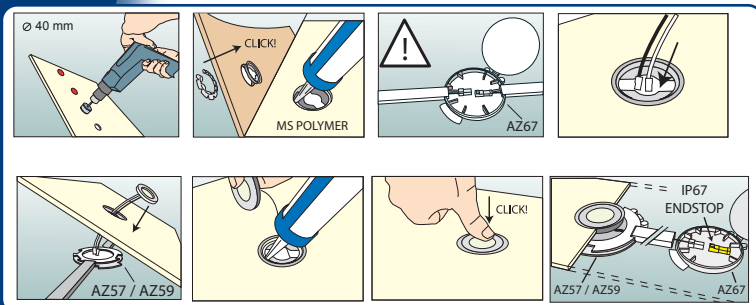

Build-In Diagram:

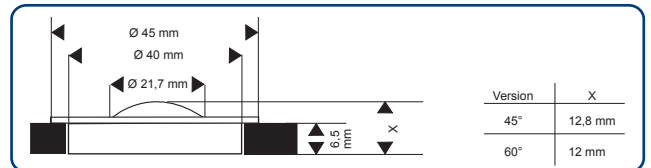

Bathroom Zones:

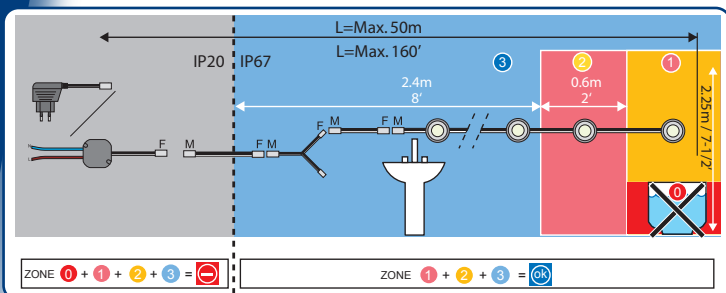

Light Output:

Product (Light source)	Efficiency (Lumen/Watt)	Output (Lumen)	Capacity (Watt)	Voltage (Volt)	Life span MTBF (Hours)
Eyeleds® "Classic" (Round) (SMD LED)	20	6	0,3	12V-DC	100.000
Eyeleds PowerEYE® ('Cool White')(Luxeon K2 LED)	40	60	1,5	12V-DC	50.000*
Eyeleds PowerEYE® ('Warm White')(Luxeon K2 LED)	35	52	1,5	12V-DC	50.000*
Conventional Power LED	25	25	1	12V-DC	50.000

* The industries best lumen maintenance - with 70% lumen maintenance after 50,000 hours of operation.

