

GAV 1060

Gate valve – DN 50-600



Gate valve for heating and cooling systems. Available in pressure class PN 16.

TA-SC

Distributed by TA Hydronics



Technical description

Applications:

Heating and cooling systems.

Function:

Shut-off

Dimensions:

DN 50-600

Pressure class:

PN 16

Temperature:

Max. working temperature: 120°C

Min. working temperature: -10°C

Material:

Body and bonnet: Ductile iron EN-GJS-500-7 (EN 1563)

Wedge: Ductile iron EN-GJS-500-7 (EN 1563)

Body and wedge trim: Bronze CuSn5Zn5Pb5 (EN 1982)

Stem: Stainless steel X20Cr13 +A (EN 10088-2, BS 970 ~420S37, AISI 420)

Stem nut: Bronze CuSn5Zn5Pb5 (EN 1982)

Gasket and packing: Graphite, non-asbestos

Handwheel: Ductile iron EN-GJS-500-7 (EN 1563)

Surface treatment:

Valve body: Two pack epoxy coating system, dark grey.

Handwheel: Two pack epoxy coating system, black.

Marking:

TA-SC, CE, PN and DN.


Valve standard:

According to BS 5150 (EN 1171) and MSS SP-70.

Flanges:

According to EN 1092-2.

Articles

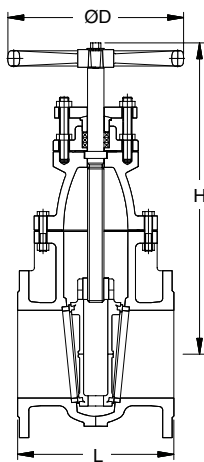

Article No	DN	D	L	H	No of bolt holes	Kg
77 106-050	50	178	178	327	4	22
77 106-065	65	178	191	322	4	24
77 106-080	80	190	203	340	8	28
77 106-090	100	250	229	420	8	48
77 106-091	125	300	254	477	8	68
77 106-092	150	300	267	542	8	82
77 106-093	200	356	292	668	12	135
77 106-094	250	400	330	750	12	213
77 106-095	300	457	356	835	12	314
77 106-096	350	508	381	1015	16	400
77 106-097	400	558	406	1120	16	610
77 106-098	450	610	432	1210	20	800
77 106-099	500	610	457	1250	20	980
77 106-001	600	762	508	1390	20	1320

The products, texts, photographs, graphics and diagrams in this brochure may be subject to alteration without prior notice or reasons being given.

For the most up to date information about our products and specifications, please visit www.tahydronics.com.

2-60-50 GAV 1060 03.2011