



- Quality
- Choice
- Safety
- Service





Garage Door





Advantages:

- Quick Delivery
- Quality & Reliability
- Guaranteed Spare
- Perfect Installations
- After-sale service



Low head room hardware

A cost-effective solution to meet all the requirements of a sectional overhead door for Garage and Industrial applications, whether it is aluminium or steel, manually or electrically operated, from the right source: Middle East Insulation LLC. Our doors are among the best in the world because we understand

A door system which is completely tailor-made to meet the correct specifications and requirements of the customer.

Durable, Quite, Safe and Economical.

- Panels are produced under ISO 9001-2000 quality procedure meeting all international standards.
- Technologically advanced hardware from world renowned Manufacturers EUROPE.
- Hi-tech operators with safety features from GERMANY.

Variety of BAAB Panels

your needs.

: 0.7mm or 0.5mm stucco embossed aluminium skins on both sides coated in with RAL 9010. Alsto

: 0.5mm or 0.7mm Aluminium Polyester coated in Off-White RAL 9002 on both sides. Alpo

Aristocrat: Stylish door with raised panel in wooden finish designed and developed for your desire. Plastel

: 0.5mm Steel Plastisole 200 microns PVC coated in white RAL 9010 on both sides excellent

corrosion and scratch resistance.

: 0.5mm steel polyster coated in white RAL 9002 on both sides. **Polystel**

Monostel: 0.7mm steel non-insulated single skin panel strong enough to withstand any resistance.


Technical Specifications		
Sl.No	Description	Details Details
1	Door size	Minimum 2250 X 1800 mm (WXH)
		Maximum 8000 x 5185 mm (WXH)
2	Panel height	530 mm
3	Panel Thickness	50 mm
4	Insulation	Injected polyurethane for excellent door tightness and monolithic sections.
5	Panel-double skin	Double skin insulated with Polyurethane.
6	Hardware	Nylon Rollers with adjustable roller brackets, powder coated / G.I torsion
		springs from Holland.
7	Sealing	Completely sealed with EPDM sealings for weather tightness on all sides and
		between the panels.
8	Operator	Hi-tech operator for Garage / Industrial doors with safety features,
		remote/push button control options.

HARDWARE

Premium product hardware imported from European hardware specialists.

Track system

The vertical and horizontal rigid industrial track is made of galvanized steel. The tracks are designed to suite any site condition (refer drawing).

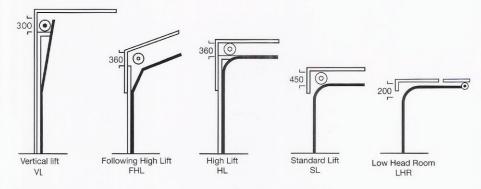



Torsion springs are made of shot peened galvanized spring wire in accordance to Din 17223. Consistent quality is guaranteed by applying powder coating electrostatically. This enameling process protects spring against corrosion and gives top quality. Springs are rated for 20,000 upto 100,000 operations.



Hinges are made of 2.5mm plated steel and heavy duty Nylon rollers of 46.5 mm outside diameter with high quality ball bearing.

Standard Fittings

- Spring bumper (stopper).
- Nylon black handle.
- Pull down rope.

Options

- Oval or rectangular windows.
- Security lock.
- Chain hoist.

Standard colours







Nylon Roller



Hinges

- Designed for residential and industrial applications
- Alluminium or Steel
- Plain or Perforated
- Powdercoated in standard RAL colours
- Manually or electrically operated
- European operators with advanced safety features

Features and Benefits

- Injected polyurethane insulated panels monolithically protected by steel or aluminium facing for better strength, durability, sound absorption and temperature stabilization.
- Heavy duty galvanized steel hardware to suit any site conditions.
- Rollers with high quality ball bearing, galvanized steel hinges for smooth operation.
- Provided handle, foot plate and chain hoist for easy manual operation.
- Quick and easy exchange of damaged panel helps to reduce service cost.
- Glazed option for better interior lighting and improved aesthetics.
 - *Standard colours are subject to availability and specifications can be changed without prior notice.

Jperators - German make



Garage Operators

- Advanced technology with all safety features.
- More silence, more comfort, more speed.
- Reliable in case of emergency.
- Soft start and soft stop facilities.
- Remote control and push button operations.
- Optimised lighting functions.

Industrial Operators

- Designed for easy installation.
- Security and reliability.
- Emergency Hand chain for manual operation.
- Electronic travel cut-out.
- Equipped with Photo-cell or Opto-sensor safety devise.



Other products - European Make

Speed Roller Door

Dock Leveller

Dock Shelter

Overhead Door with Glass Panel









We also offer Aircraft hanger door, Road barrier, Swing and Sliding gate operators

SERVICE - 050 - 5518356



A Quality Product from:



الشرق الأوسط للعوازل ذمم. Middle East Insulation և և



P.O.Box: 14225, Dubai, United Arab Emirates, Tel: +971 4 880 1600, Fax: +971 4 880 1700, E-Mail: baab@mei-uae.com, Web: www.mei-uae.com