



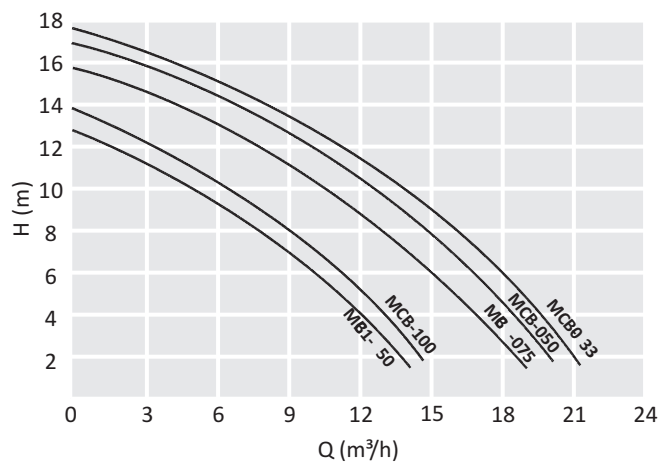

SELF PRIMING PUMP "MCB"




- Very high hydraulic efficiency.
- Big incorporated detachable pre filter basket.
- Transparent lid to bolt on.
- Totally covered balanced 316-L stainless steel shaft.
- Resin motor IP 55 - Class F.
- Single-phase pump with plug and thermal protector.
- Anti-explosion capacitor P2.
- 100% 304-L stainless steel bolts and screws.
- Resistant to salt treatment and sea water.
- Single-phase with thermal protector.
- Two years warranty.

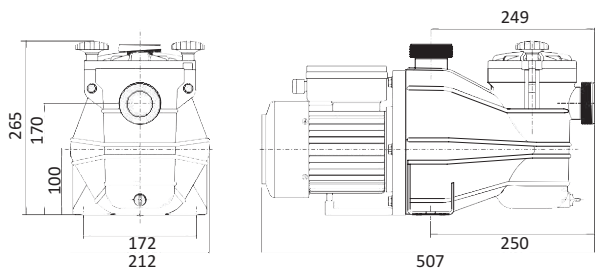

CODE	POWER		INTENSITY	TENSION	MEC	UNIONS	PACKING	WEIGHT	VOLUME
	HP	kW							
MCB-033M MCB-033T	0.33	0.24	2.7	230	71	Ø 50mm	1	12.4	0.035
MCB-050M MCB-050T	0.50	0.37	2.9	230	71	Ø 50mm	1	12.9	0.035
MCB-075M MCB-075T	0.75	0.55	3.8	230	71	Ø 50mm	1	13.3	0.035
MCB-100M MCB-100T	1.00	0.74	4.4	230	71	Ø 50mm	1	13.7	0.035
MCB-150M MCB-150T	1.50	1.10	4.6	230	71	Ø 50mm	1	14.0	0.035

SELF PRIMING PUMP "MJB"

- Supplied with unions: 50 mm or 63 mm, thread 2"3/4 : suction and discharge.
- Ultra-silent pump.
- 100% 304-L stainless steel screws.
- Totally covered balanced 316-L stainless steel shaft
- Double sealing bearing.
- Body in resistant composite materials.
- Resin motor IP 55 - Class F.
- Anti-explosion P2 capacitor.
- Resistant to salt treatment and sea water.
- Single-phase with thermal protector.
- Two years warranty.

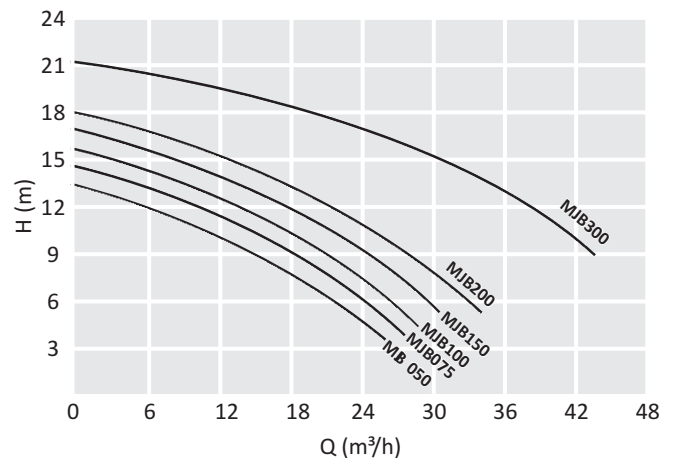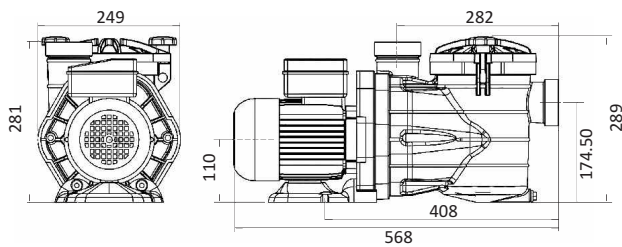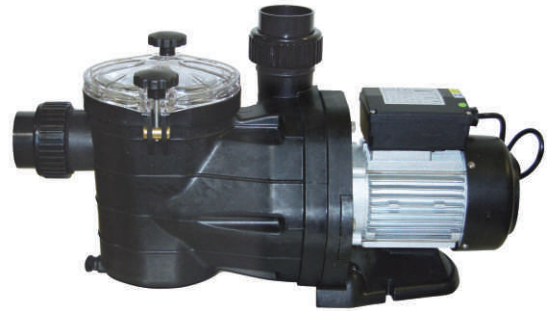

CODE	POWER		INTENSITY	TENSION	MEC	UNIONS	PACKING	WEIGHT	VOLUME
	HP	kW							
MJB-050M	0.50	0.37	4.3	230	71	Ø 50mm	1	15	0.050
MJB-050T			3.5/2	230/400					
MJB-075M	0.75	0.55	4.5	230	71	Ø 50mm	1	15	0.050
MJB-075T			3.5/2	230/400					
MJB-100M	1.00	0.74	5	230	71	Ø 50mm	1	16	0.050
MJB-100T			3.7/2.1	230/400					
MJB-150M	1.50	1.10	6	230	71	Ø 63mm	1	16	0.051
MJB-150T			4.4/2.5	230/400					
MJB-200M	2.00	1.46	6.3	230	80	Ø 63mm	1	18	0.051
MJB-200T			5.2/3	230/400					
MJB-300M	3.00	2.19	11	230	80	Ø 63mm	1	20	0.054
MJB-300T			7.3/4.2	230/400					