# DEWALT

# 1.0 AH

# 7.2V DCF680G2 Battery Capacity 1 Ah Voltage 7.2 V Max Torque 4 Nm No Load Speed 0 - 430 rpm Tool Holder 6.35 mm Weight 0.5 kg Length x Height 165 / 245 x 135 / 55 mm





Electrical Fitments on Wood



Pipe Fittings



Electrical / Electronic
Appliances Maintenance



Switch Installation MEP

### **HOW LONG DOES IT TAKE TO CHARGE THE BATTERIES?**









5.0

	DCB 145/	DCB143/	DCB142/	DCB144/
	DCB185	DCB183	DCB182	DCB184
DCB105	25 Minutes	40 Minutes	70 Minutes	90 Minutes
DCB119	40 Minutes	60 Minutes	120 Minutes	150 Minutes

# **DEWALT Industrial Tools**MIDDLE EAST & AFRICA HEADQUARTERS

P.O. Box: 17164, Jebel Ali, Dubai, U.A.E. Tel: +971 4 8863030, Fax: +971 4 8863333 Email: dewalt.marketing@sbdinc.com

# www.DEWALT.ae

The yellow and black colour scheme is used on DeWALT Power Tools and Accessories as a trademark. DeWALT reserves the right to change any deal at any time without notice. Deals available while stocks last.

Be the first to see product news and special offers from DEWALT... Register at MYDEWALT simply go to www.DEWALT.ae/MYDEWALT

Your DEWALT Dealer:





Cordless 3.indd BC1-FC2 5/12/15 5:32 PM



# XR LI-ION COMPACT DRILL DRIVER

12V Max DCD710D2



### 12V Max DCD710C2/D2

Battery Capacity	1.3 Ah /2.0 Ah
Power Output	180 Watt
No Load Speed	0-400/1500 rpm
Chuck Capacity	1.5-10 mm
Max Torque	24 Nm
Max. Drilling Capacity [Wood	d] 19 mm
Max. Drilling Capacity [Meta	l] 10 mm
Weight	1.1 kg
Length x Height	185 x 195 mm

XR LI-ION COMPACT DRILL DRIVER

14.4V DCD734C2



XR LI-ION COMPACT HAMMER DRILL DRIVER 18V DCD776C2





14.4V	DCD734C2	


ITITI DEDICATE	
Battery Capacity	1.3 Ah
Power Output	250 Watt
No Load Speed 0	-400/1500 rpm
Chuck Capacity	1-13 mm
Max Torque	38 Nm
Max. Drilling Capacity [Wood	] 30 mm
Max. Drilling Capacity [Metal	10 mm
Weight	1.57 kg
Length x Height	215 x 191 mm

18V DCD771C2	
Battery Capacity	1.3 Ah
Max Torque (Hard)	42 Nm
Max Torque (Soft)	24 Nm
Power Output	300 Watt
No Load Speed	0-400/1500 rpm
Chuck Capacity	1.5-13 mm
Max. Drilling Capacity [Wood	d] 30 mm
Max. Drilling Capacity [Meta	] 13 mm
Weight	1.65 kg
Length	219 mm
Height	191 mm



18V DCD776C2	
Battery Capacity	1.3 Ah
Max Torque (Hard)	42 Nm
Max Torque (Soft)	24 Nm
Power Output	300 Watt
No Load Speed 0-45	50/1500 rpm
Beats per Minute 0-7650	/25500 bpm
Chuck Capacity	1.5-13 mm
Max. Drilling Capacity [Wood]	30 mm
Max. Drilling Capacity [Metal]	13 mm
Max. Drilling Capacity [Masonry]	13 mm
Weight	1.72 kg
Length	228 mm
Height	191 mm

# FEATURES OF THE CORDLESS/BRUSHLESS RANGE

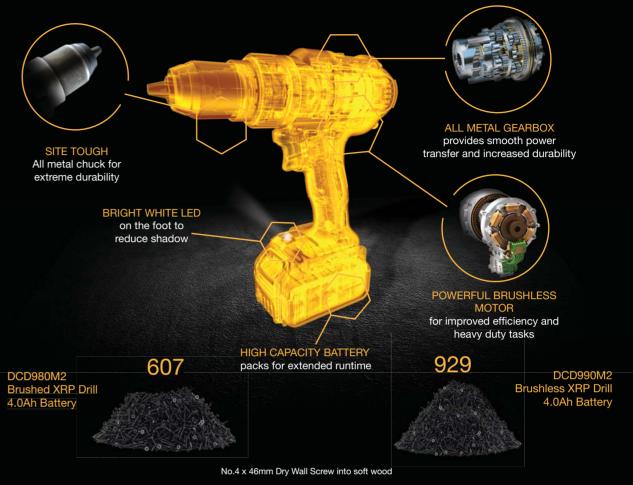





18V DCGG571M1	
Battery Capacity	4.0 Ah
Output Pressure	690 bar
Output Pressure	10,000 PSI
Feed Rate	147 g/min
Grease Type	Up to NLGI #2
Grease Capacity (Bulk)	453g
Grease Capacity (Cartridge)	400g
Hose Length	1000mm
Height	230mm



Plant Equipment Maintenance





**Automotive Fleet** 



Earth Moving / Construction Equipment Maintenance

**(** 









# **XR LI-LON HIGH TORQUE WRENCH**

18V DCF899P2



### 18V DCF8QQP2

101 201022	
Battery Capacity	5.0 A
Max. Torque	950 N
Power Output	449 Wa
No Load Speed	0 - 1500 rp
Impacts per Minute	0 - 2300 ip
Max. Bolt Diameter	M2
Bit Holder	1/2
Weight	3.4 k
Length x Height	264 x 260 m



**Driving Foundation Bolts** in Structural Applications







AH

**Power Output** 

High capacity battery packs available as 4.0Ah

170Nm

290W

3 LED worklights

Push button chuck fast loading & unloading

18V DCF895M2 **Battery Capacity** 2.0Ah/4.0Ah Max Torque

No Load Speed 0-950/0-1900/0-2850 RPM Length 132mm 1.48 kg/1.7 kg Weight

1/4 inch hex chuck 1 handed loading

**XR IMPACT DRIVERS** 

18V DCF886M2 18V DCF895M2

AH

Compact size 132/140mm length

BRUSHLESS

18V X L- 18V DCF886M2

**Battery Capacity** 2.0Ah/4.0Ah Max Torque 165Nm Power Output 280W No Load Speed 0-2800 RPM 140mm Length

**BRUSHLESS** 

Weight 1.14 kg

**(** 

### **CORDLESS**



Rubber over mould - ergonomic handle design enables comfortable use over extended periods



Quick change multi position accessory system allows fast blade changes whilst working in different

extraction kit -Manage dust and AIR









**BRUSHLESS** 



Responsive trigger and variable speed control allows for a simple soft start function, and complete application control

Battery Capacity

**Power Output** Voltage

Speed

Weight

Oscillation



18V DCS355D2/M2

**Coating Removal** 



2.0Ah/4.0Ah

2.0Ah or 4.0Ah

0-20,000 opm

1.46kg (2.0Ah)

1.68kg (4.0Ah)

300 W

18V

3.2°

**Cutting Metal / Wood** 











Drilling Holes in Ceiling For Dry wall Installation



**XR LI-ION BRUSHLESS** 

18V DCH273P2	
Battery Capacity	5.0Ah
Power Output	400W
No Load Speed	0-1200rpm
Impact energy (EPTA 05/2009)	2.1J
Blows per Minute	0-4500bpm
Tool Holder	SDS-Plus
Max. Drilling Capacity [Wood]	26mm
Max. Drilling Capacity [Metal]	13mm
Max. Drilling Capacity [Concrete]	24mm
Weight	3.1 kg
Length	301
Height	202
Hand/Arm Vibration - Drilling	6.6 m/s2

18V DCH273P2



Drilling Anchor Holes in Ceiling For MEP Applications



**(** 

## XR LI-ION RECIPROCATING SAW

18V DCS380M2



18V DCS380M2

104 DC3300MZ	
Battery Capacity	4.0Ał
Power Output	560 Wat
No Load Stroke Rate	0-2950 spm
stroke Length	28.6mm
Weight	3.3kç
Length x height	425x195mm







Cutting Aluminium & Steel Channels & Extrusions





LI-ION HEAVY DUTY 3 MODE QUICK CHANGE CHUCK DEDICATED CORDLESS HAMMER



36V DCH364M2	
Battery Capacity	4.0 Ah
Power Output	450 Watt
No Load Speed	0-1150 rpm
Impact energy (EPTA 05/2009)	2.2 J
Blows per Minute	0-4300 bpm
Tool Holder	SDS-Plus
Max. Drilling Capacity [Wood]	30 mm
Max. Drilling Capacity [Metal]	13 mm
Max. Drilling Capacity [Concre	te] 26 mm
Weight	3.8 kg
Length x Height	320 x 230 mm
Hand/Arm Vibration - Drilling	8.5 m/s <sup>2</sup>
	The second section of the





Cordless 3.indd FC7-FC8