


# FALCON FS520C

#### Reach diagram — Optimised position

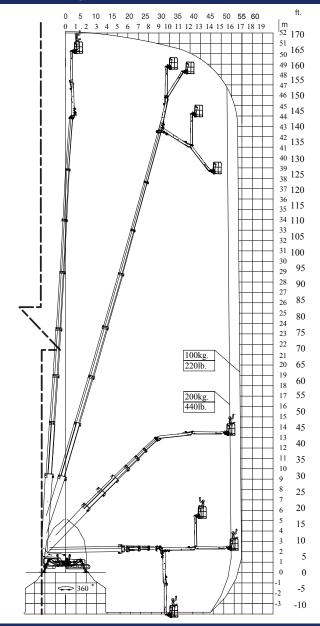





#### Reach with outriggers in different positions

Standard

Measurements in meters

16m

16m

16m

16m

16m

Basket load = 200kg


TCA LIFT A/S
Tolderlundsvej 106


DK • 5000 Odense C Tel.:+45 66 13 11 00

www.tcalift.com

All measurements are intended as guide. Choice of equipment may change the mentioned measurements



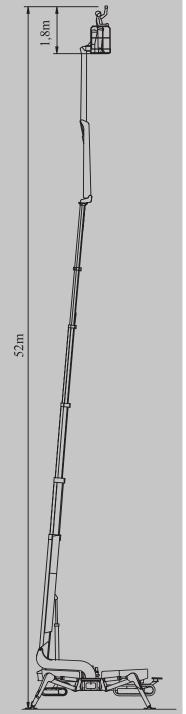

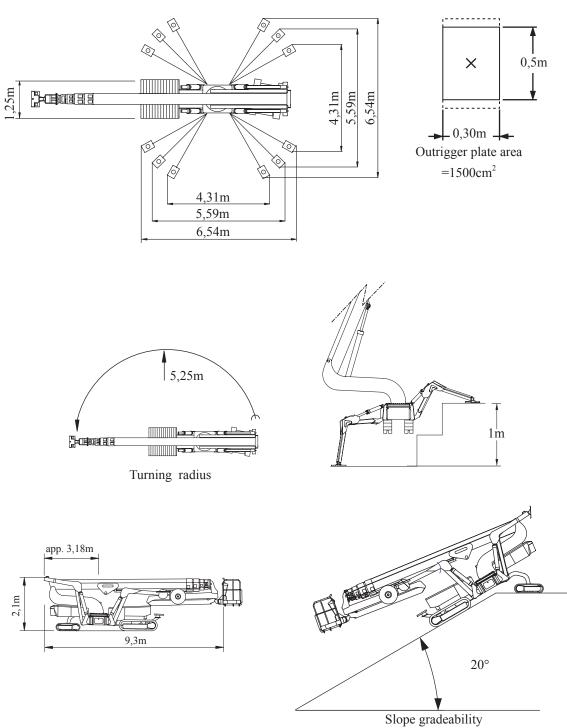

## Additional info:

### Weight and ground pressure:

Weight with standard equipment
Surface pressure under crawlers (soft surface)
Surface pressure under crawlers (hard surface)
Max. ground pressure under 1 outrigger plate

13500 kg

0,85 kg/cm<sup>2</sup>

1,20 kg/cm<sup>2</sup>

3,60 kg/cm<sup>2</sup>

As all our products are in a constant process of development we reserve the right to alterations

