



**Jeddah**<sup>cables</sup>  
**COMPANY**

A Company of Energya Cables Saudi Arabia

## LOW VOLTAGE CABLES



## **Introduction**



Low Voltage Power Cables are used to transmit electrical energy from one location to another. Low Voltage Power Cables are usually employed in the distribution process of electricity to various loads such as house holds.

In this catalogue, we cover all technical aspects of Jeddah Cable Company Low Voltage Power Cables. We included design considerations such as type of insulation material (i.e. PVC and XLPE), insulation thickness, type of armour ,armour diamensions, sheath material and sheath thickness. Cables Electrical Parameters such as Conductor DC Resistance and current ratings are included as well.



Jeddah Cable Company Low Voltage Power Cables are manufactured based on international standards such as IEC 60502-1, BS 5467and BS 6346. We are also capable of manufacturing according to client requirements and needs.



## Low Voltage Cables

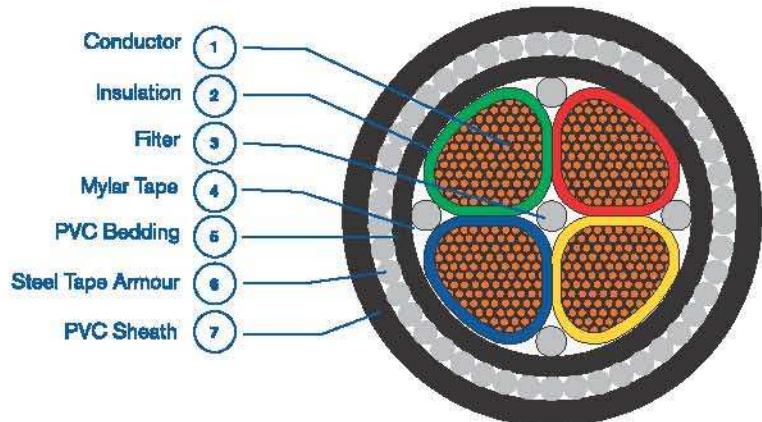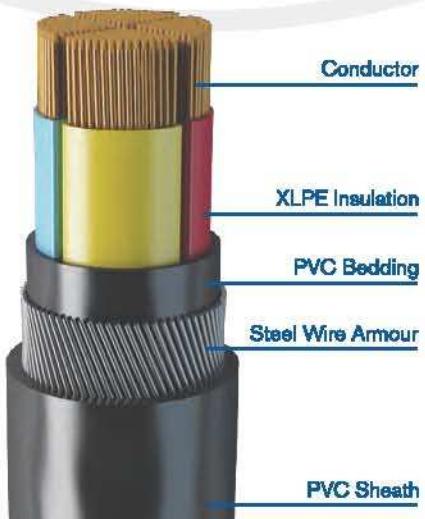

**Sector Shape 4 Cores**

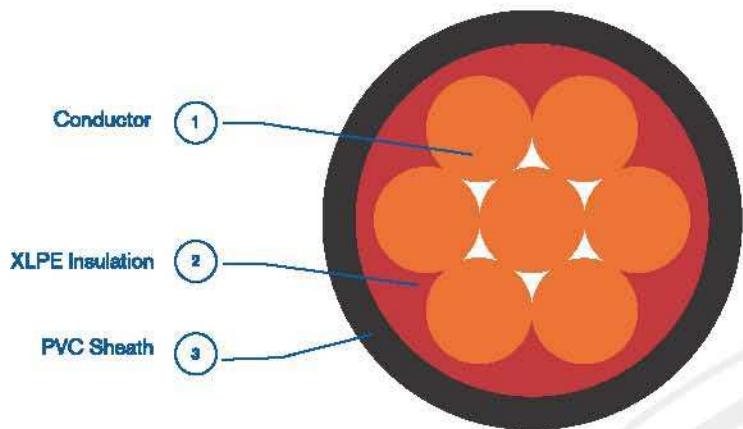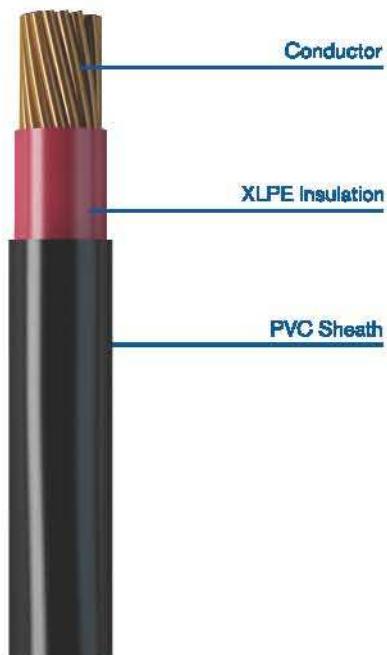

**Round Shape 1 Core**

## **Low Voltage Power Cables - Design and Testing**

Low voltage power cables are normally either single core or multi-core (i.e three-core or four-core).

- Conductor Design

Conductors are made of copper or aluminum . They are circular stranded, compacted or non-compacted, or shaped (i.e. sectors). Our conductor design is in compliance with the requirements of IEC 60228 and BS 6360 specifications.

- Insulation

- XLPE material, and complies with the requirements of IEC 60502-1 and BS 5467 Specifications.
- PVC material, and complies with the requirements of IEC 60500-1, BS 6346, and SASO 1694 specifications.

## **Assembly**

All cable cores are laid-up together with usage of non-hygroscopic filler material and are temperature compatible with all different cable layers such as insulation, bedding, and sheath.

## **Armoring**

Armoring material can be either Aluminum for single core cables or Steel for multi-core cables. Armor can be either wires or tape .Our cable armoring is in compliance with the requirements of IEC 60502-1, BS 5467, and BS 6346 Specifications.

## **Outer Sheath / Jacket**

Our cables sheathes are made of extruded layers of PVC or PE material and is in compliance with the requirements of IEC 60502-1 and BS 7655 Specifications . We are also capable of providing cable sheaths with special requirements to be:

- Termite retardant
- Oil & Gasoline retardant
- Ozone / acid / alkali retardant
- Flame retardant and in compliance with requirements of IEC 60332-1 and IEC 61034-2
- Low Smoke Halogen Free and in compliance with requirements of BS 7211 and BS 6724.

## **Testing of Low Voltage Power Cables**

We Jeddah Cable Company are capable of performing all standard routine tests and sample tests that are normally carried out in accordance to IEC 60502 standards. We have all necessary equipment for such tests such as high voltage labs and special oven. We are also capable of performing tests in accordance with international or national requirements as agreed upon with our customers.

- Routine Tests
  - Voltage Test
  - Measurement of the electrical resistance of conductors
- Sample Tests
  - Conductor examination
  - Check of dimensions
  - Hot set test for XLPE insulations

## **General Information**

### **Selecting A Power Cables**

The following factors are important when selecting a suitable cable construction which is required to transport electrical energy from the power station to the consumer:

- Maximum operating voltage
- Insulation level
- Frequency
- Load to be carried
- Magnitude and duration of possible overload
- Magnitude and duration of short-circuit current
- Voltage drop
- Length of line
- Mode of installation
  - \* underground (direct or in ducts)
  - \* in air
- Chemical and physical properties of soil
- Max. and min. ambient air temperature and soil temperatures
- Specification and requirements to be met

### **Voltage**

The standard rated voltage of a cable is denoted by  $U_0/U$  ( $U_m$ ), i.e. "0.6/1 (1.2)" where:

$U_0$ : is the rated power-frequency voltage between conductor and earth

$U$ : is the rated power-frequency voltage between conductors.

$U_m$ : is the maximum continuously permissible operating voltage of a cable at any time or in any part of the network.

### **Standards**

The cables described in this catalogue are all standard types, and their performance has been proved in operation. Construction and tests are in accordance with the recommendation of IEC publications where applicable.

Power cables in accordance to other standards (e.g. BS, VDE, NEMA) can be manufactured upon customer's request.

### **Variation in Production and Delivery Options**

- The provided data are approximate
- Delivery length tolerance is  $\pm 5\%$  and subject to manufacturing tolerance
- Other sizes are available upon request.

### **Jacket Marking**

Standard embossed outer jacket marking consisting of:

- 1 - Name of manufacturer
- 2 - Type designation, size of conductor, rated voltage and standard.
- 3 - Continuous length marking every meter.
- 4 - Year of manufacture.



## Laying Information

### Minimum Bending Radius During Installation

During laying, the bending radius should not be smaller than values given below.

The radius depends on the outer diameter ( $D_o$ ) of the cable.

### PVC and XLPE insulated Cables up to 3.6 kV

<b>Conductor</b>	<b>Construction</b>	<b>Outer diameter (mm)</b>	<b>Min. Radius</b>
Stranded aluminum or copper	Armoured or Unarmoured	Any	8 $D_o$

### Maximum Tensile Forces During laying

<b>Means of Pulling</b>	<b>Type of Cable</b>	<b>Formula</b>	<b>Factor</b>
With pulling head attached to the conductors	All types of cables	$P = \sigma \cdot A$	$\sigma = 50 \text{ N/mm}^2$ (Copper conductor) $\sigma = 30 \text{ N/mm}^2$ (Al conductor)
with pulling stocking	Un-armoured cables	$P = \sigma \cdot A$	$\sigma = 50 \text{ N/mm}^2$ (Copper conductor) $\sigma = 30 \text{ N/mm}^2$ (Al conductor)
	Armoured cables	$P = k \cdot d^2$	$k = 9 \text{ N/mm}$

$P$  = Pull in N

$A$  = Total cross sectional area in  $\text{mm}^2$  of all conductors

$d$  = Outside diameter of the cable in mm

$\sigma$  = Permissible tensile stress of conductor in  $\text{N/mm}^2$

$k$  = Emperically derived factor in  $\text{N/mm}^2$

## **Electrical Parameters Of The Cables**

### **DC Resistance of Conductor**

The Maximum DC resistance values of conductors at 20°C are as per "IEC 60228" standard. DC resistance per unit length of the conductor at other conductor temperature is given by:

$$R = R_0 [1 + \alpha_{20^\circ\text{C}} (t - 20^\circ\text{C})]$$

Where :

R = DC resistance at temperature t °C Ω/km

R<sub>0</sub> = D.C resistance at temperature 20°C

Ω/km (given in the relative tables for each type of cable)

t = Conductor temperature °C

$\alpha_{20^\circ\text{C}}$  = Temperature coefficient at 20°C 1/°C

For copper conductor  $\alpha_{20^\circ\text{C}} = 0.00393$

For aluminum conductor  $\alpha_{20^\circ\text{C}} = 0.00403$

### **A.C. Resistance of Conductor**

The AC Resistance per unit length of the conductor (effective resistance) at its maximum operating temperature is made up of the DC resistance at this temperature and the extra resistance which takes into account additional losses caused by the current displacement in the conductor (skin effect, proximity effect). The AC resistance is given in the relative tables for each type of cable.

### **Inductance**

The values of the inductance for both multi cores and three single core cables have been calculated based on the following equation

$$L = K + 0.2 \ln (2S / d) \text{ (mH/km)}$$

Where:

K = a constant relating to the conductor formation (mH/km).

d = the conductor diameter (mm)

S = axial spacing between conductors for cables in trefoil formation (mm)

= 1.26 x axial spacing between conductors for cables in flat formation (mm)

The values for inductance of single core cables has been calculated based on one cable diameter between cables in flat formation.

### **Operation Capacitance**

The values of operating capacitance for cables has been calculated based on the following presumption:

$$C = \frac{\epsilon_r}{18 \ln (D / d)} \text{ (\mu F/km)}$$

Where :

$\epsilon_r$  = Relative permittivity of insulation

D = External diameter of insulation (mm)

d = Conductor diameter (mm)

### **Operation Temperature for XLPE Insulated Cables**

90°C for continuous normal operation

105°C for emergency overload conditions.

250°C for short circuit conditions .

## Voltage Drop

When current flows in a cable conductor, there is a voltage drop between the ends of the conductor which is the product of the current and the impedance . The following equations should be used to calculate the voltage drop:

1- Single phase system

$$V_d = 2(R \cos\phi + X \sin\phi) \text{ (Volt/amp/meter)}$$

2-Three phase system

$$V_d = \sqrt{3}(R \cos\phi + X \sin\phi) \text{ (Volt/amp/meter)}$$

Where:

$V_d$  = Voltage drop (V/A.m)

R = AC resistance of conductor at a maximum conductor temperature ( $\Omega/\text{km}$ )

X = Inductive reactance of cable ( $\Omega/\text{km}$ )

Cos $\phi$  = power factor of load

\* Voltage drop data for L.V cables are tabulated in tables 16 to 23.

## Cable Short Circuit Capacity

The permissible short-circuit as presented in tables 12 to 15 are calculated in accordance with IEC 724, which are based on the following conditions:

1- Short circuit starts from the maximum operating temperature.

2- Maximum temperature during short circuit XLPE = 250 °C, PVC = 160°C

3- Maximum short circuit current duration is 5 seconds.

The short - circuit current (I) shall be calculated from the formula.

$$I_2 = \frac{K^2 \times S^2}{T} \times \ln \left[ \frac{\theta_1 + \beta}{\theta_2 + \beta} \right]$$

Where:

I = Short circuit current (A)

T = Duration of short circuit (Second)

K = Constant for the material of the conductor

S = Area of conductor ( $\text{mm}^2$ )

$\theta_1$ = Final temperature (°C)

$\theta_2$ = Initial temperature (°C)

$\beta$  = Reciprocal of the temperature coefficient of resistance ( ) of the conductor.

## **Current Ratings**

### **Recommendations For Current Ratings**

The current rating of power cables is defined by the maximum intensity of current (in amperes), which can flow continuously through the cable, under permanent loading conditions without any risk of damaging the insulation or deterioration of its electrical properties.

- Current carrying capacities have been calculated in accordance with IEC 60287 (calculation of the continuous current rating of cables)
- The values given in the tables are valid for one circuit in three phase system under conditions specified. For grouping cables rating factors must be used.
- It is to be observed that the current carrying capacities presented in JCC technical data sheets are intended as a guide to assist operating engineers in selecting cables for safety and reliability.
- Basic assumptions and conditions of installation:
  - \* Ambient ground temperature: 20°C
  - \* Ambient air temperature : 30°C
  - \* Depth of cable burial : 1.0 m
  - \* Thermal resistivity of soil : 120°C. cm / W
  - Cables in air are assumed to be protected from direct solar radiation.
- Single core cables are installed as indicated in the technical information tables . Spacing between cables in flat formation is assumed to be one cable diameter.
- For three and four core cables, it is usual to assume the same current carrying capacity for four cores cables as for three core cables. Our calculated values are based actually on three core cables. These values are suitable with enough accuracy also for four cores cables in most cases.
- The inner diameter of ducts has been assumed to be at least 1.5 times the diameter of the cables.

To obtain the maximum current carrying capacity of a cable operating at different conditions from the standards, you have to multiply the values of the current given in the technical information for the corresponding cable by the rating factors mentioned in the tables from 1 to 11, as follows:

$$I_a = K_t \cdot I_s \text{ in amperes}$$

where:

$I_a$  : Current rating at actual operating conditions (amperes)

$I_s$  : Current rating at standard operating conditions (amperes).

$K_t$  : Rating factor given in the tables 1 to 11. it has to be noted that  $K_t$  is the total rating factor :  $K_t = K_1 K_2 \dots K_n$

You may have a multiplication of so many partial rating factors, as many as the difference of laying and operating conditions from standard conditions.

**Table 1**  
**RATING FACTORS K FOR VARIATION IN GROUND TEMPERATURE**

GROUND TEMPERATURE °C	20	25	30	35	40	45	50	55
PVC cables rated 70°C	1.00	0.95	0.90	0.84	0.78	0.71	0.63	0.54
PVC cables rated 85°C	1.00	0.96	0.92	0.87	0.83	0.78	0.73	0.67
XLPE cables rated 90°C	1.00	0.96	0.92	0.88	0.84	0.79	0.75	0.70

**Table 2**  
**RATING FACTORS K FOR VARIATION IN AIR TEMPERATURE**

AIR TEMPERATURE °C	25	30	35	40	45	50	55
PVC cables rated 70°C	1.07	1.00	0.93	0.87	0.79	0.70	0.61
PVC cables rated 85°C	1.04	1.00	0.95	0.90	0.85	0.80	0.74
XLPE cables rated 90°C	1.04	1.00	0.96	0.91	0.87	0.82	0.76

**Table 3**  
**RATING FACTORS K FOR VARIATION IN GROUND DEPTH**

DEPTH OF LAYING (m)	0.6	0.7	0.8	0.9	1.0	1.1	1.2
k	1.05	1.03	1.02	1.01	1.0	0.99	0.98

**Table 4**  
**RATING FACTORS K FOR VARIATION IN SOIL RESISTIVITY**

SOIL RESISTIVITY ( °C. cm/W)	80	90	100	120	150	200	250
k	1.17	1.12	1.07	1.0	0.91	0.80	0.73

**Table 5**  
**RATING FACTORS K FOR VARIATION OF MAX. OPERATING  
TEMPERATURES FOR PVC INSULATING CABLES**

PVC RATED TEMPERATURE	70	85	105
RATING FACTOR	0.84	1.00	1.18

**Table 6**

**TREFOIL OR FLAT FORMATION DERATING FACTORS FOR THREE SINGLE CORE CABLES LAID DIRECT IN GROUND**




NUMBER OF CIRCUITS	SPACING SPACING			SPACING SPACING		
	TREFOIL FORMATION			TREFOIL FORMATION		
	TOUCHING		SPACING = 0.15 M		SPACING = 0.30 M	
NR	TREFOIL	FLAT	TREFOIL	FLAT	TREFOIL	FLAT
2	0.77	0.80	0.82	0.85	0.88	0.91
3	0.66	0.69	0.73	0.76	0.80	0.83
4	0.60	0.63	0.68	0.71	0.74	0.77
5	0.56	0.59	0.64	0.67	0.72	0.75
6	0.53	0.57	0.61	0.64	0.70	0.73

**Table 7**





**TREFOIL OR FLAT FORMATION DERATING FACTORS FOR MULTI-CORE CABLES LAID DIRECT IN GROUND**

NUMBER OF CABLES	TREFOIL FORMATION			FLAT FORMATION		
	TOUCHING		SPACING = 0.15 M		SPACING = 0.30 M	
	TREFOIL	FLAT	TREFOIL	FLAT	TREFOIL	FLAT
2	0.81	0.81	0.87	0.87	0.91	0.91
3	0.69	0.70	0.76	0.78	0.82	0.84
4	0.62	0.63	0.72	0.74	0.77	0.81
5	0.58	0.60	0.66	0.70	0.73	0.78
6	0.54	0.56	0.63	0.67	0.70	0.76

**Table 8**
**FLAT FORMATION DERATING FACTORS FOR THREE SINGLE CORE CABLES LAID IN FREE AIR**


Clearance = Cable diameter ( $d$ )		Number of circuits			$\geq 2\text{cm}$
Clearance from the wall 2 cm		1	2	3	
Laid on the Floor		0.92	0.89	0.88	
Laid cables	Number of troughs				
troughs	1	0.92	0.89	0.88	
(circulation of air	2	0.87	0.84	0.83	
is restricted)	3	0.84	0.82	0.81	
	6	0.82	0.80	0.79	
Laid	Number of racks				
on cable racks	1	1.00	0.97	0.96	
	2	0.97	0.94	0.93	
	3	0.96	0.93	0.92	
	6	0.94	0.91	0.90	
Arranged near the wall		0.94	0.91	0.89	
Arranged on the wall		0.89	0.86	0.84	

**Table 9**
**TREFOIL TOUCHING FORMATION DERATING FACTORS FOR THREE SINGLE CORE CABLES IN FREE AIR**


Clearance = 2 ( $d$ )		Number of circuits			$\geq 2\text{cm}$
Clearance from the wall 2 cm		1	2	3	
Laid on the Floor		0.95	0.90	0.88	
Laid cables	Number of troughs				
troughs	1	0.95	0.90	0.88	
(circulation of air	2	0.80	0.85	0.83	
is restricted)	3	0.88	0.83	0.81	
	6	0.86	0.81	0.79	
Laid	Number of racks				
on cable racks	1	1.00	0.97	0.96	
	2	0.97	0.94	0.93	
	3	0.96	0.93	0.92	
	6	0.94	0.91	0.90	
Arrangements					
for which reduction					
of the current					
is not necessary					

**Table 10****HORIZONTAL OR VERTICAL FORMATION DERATING FACTORS FOR MULTI-CORE CABLES LAID IN FREE AIR**

Clearance = Cable diameter (d)	Number of Cables					
Clearance from the wall $\geq 2$ cm	1	2	3	6	9	
Laid on the Floor	0.95	0.90	0.88	0.85	0.84	
Number of troughs						
Laid cables	1	0.95	0.90	0.88	0.85	0.84
troughs	2	0.90	0.85	0.83	0.81	0.80
(circulation of air is restricted)	3	0.88	0.83	0.81	0.79	0.78
	6	0.86	0.81	0.79	0.77	0.76
Number of racks						
Laid cables on cable racks	1	1.00	0.98	0.96	0.93	0.92
	2	1.00	0.95	0.93	0.90	0.89
	3	1.00	0.94	0.92	0.89	0.88
	6	1.00	0.93	0.90	0.87	0.86
Arranged near the wall	1.00	0.93	0.90	0.87	0.86	
Arrangements for which reduction of the current is not necessary	Clearance from the wall		Clearance between cables			
	$\geq 2$ cm		$\geq 2d$			

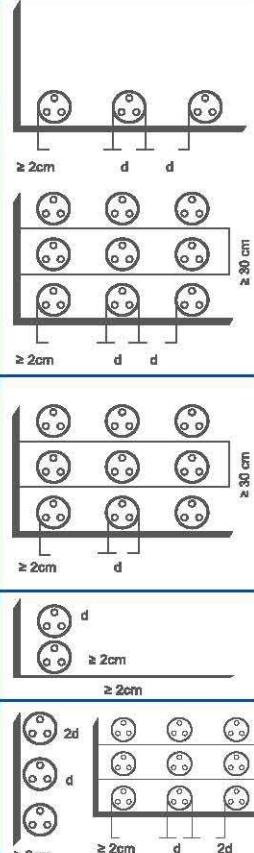
**Table 11****DERATING FACTORS FOR MULTI-CORE CABLES TOUCHING AND IN CONTACT WITH THE WALL IN FREE AIR**

Clearance touching troughs and contact with wall	Number of Cables					
	1	2	3	6	9	
Laid on the ground	0.90	0.84	0.80	0.75	0.73	
Number of troughs						
Laid cables	1	0.95	0.84	0.80	0.75	0.73
troughs	2	0.95	0.80	0.76	0.71	0.69
(circulation of air is restricted)	3	0.95	0.78	0.74	0.70	0.68
	6	0.95	0.76	0.72	0.68	0.66
Number of racks						
Laid	1	0.95	0.84	0.80	0.75	0.73
	2	0.95	0.80	0.76	0.71	0.69
on cable racks	3	0.95	0.78	0.74	0.70	0.68
	6	0.95	0.76	0.72	0.68	0.66
Arranged near the wall	0.95	0.78	0.73	0.68	0.66	

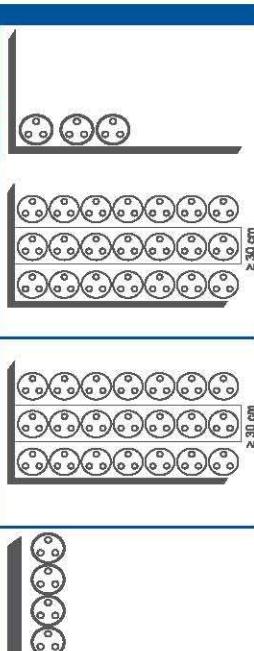

**Table 12**
**SHORT CIRCUIT CURRENT FOR COPPER CONDUCTORS - XLPE  
INSULATED (KA) at (90/250)°C**

Area (mm <sup>2</sup> )	TIME (s)									
	0.1	0.2	0.3	0.4	0.5	1	2	3	4	5
16	7.24	5.12	4.18	3.62	3.24	2.29	1.82	1.32	1.14	1.02
25	11.31	8.00	6.53	5.66	5.06	3.58	2.53	2.07	1.79	1.60
35	15.84	11.20	9.14	7.92	7.08	5.01	3.54	2.89	2.50	2.24
50	22.62	16.00	13.06	11.31	10.11	7.15	5.06	4.13	3.58	3.20
70	31.67	22.40	18.29	15.84	14.16	10.02	7.08	5.78	5.01	4.48
95	42.98	30.39	24.82	21.49	19.22	13.59	9.81	7.85	6.80	6.08
120	54.30	38.39	31.34	27.15	24.28	17.17	12.14	9.91	8.59	7.68
150	67.87	47.99	39.19	33.94	30.35	21.46	15.18	12.39	10.73	9.60
185	83.71	59.19	48.33	41.85	37.42	26.47	18.72	15.28	13.24	11.94
240	108.59	76.79	62.70	54.30	48.56	34.34	24.28	19.83	17.17	15.36
300	135.74	95.98	78.37	67.87	60.71	42.93	30.35	24.78	21.46	19.20

**Table 13**
**SHORT CIRCUIT CURRENT FOR ALUMINIUM CONDUCTORS - XLPE  
INSULATED (KA) at (90/250)°C**

Area (mm <sup>2</sup> )	TIME (s)									
	0.1	0.2	0.3	0.4	0.5	1	2	3	4	5
16	4.78	3.38	2.76	2.39	2.14	1.51	1.07	0.87	0.76	0.68
25	7.47	5.28	4.31	3.73	3.34	2.36	1.67	1.36	1.18	1.06
35	10.46	7.40	6.04	5.23	4.68	3.31	2.34	1.91	1.65	1.48
50	14.94	10.56	8.63	7.47	6.68	4.72	3.34	2.73	2.36	2.11
70	20.91	14.79	12.08	10.46	9.35	6.61	4.68	3.82	3.31	2.96
95	28.38	20.07	16.39	14.19	12.69	8.98	6.35	5.18	4.49	4.01
120	35.85	25.35	20.70	17.93	16.03	11.34	8.02	6.55	5.87	5.07
150	44.82	31.69	25.88	22.41	20.04	14.17	10.02	8.18	7.09	6.34
185	55.28	39.09	31.91	27.64	24.72	17.48	12.36	10.09	8.74	7.82
240	71.71	50.71	41.40	35.85	32.07	22.68	16.03	13.09	11.34	10.14
300	89.64	63.38	51.75	44.82	40.09	28.35	20.04	16.37	14.17	12.68

**Table 14**

**SHORT CIRCUIT CURRENT FOR COPPER CONDUCTORS - PVC INSULATED (TYPE 5), AS PER TABLE 1 OF BS 6746 (KA) at (85/160) °C**

Area (mm <sup>2</sup> )	TIME (s)									
	0.1	0.2	0.3	0.4	0.5	1	2	3	4	5
16	5.25	3.71	3.03	2.63	2.35	1.66	1.17	0.96	0.83	0.74
25	8.20	5.80	4.74	4.10	3.67	2.59	1.83	1.50	1.30	1.16
35	11.49	8.12	6.63	5.74	5.14	3.63	2.57	2.10	1.82	1.62
50	16.41	11.60	9.47	8.20	7.34	5.19	3.67	3.00	2.59	2.32
70	22.97	16.24	13.26	11.49	10.27	7.26	5.14	4.19	3.63	3.25
95	31.18	22.05	18.00	15.59	13.94	9.86	6.97	5.69	4.93	4.41
120	39.38	27.85	22.74	19.69	17.61	12.45	8.81	7.19	6.23	5.57
150	49.23	34.81	28.42	24.61	22.01	15.57	11.01	8.99	7.78	6.96
185	60.71	42.93	35.05	30.36	27.15	19.20	13.58	11.08	9.60	8.59
240	78.76	55.69	45.47	39.38	35.22	24.91	17.61	14.38	12.45	11.14
300	98.45	69.62	56.84	49.23	44.03	31.13	22.01	17.97	15.57	13.92

**Table 15**

**SHORT CIRCUIT CURRENT FOR ALUMINUM CONDUCTORS - PVC INSULATED (TYPE 5) as per TABLE 1 OF BS 6746 (KA) at (85/165) °C**

Area (mm <sup>2</sup> )	TIME (s)									
	0.1	0.2	0.3	0.4	0.5	1	2	3	4	5
16	3.47	2.45	2.00	1.74	1.55	1.10	0.78	0.63	0.55	0.49
25	5.42	3.83	3.13	2.71	2.43	1.71	1.21	0.99	0.86	0.77
35	7.59	5.37	4.38	3.80	3.40	2.40	1.70	1.39	1.20	1.07
50	10.85	7.67	6.26	5.42	4.85	3.43	2.43	1.98	1.71	1.53
70	15.18	10.74	8.77	7.59	6.79	4.80	3.40	2.77	2.40	2.15
95	20.61	14.57	11.90	10.30	9.22	6.52	4.81	3.76	3.26	2.91
120	26.03	18.41	15.03	13.01	11.64	8.23	5.82	4.75	4.12	3.68
150	32.54	23.01	18.79	16.27	14.55	10.29	7.28	5.94	5.14	4.60
185	40.13	28.38	23.17	20.06	17.95	12.69	8.97	7.33	6.34	5.68
240	52.06	36.81	30.06	26.03	23.28	16.46	11.64	9.50	8.23	7.36
300	65.07	46.01	37.57	32.54	29.10	20.58	14.55	11.88	10.29	9.20

**Table 16****0.6/1 KV Cables****Single Core Unarmoured Cables, With Stranded Circular Copper Conductor, XLPE Insulated and PVC Sheathed**

Cross Section Area (mm <sup>2</sup> )	D.C. Resistance (Ω/km)	A.C. Resistance (Ω/km)	Voltage Drop (mV/Amp/meter)
4	4.61	5.878	10.22
6	3.08	3.927	6.894
10	1.83	2.333	4.170
16	1.15	1.466	2.687
25	0.727	0.927	1.766
35	0.524	0.668	1.321
50	0.387	0.493	1.025
70	0.268	0.342	0.765
95	0.193	0.247	0.272
120	0.153	0.196	0.510
150	0.124	0.159	0.447
185	0.0991	0.127	0.393
240	0.0754	0.098	0.342
300	0.0601	0.078	0.310
400	0.0470	0.062	0.278
500	0.0366	0.050	0.256
630	0.0283	0.040	0.237
			10.146
			6.826
			4.097
			2.614
			1.693
			1.248
			0.953
			0.693
			0.529
			0.438
			0.376
			0.322
			0.272
			0.241
			0.211
			0.191
			0.173

**Table 17****0.6/1 KV Cables****Single Core Unarmoured Cables, With Stranded Circular Aluminum Conductor, XLPE Insulated and PVC Sheathed**

Cross Section Area (mm <sup>2</sup> )	D.C. Resistance (Ω/km)	A.C. Resistance (Ω/km)	Voltage Drop (mV/Amp/meter)
16	1.91	2.449	4.361
25	1.20	1.538	0.808
35	0.868	1.113	2.079
50	0.641	0.822	1.590
70	0.443	0.568	1.154
95	0.320	0.410	0.884
120	0.253	0.324	0.734
150	0.206	0.264	0.632
185	0.164	0.211	0.540
240	0.125	0.161	0.452
300	0.100	0.129	0.398
400	0.0778	0.101	0.349
500	0.0605	0.079	0.311
630	0.0469	0.062	0.280
			4.287
			2.735
			2.006
			1.517
			1.081
			0.662
			0.560
			0.469
			0.381
			0.327
			0.279
			0.242
			0.213

The above data are based on:

- Max. operating temperature : 90 °C
- Power factor : 85
- Rated frequency : 60 Hz
- Distance between cables in flat formation: One cable diameter

**Table 18****(0.6/1 KV Cable)****Single Core Unarmoured Cables, With Stranded Circular Copper Conductor, PVC Sheathed Insulated and PVC Sheathed**

Cross Section Area (mm <sup>2</sup> )	D.C. Resistance (Ω/km)	A.C. Resistance (Ω/km)	Voltage Drop (mV/Amp/meter)
4	4.81	5.787	10.07
6	3.08	3.866	6.794
10	1.83	2.297	4.115
16	1.15	1.433	2.654
25	0.727	0.913	1.746
35	0.524	0.658	1.307
50	0.387	0.486	1.018
70	0.268	0.337	0.758
95	0.193	0.243	0.597
120	0.153	0.193	0.509
150	0.124	0.156	0.446
185	0.0991	0.125	0.393
240	0.0754	0.096	0.341
300	0.0601	0.077	0.308
400	0.0470	0.062	0.280
500	0.0366	0.049	0.257
630	0.0283	0.039	0.237
			0.173

**Table 19****(0.6/1 KV Cables)****Single Core Unarmoured Cables, With Stranded Circular Aluminum Conductor, PVC Insulated and PVC Sheathed**

Cross Section Area (mm <sup>2</sup> )	D.C. Resistance (Ω/km)	A.C. Resistance (Ω/km)	Voltage Drop (mV/Amp/meter)
16	1.91	2.410	4.297
25	1.20	1.514	0.769
35	0.868	1.095	2.051
50	0.641	0.809	1.567
70	0.443	0.559	1.137
95	0.320	0.404	0.872
120	0.253	0.319	0.459
150	0.206	0.260	0.623
185	0.164	0.207	0.532
240	0.125	0.158	0.447
300	0.100	0.127	0.393
400	0.0778	0.099	0.344
500	0.0605	0.078	0.307
630	0.0469	0.062	0.275
			0.208

The above data are based on :

- Max. operating temperature : 90 °C
- Power factor : 0.85
- Rated frequency : 60 Hz
- Distance between cables in flat formation : One cable diameter

**Table 20****(0.6/1 KV Cable)****Multicore Cables, With Stranded Copper Conductor, XLPE Insulated and PVC Sheathed**

Cross Section Area (mm <sup>2</sup> )	D.C. Resistance (Ω/km)	A.C. Resistance (Ω/km)	Voltage Drop (mV/Amp/meter)
1.5	12.1	15.428	22.82
2.5	7.41	9.448	14.01
4.0	4.61	5.878	8.747
6.0	3.08	3.927	5.871
10	1.83	2.333	3.519
16	1.15	1.446	2.239
25	0.727	0.927	1.446
35	0.524	0.669	1.063
50	0.387	0.494	0.809
70	0.268	0.343	0.585
95	0.193	0.248	0.444
120	0.153	0.197	0.368
150	0.124	0.161	0.315
185	0.0991	0.130	0.270
240	0.0754	0.101	0.226
300	0.0601	0.083	0.198
400	0.0470	0.067	0.176
500	0.0366	0.056	0.158

**Table 21****(0.6/1 KV Cables)****Multicore Cables, With Stranded Aluminum Conductor, XLPE Insulated and PVC Sheathed**

Cross Section Area (mm <sup>2</sup> )	D.C. Resistance (Ω/km)	A.C. Resistance (Ω/km)	Voltage Drop (mV/Amp/meter)
16	1.91	2.449	3.686
25	1.20	1.538	2.347
35	0.868	1.113	1.717
50	0.641	0.822	1.292
70	0.443	0.568	0.918
95	0.320	0.411	0.684
120	0.253	0.326	0.557
150	0.206	0.266	0.469
185	0.164	0.212	0.391
240	0.125	0.163	0.317
300	0.100	0.132	0.271
400	0.0778	0.104	0.230
500	0.0605	0.083	0.199

The above data are based on:

- Max. operating temperature : 90 °C
- Power factor : 0.85
- Rated frequency : 60 Hz

**Table 22****(0.6/1KV Cable)****Multicore Cables, With Stranded Copper Conductor, PVC Insulated and PVC Sheathed**

Cross Section Area (mm <sup>2</sup> )	D.C. Resistance (Ω/km)	A.C. Resistance (Ω/km)	Voltage Drop (mV/Amp/ meter)
1.5	12.1	15.191	22.476
2.5	7.41	9.303	13.800
4.0	4.61	5.787	8.624
6.0	3.08	3.867	5.791
10	1.83	2.297	3.474
16	1.15	1.444	2.212
25	0.727	0.913	1.430
35	0.524	0.658	1.053
50	0.387	0.486	0.803
70	0.268	0.337	0.581
95	0.193	0.244	0.443
120	0.153	0.194	0.367
150	0.124	0.158	0.315
185	0.0991	0.128	0.269
240	0.0754	0.099	0.226
300	0.0601	0.081	0.199
400	0.0470	0.068	0.176
500	0.0366	0.055	0.159

**Table 23****(0.6/1KV Cable)****Multicore Cables, With Stranded Aluminum Conductor, PVC Insulated and PVC Sheathed**

Cross Section Area (mm <sup>2</sup> )	D.C. Resistance (Ω/km)	A.C. Resistance (Ω/km)	Voltage Drop (mV/Amp/ meter)
16	1.91	2.410	3.635
25	1.20	1.514	2.315
35	0.868	1.096	1.696
50	0.641	0.809	1.278
70	0.443	0.560	0.908
95	0.320	0.405	0.680
120	0.253	0.321	0.554
150	0.206	0.262	0.486
185	0.164	0.209	0.389
240	0.125	0.161	0.316
300	0.100	0.130	0.271
400	0.0778	0.103	0.230
500	0.0605	0.082	0.199

The above data are based on:

- Max. operating temperature : 90 °C
- Power factor : 0.85
- Rated frequency : 60 Hz

## Single core cable

For outdoor installations in damp and wet locations

Type	: CU/XLPE/PVC
Standard	: IEC 60502-1
Rated Voltage	: 0.6/1 KV
Conductor	: Soft annealed stranded copper wires
Insulation	: XLPE compound (or PVC or LSHF)
Jacketing	: PVC compound (or LSHF or PE)



### TECHNICAL INFORMATION

Nominal Cross Section	Nominal Insulation Thickness	Nominal Sheath Thickness	Approx overall Diameter	Approx Cable Weight	Max DC Resistance at 20°C	CURRENT RATING					
						Laid In ground			Laid In Free Air		
						Ⓐ	Ⓑ	Ⓐ	Ⓐ	Ⓑ	Ⓐ
NRxmm <sup>2</sup>	mm	mm	mm	kg/km	ohm/km	A	A	A	A	A	A
4	0.7	1.4	6.72	80	4.6100	59	66	49	59	53	44
8	0.7	1.4	7.13	100	3.0810	74	71	57	73	66	59
10	0.7	1.4	8.2	150	1.8300	97	93	74	94	88	76
16	0.7	1.4	9.2	205	1.1600	125	121	95	129	123	105
25	0.9	1.4	11	310	0.7270	163	154	120	159	152	135
35	0.9	1.4	12	400	0.5240	194	187	148	199	193	170
50	1.0	1.4	13	515	0.3870	228	217	177	246	234	205
70	1.1	1.4	15	720	0.2680	285	268	217	310	298	263
95	1.1	1.5	16.7	980	0.1930	336	319	262	386	374	322
120	1.2	1.5	18.4	1210	0.1530	388	371	296	450	439	380
150	1.4	1.6	20.5	1500	0.1240	428	405	336	509	497	433
185	1.6	1.6	22.5	1840	0.0991	490	462	382	591	579	491
240	1.7	1.7	25.4	2400	0.0754	564	530	439	725	714	597
300	1.8	1.8	27.8	2995	0.0601	638	593	496	918	842	690
400	2.0	1.9	31.2	3800	0.0470	795	673	559	995	971	796
500	2.2	2.0	34.7	4750	0.0366	827	752	621	1203	1100	907
630	2.4	2.2	41.7	6275	0.0283	946	844	707	1287	1264	1065
800	2.6	2.3	46.8	8260	0.0221	1060	935	798	1463	1439	1217
1000	2.8	2.4	51.1	9745	0.0176	1174	1015	866	1615	1591	1348



## Single core cable

For outdoor and indoor installations in damp and wet locations

Type	: AL/XLPE/PVC
Standard	: IEC 60502-1
Rated Voltage	: 0.6/1 KV
Conductor	: Stranded Aluminum wires
Insulation	: XLPE compound (or PVC or LSHF)
Jacketing	: PVC compound (or LSHF or PE)



### TECHNICAL INFORMATION




Nominal Cross Section mm <sup>2</sup>	Nominal Insulation Thickness mm	Nominal Sheath Thickness mm	Approx overall Diameter mm	Approx Cable Weight kg/km	Max DC Resistance ohm/km	CURRENT RATING					
						Laid In ground			Laid In Free Air		
mm <sup>2</sup>	mm	mm	mm	kg/km	ohm/km	A	A	A	A	A	A
16	0.7	1.4	9.21	115	1.9100	97	95	72	89	94	70
25	0.9	1.4	11.3	165	1.2000	123	120	91	129	123	105
35	0.9	1.4	12.01	205	0.8680	148	143	114	158	152	135
50	1.0	1.4	13.0	260	0.6410	177	169	131	193	187	164
70	1.1	1.4	16.0	340	0.4430	217	205	165	246	240	199
95	1.1	1.5	16.7	450	0.3200	257	245	194	316	304	240
120	1.2	1.5	18.4	550	0.2590	302	285	234	363	351	269
150	1.4	1.6	20.5	570	0.2060	336	319	257	415	404	333
185	1.6	1.6	24.2	830	0.1640	382	365	291	486	466	374
240	1.7	1.7	27.0	1050	0.1250	445	422	342	573	556	445
300	1.8	1.8	27.8	1300	0.1000	507	473	388	644	632	515
400	2.0	1.9	33.2	1610	0.0778	587	547	445	772	755	606
500	2.2	2.0	36.2	2000	0.0605	661	618	507	901	878	702
630	2.4	2.2	42.2	2620	0.0469	758	701	581	1053	1030	831
800	2.6	2.3	46.8	3150	0.0367	855	784	650	1193	1170	948
1000	2.8	2.4	51.8	3870	0.0291	946	832	707	1310	1287	1078

## Multicore cable

For outdoor and indoor installations in damp and wet locations

Type	: CU/PVC/PVC
Standard	: IEC 60502-1
Rated Voltage	: 0.6/1 KV
Conductor	: Soft annealed stranded copper wires (or Aluminum)
Insulation	: PVC compound
Bedding	: PVC compound (or LSHF or PE)
Jacketing	: PVC compound (or LSHF or PE)

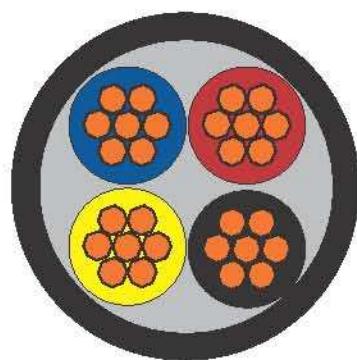

## TECHNICAL INFORMATION


Nominal Cross Section	Nominal Insulation Thickness	Nominal Sheath Thickness	Approx overall Diameter	Approx Cable Weight	Max DC Resistance at 20°C	CURRENT RATING		
						Laid Direct In ground	Laid In Ducts	Laid In Free Air
NR X mm <sup>2</sup>	mm	mm	mm	kg/km	ohm/km	A	A	A
2*1.5	0.8	1.8	11.9	190	12.100	33	27	27
2*2.5	0.8	1.8	12.8	230	7.410	41	35	35
2*4	1.0	1.8	14.7	315	4.610	55	45	49
2*6	1.0	1.8	16.0	390	3.080	68	56	63
2*10	1.0	1.8	17.6	515	1.830	89	77	84
2*16	1.0	1.8	19.7	695	1.150	116	91	112
2*25	1.2	1.8	23.12	995	0.727	150	119	147
2*35	1.2	1.7	25.1	1020	0.524	177	147	182
3*1.5	0.8	1.8	12.4	215	12.100	29	25	22
3*2.5	0.8	1.8	13.4	270	7.410	37	32	28
3*4	1.0	1.8	15.4	370	4.610	49	42	39
3*6	1.0	1.8	16.7	480	3.080	61	50	49
3*10	1.0	1.8	18.6	630	1.830	82	67	64
3*16	1.0	1.8	20.8	880	1.150	102	84	91
3*25	1.2	1.8	24.5	1215	0.727	136	112	119
3*35	1.2	1.8	27.0	1615	0.524	163	133	140
ph/N				ph/N				
3*10+8	1.0	1.8	19.6	715	1.83/3.08	82	67	67
3*16+10	1.0	1.8	22.0	983	1.15/1.83	102	84	91
3*25+16	1.2/1.0	1.8	25.7	1455	0.727/1.15	136	112	119
3*35+16	1.2/1.0	1.8	27.6	1740	0.524/1.15	163	133	140
4*1.5	0.8	1.8	13.2	250	12.100	29	25	22
4*2.5	0.8	1.8	14.3	315	7.410	37	32	28
4*4	1.0	1.8	16.8	440	4.610	49	42	39
4*6	1.0	1.8	18.0	550	3.080	61	50	49
4*10	1.0	1.8	20.2	775	1.830	82	67	64
4*16	1.0	1.8	22.6	1085	1.150	102	84	91
4*25	1.2	1.8	26.8	1580	0.727	136	112	119
4*35	1.2	1.8	29.4	2025	0.524	163	133	140
5*1.5	0.8	1.8	12.9	235	12.100	29	25	22
5*2.5	0.8	1.8	14.1	380	7.410	37	32	28
5*4	1.0	1.8	17.9	525	4.610	49	42	39
5*6	1.0	1.8	19.4	620	3.080	61	50	49



## Multicore cable

For outdoor and indoor installations in damp and wet locations

Type	: CU/XLPE/PVC
Standard	: IEC 60502-1
Rated Voltage	: 0.6/1 KV
Conductor	: Soft annealed stranded copper wires (or Aluminum)
Insulation	: XLPE compound
Bedding	: PVC compound (or LSHF or PE)
Jacketing	: PVC compound (or LSHF or PE)

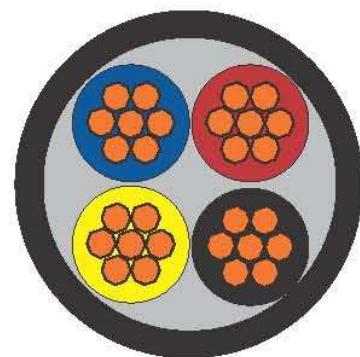

### TECHNICAL INFORMATION




Nominal Cross Section	Nominal Insulation Thickness	Nominal Sheath Thickness	Approx overall Diameter	Approx Cable Weight	Max DC Resistance at 20°C	CURRENT RATING		
						Laid Direct in ground	Laid In Ducts	Laid In Free Air
NR x mm <sup>2</sup>	mm	mm	mm	kg/km	ohm/km	A	A	A
2*1.5	0.7	1.8	11.5	170	12.100	34	29	28
2*2.5	0.7	1.8	12.4	205	7.410	42	37	37
2*4	0.7	1.8	13.5	260	4.610	57	47	51
2*6	0.7	1.8	14.6	325	3.080	72	61	67
2*10	0.7	1.8	16.4	455	1.830	93	81	88
2*16	0.7	1.8	18.4	620	1.150	121	97	117
2*25	0.9	1.8	22.0	920	0.727	158	125	154
2*35	0.9	1.8	24.1	1140	0.524	189	157	185
3*1.5	0.7	1.8	12.0	190	12.100	30	27	25
3*2.5	0.7	1.8	13.0	235	7.410	40	34	36
3*4	0.7	1.8	14.1	315	4.610	51	42	46
3*6	0.7	1.8	15.3	400	3.080	65	53	56
3*10	0.7	1.8	17.9	555	1.830	86	70	76
3*16	0.7	1.8	19.5	770	1.150	111	88	99
3*25	0.9	1.8	23.3	1150	0.727	146	119	135
3*35	0.9	1.8	25.6	1480	0.524	177	140	161
3*10+6	0.7	1.8	18.1	625	1.83/3.08	86	70	76
3*16+10	0.7	1.8	20.4	880	1.15/1.83	111	88	99
3*25+18	0.9/0.7	1.8	24.2	1305	0.727/1.15	146	119	135
3*35+16	0.9/0.7	1.8	26.2	1620	0.524/1.15	177	140	161
4*1.5	0.7	1.8	12.8	225	12.100	30	27	25
4*2.5	0.7	1.8	14.0	290	7.410	40	34	36
4*4	0.7	1.8	15.2	375	4.610	51	42	46
4*6	0.7	1.8	16.6	480	3.080	65	53	56
4*10	0.7	1.8	18.6	675	1.830	86	70	76
4*16	0.7	1.8	21.1	955	1.150	111	88	99
4*25	0.9	1.8	25.3	1435	0.727	146	119	135
4*35	0.9	1.8	28.0	1865	0.524	177	140	161
5*1.5	0.7	1.8	13.6	255	12.100	30	27	25
5*2.5	0.7	1.8	14.8	380	7.410	40	34	36
5*4	0.7	1.8	16.3	430	4.610	51	42	46
5*6	0.7	1.8	17.8	600	3.080	85	53	56

## Multicore cable

For outdoor and indoor installations in damp and wet locations

Type	: CU/XLPE/STA/PVC
Standard	: IEC 60502-1
Rated Voltage	: 0.6/ 1 KV
Conductor	: Soft annealed stranded copper wires (or Aluminum)
Insulation	: XLPE compound
Bedding	: PVC compound (or LSHF or PE)
Armouring	: Steel Tape
Jacketing	: PVC compound (or LSHF or PE)

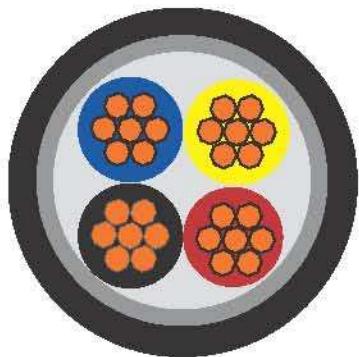

## TECHNICAL INFORMATION


Nominal Cross Section	Nominal Insulation Thickness	Nominal Diameter of S.Tape	Nominal Sheath Thickness	Approx overall Diameter	Approx Cable Weight	Max DC Resistance at 20°C	CURRENT RATING		
							Laid Direct In ground	Laid in Ducts	Laid in Free Air
NR x mm <sup>2</sup>	mm	mm	mm	mm	kg/km	ohm/km	A	A	A
2*6	0.7	0.20	1.8	15.4	415	3.080	71	60	68
2*10	0.7	0.20	1.8	17.2	550	1.830	92	80	87
2*18	0.7	0.20	1.8	19.8	725	1.150	120	98	115
2*25	0.9	0.20	1.8	22.8	1045	0.727	157	124	152
2*35	0.9	0.20	1.8	24.8	1305	0.524	187	154	183
3*6	0.7	0.20	1.8	16.1	485	3.080	64	51	55
3*10	0.7	0.20	1.8	18.1	655	1.830	84	69	75
3*16	0.7	0.20	1.8	20.1	885	1.150	109	87	98
3*25	0.9	0.20	1.8	24.1	1280	0.727	145	117	133
3*35	0.9	0.20	1.8	26.8	1630	0.524	174	139	159
3*10+6	0.7	0.20	1.8	18.9	735	1.83/3.08	84	69	75
3*16+10	0.7	0.20	1.8	21.3	1005	0.15/1.83	109	87	98
3*25+16	0.9/0.7	0.20	1.8	25	1495	0.727/1.15	145	117	133
3*35+16	0.9/0.7	0.20	1.8	27	1800	0.524/1.15	174	139	159
4*6	0.7	0.20	1.8	17.3	575	3.080	64	51	55
4*10	0.7	0.20	1.8	18.6	675	1.830	84	69	75
4*16	0.7	0.20	1.8	21.1	955	1.150	109	87	98
4*25	0.9	0.20	1.8	25.3	1435	0.727	145	117	133
4*35	0.9	0.20	1.8	27.9	1860	0.524	174	139	159
5*4	0.7	0.20	1.8	16.3	430	4.610	50	41	44
5*6	0.7	0.20	1.8	17.8	600	9.0800	64	51	55



## Multicore cable

For outdoor and indoor installations in damp and wet locations

Type	: CU / XLPE / SWA / PVC
Standard	: IEC 60502-1
Rated Voltage	: 0.6 / 1 KV
Conductor	: Soft annealed stranded copper wires
Insulation	: XLPE compound (or PVC or LSHF)
Bedding	: PVC compound (or LSHF or PE)
Armouring	: Steel Wires
Jacketing	: PVC compound (or LSHF or PE)

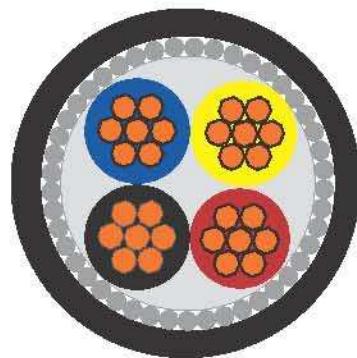

### TECHNICAL INFORMATION




Nominal Cross Section	Nominal Insulation Thickness	Nominal Diameter of S.Wire	Nominal Sheath Thickness	Approx overall Diameter	Approx Cable Weight	Max DC Resistance at 20°C	CURRENT RATING		
							Laid Direct In ground	Laid in Ducts	Laid in Free Air
NR x mm <sup>2</sup>	mm	mm	mm	mm	kg/km	ohm/km	A	A	A
2*1.5	0.7	0.9	1.8	13.3	345	12.100	35	30	29
2*2.5	0.7	0.9	1.8	14.2	595	7.410	43	39	39
2*4	0.7	0.9	1.8	15.2	470	4.610	58	48	53
2*6	0.7	0.9	1.8	16.4	555	3.080	73	62	68
2*10	0.7	0.9	1.8	18.2	700	1.830	95	82	89
2*16	0.7	0.9	1.8	20.2	905	1.150	122	98	118
2*25	0.9	1.80	1.8	25.1	1545	0.727	160	126	156
2*35	0.9	1.80	1.8	27.0	1845	0.524	192	158	187
3*1.5	0.7	0.9	1.8	18.8	385	12.100	31	28	26
3*2.5	0.7	0.9	1.8	14.7	485	7.410	41	35	37
3*4	0.7	0.9	1.8	15.9	525	4.610	52	43	47
3*6	0.7	0.9	1.8	17.1	685	3.080	66	54	57
3*10	0.7	0.9	1.8	19.1	826	1.830	87	71	77
3*16	0.7	0.9	1.8	21.3	1085	1.150	112	89	101
3*25	0.9	1.80	1.8	26.5	1825	0.727	148	121	138
3*35	0.9	1.80	1.8	28.6	2220	0.524	180	143	164
3*10+6	0.7	0.9	1.8	20.0	1000	1.83/3.08	87	71	77
3*16+10	0.7	1.80	1.8	22.2	1205	1.15/1.83	112	89	101
3*25+16	0.9/0.7	1.80	1.8	27.4	1920	727/1.15	148	121	138
3*35+16	0.9/0.7	1.80	1.8	29.13	2485	24/1.15	180	143	164
4*1.5	0.7	0.9	1.8	14.8	420	12.100	31	28	26
4*2.5	0.7	0.9	1.8	15.8	495	7.410	41	35	37
4*4	0.7	0.9	1.8	16.19	605	4.610	52	43	47
4*6	0.7	0.9	1.8	18.13	735	3.080	66	54	57
4*10	0.7	0.9	1.8	20.5	985	1.830	87	71	77
4*16	0.7	1.80	1.8	24.13	1505	1.150	112	89	101
4*25	0.9	1.80	1.8	28.5	2075	0.727	148	121	138
4*35	0.9	1.80	1.8	31.3	2670	0.524	180	143	164
5*1.5	0.7	0.9	1.8	15.4	450	12.100	31	28	26
5*2.5	0.7	0.9	1.8	16.6	535	7.410	41	35	37
5*4	0.7	0.9	1.8	18.1	700	4.610	52	43	47
5*6	0.7	0.9	1.8	19.6	855	3.080	66	54	57

## Multicore cable

For outdoor and indoor installations in damp and wet locations

Type	: CU / XLPE / PVC
Standard	: IEC 60502-1
Rated Voltage	: 0.6 / 1 KV
Conductor	: Soft annealed stranded copper wires
Insulation	: XLPE compound (or PVC)
Bedding	: PVC compound (LSHF or PE)
Jacketing	: PVC compound (LSHF or PE)

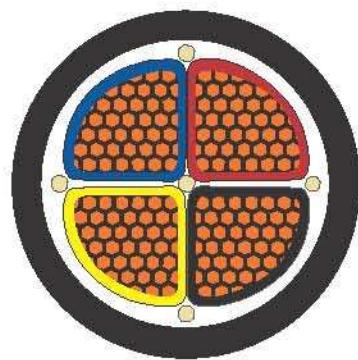

## TECHNICAL INFORMATION


Nominal Cross Section	Nominal Insulation Thickness	Nominal Sheath Thickness	Approx overall Diameter	Approx Cable Weight	Max DC Resistance at 20°C	CURRENT RATING		
						Laid Direct In ground	Laid In Ducts	Laid In Free Air
3*50+25	1.0/0.9	1.8	25.8	1845	0.3870/0.727	211	170	199
3*70+35	1.1/0.9	1.9	29.6	2585	0.268/0.524	251	211	240
3*95+50	1.1/1.0	2.1	33.5	3485	0.1930/0.387	302	248	288
3*120+70	1.2/1.1	2.2	37.4	4385	0.153/0.288	348	287	345
3*150+70	1.4/1.1	2.3	41.2	5280	0.124/0.288	382	322	392
3*185+95	1.6/1.1	2.5	46.1	6845	0.0991/0.98	428	363	450
3*240+120	1.7/1.2	2.7	51.8	8810	0.0754/0.153	496	427	538
3*300+160	1.8/1.4	2.9	56.9	10720	0.0601/0.124	559	474	626
3*400+185	2.0/1.6	3.1	64.8	13835	0.0470/0.0991	638	544	720
3*500+240	2.2/1.7	3.3	71.8	17115	0.0396/0.0754	718	620	819
4*50	1.0	1.8	27	2010	0.387	211	170	199
4*70	1.1	2.0	31.3	2850	0.268	251	211	240
4*95	1.1	2.1	34.6	3885	0.193	302	248	288
4*120	1.2	2.3	39.6	4905	0.153	348	287	345
4*150	1.4	2.4	43.6	5055	0.124	382	322	392
4*185	1.6	2.6	48.6	7495	0.0991	428	363	440
4*240	1.7	2.8	54.4	9785	0.0754	496	427	538
4*300	1.8	3.0	60.0	12205	0.0601	559	474	626
4*400	2.0	3.3	66.6	155540	0.0470	638	544	720
4*500	2.2	3.5	76.2	19415	0.0386	718	620	819



## Multicore cable

For outdoor and indoor installations in damp and wet locations

Type	: CU / XLPE / STA/ PVC
Standard	: IEC 60502-1
Rated Voltage	: 0.6/1 KV
Conductor	: Soft annealed stranded copper wires
Insulation	: XLPE compound (or PVC)
Bedding	: PVC compound (or LSHF or PE)
Armouring	: Steel Tape (or LSHF or PE)
Jacketing	: PVC compound

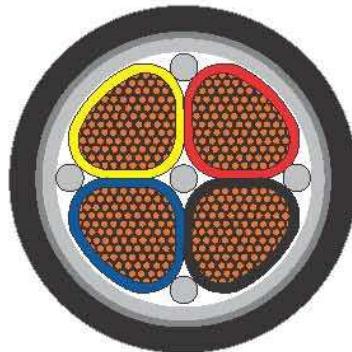

## TECHNICAL INFORMATION




Nominal Cross NR x mm <sup>2</sup>	Nominal Insulation Thickness	Nominal Diameter of S. Tape	Nominal Sheath Thickness	Approx overall Diameter	Approx Cable Weight	Max DC Resistance at 20°C	CURRENT RATING		
							Laid Direct in ground	Laid in Ducts	Laid in Free Air
3*50+25	1.0/0.9	0.20	1.9	28.8	2145	0.387/0.727	211	170	199
3*70+35	1.1/0.9	0.20	2.0	33.0	2945	0.268/0.524	251	211	240
3*95+50	1.1/1.0	0.20	2.2	38.1	4255	0.193/0.387	302	246	298
3*120+70	1.2/1.1	0.50	2.3	42.0	5240	0.153/0.268	348	287	345
3*150+70	1.4/1.1	0.50	2.4	46.2	6280	0.124/0.268	382	322	392
3*185+95	1.6/1.1	0.50	2.6	51.1	7750	0.0991/0.193	428	383	450
3*240+120	1.7/1.2	0.50	2.8	57	9905	0.0754/0.153	496	427	538
3*300+150	1.8/1.4	0.50	3.0	62.3	12140	0.0607/0.124	559	474	626
3*400+185	2.0/1.6	0.50	3.2	70.0	15090	0.0475/0.0991	638	544	720
3*500+240	2.2/1.7	0.50	3.2	77.2	18855	0.0366	718	620	819
4*50	1.0	0.20	1.9	30.0	2375	0.3870	211	170	199
4*70	1.1	0.20	2.1	34.7	3270	0.2680	251	211	240
4*95	1.1	0.50	2.2	39.6	4705	0.1930	302	246	298
4*120	1.2	0.50	2.4	43.7	5805	0.1530	348	287	345
4*150	1.4	0.50	2.6	48.8	7125	0.1240	382	322	392
4*185	1.6	0.50	2.7	53.6	8650	0.0991	428	363	450
4*240	1.7	0.50	2.9	60.2	11190	0.0754	496	427	538
4*300	1.8	0.50	3.1	66.4	13720	0.0601	559	474	626
4*400	2.0	0.50	3.4	74.8	17280	0.0470	638	544	720
4*500	2.2	0.50	3.7	82.2	21330	0.036	718	620	816

## Multicore cable

For outdoor and indoor installations in damp and wet locations

Type	: CU / XLPE / SWA / PVC
Standard	: IEC 60502-1
Rated Voltage	: 0.6 / 1 KV
Conductor	: Soft annealed stranded copper wires
Insulation	: XLPE compound (or PVC or LSHF)
Bedding	: PVC compound (or LSHF or PE)
Armouring	: Steel Wires
Jacketing	: PVC compound (or LSHF or PE)

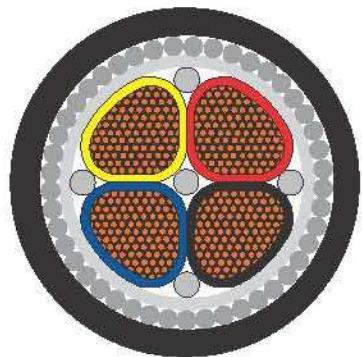

## TECHNICAL INFORMATION


Nominal Cross	Nominal Insulation	Nominal Diameter of S.Wire	Nominal Sheath Thickness	Approx overall Diameter	Approx Cable Weight	Max DC Resistance at 20°C	CURRENT RATING		
							Laid Direct In ground	Laid In Ducts	Laid In Free Air
3*50+25	1.0/0.9	1.6	1.9	31.6	2805	0.387/0.727	211	170	205
3*70+35	1.1/0.9	2.00	2.1	36.4	3950	0.268/0.524	261	211	246
3*95+50	1.1/1.0	2.00	2.2	40.1	5000	0.193/0.387	302	246	304
3*120+70	1.2/1.1	2.0	2.3	44.0	6115	0.153/0.288	348	287	351
3*150+70	1.4/1.1	2.50	2.5	49.4	7690	0.124/0.288	382	322	398
3*185+95	1.6/1.1	2.50	2.7	54.6	9285	0.0991/0.193	428	363	456
3*240+120	1.7/1.2	2.50	2.9	60.2	11600	0.0754/0.163	496	427	544
3*300+150	1.9/1.4	2.50	3.0	65.3	13940	0.0601/0.124	559	474	632
3*400+185	2.0/1.6	3.15	3.4	76.1	18370	0.0470/0.0991	638	544	725
3*500+240	2.2/1.7	3.15	3.6	82.3	22150	0.0366/0.0754	718	620	825
4*50	1.0	1.60	2.0	32.8	3035	0.3870	211	170	205
4*70	1.1	2.00	2.2	38.1	4315	0.2680	261	211	246
4*95	1.1	2.00	2.3	41.8	5530	0.1930	302	246	304
4*120	1.2	2.50	2.5	46.9	71112	0.1530	348	287	351
4*150	1.4	2.50	2.6	51.8	8555	0.1240	382	322	398
4*185	1.6	2.50	2.8	56.8	10250	0.0991	428	363	456
4*240	1.7	2.50	3.0	63.0	12945	0.0754	496	427	544
4*300	1.8	2.50	3.2	68.6	15875	0.0601	559	474	632
4*400	2.0	3.15	3.5	79.3	20630	0.0470	638	544	725
4*500	2.2	3.15	3.8	87.1	25120	0.0366	718	620	825



## Multicore cable

For outdoor and indoor installations in damp and wet locations

Type	: AL / XLPE / PVC
Standard	: IEC 60502-1
Rated Voltage	: 0.6 / 1 KV
Conductor	: Drawn Aluminum wires
Insulation	: XLPE compound (or PVC or LSHF)
Bedding	: PVC compound (or LSHF or PE)
Armouring	: Steel Wires
Jacketing	: PVC compound (or LSHF or PE)

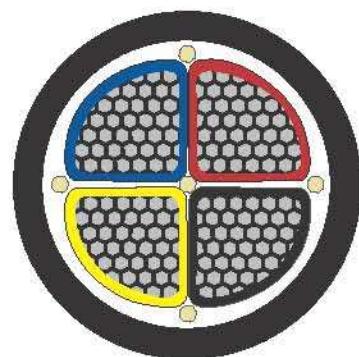

### TECHNICAL INFORMATION




Nominal Cross Section	Nominal Insulation Thickness	Nominal Sheath Thickness	Approx overall Diameter	Approx. Cable Weight	Max DC Resistance at 20°C	CURRENT RATING		
						Laid Direct In ground	Laid in Ducts	Laid in Free Air
NR x mm <sup>2</sup>	mm	mm	mm	kg/km	ohm/km	A	A	A
3*50+25	1.0/0.9	1.8	25.8	805	0.841/1.20	185	129	152
3*70+35	1.1/0.9	1.9	29.6	1105	0.443/0.868	200	164	187
3*95+50	1.1/1.0	2.1	33.5	1425	0.320/0.641	239	193	228
3*120+70	1.2/1.1	2.2	37.8	1795	0.253/0.443	268	222	263
3*150+70	1.4/1.1	2.3	41.9	2300	0.208/0.443	302	252	310
3*185+95	1.6/1.1	2.5	46.1	2670	0.164/0.320	331	281	351
3*240+120	1.7/1.2	2.7	51.6	3395	0.125/0.253	388	328	421
3*300+150	1.8/1.4	2.8	57.1	4175	0.100/0.206	445	369	497
3*400+185	2.0/1.6	3.1	65.0	5300	0.0778/0.164	513	433	573
3*500+240	2.2/1.7	3.4	71.8	7220	0.0605/0.125	581	497	655
4*50	1.0	1.8	27.0	860	0.6410	185	129	152
4*70	1.1	2.0	31.3	1100	0.4430	200	164	187
4*95	1.1	2.1	35.0	1565	0.3200	239	193	228
4*120	1.2	2.3	39.5	2020	0.2530	268	222	263
4*150	1.4	2.4	43.6	2470	0.2060	302	252	310
4*185	1.6	2.5	48.4	2965	0.1640	331	281	351
4*240	1.7	2.8	54.4	3825	0.1250	388	328	421
4*300	1.8	3.0	60.0	4685	0.1000	445	369	497
4*400	2.0	3.3	72.2	6260	0.0778	513	433	573
4*500	2.2	3.6	76.5	7615	0.0605	581	497	655

## Multicore cable

For outdoor and indoor installations in damp and wet locations

Type	: AL / XLPE /STA/ PVC
Standard	: IEC 60502-1
Rated Voltage	: 0.6/1 KV
Conductor	: Drawn Aluminum Wires
Insulation	: XLPE compound (or PVC or LSHF)
Bedding	: PVC compound (or LSHF or PE)
Jacketing	: PVC compound (or LSHF or PE)

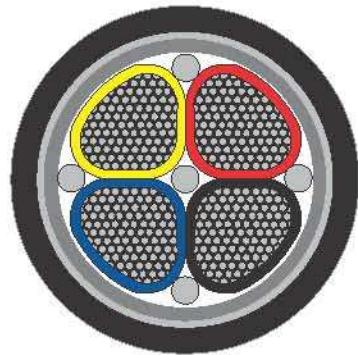

## TECHNICAL INFORMATION


Nominal Cross Section	Nominal Insulation Thickness	Nominal Diameter of S.Tape	Nominal Sheath Thickness	Approx overall Diameter	Approx Cable Weight	Max DC Resistance at 20°C	CURRENT RATING		
							Laid Direct In ground	Laid In Ducts	Laid In Free Air
NR x mm <sup>2</sup>	mm	mm	mm	mm	kg/km	ohm/km	A	A	A
3*50	1.0	0.20	0.20	27.0	1000	0.641	165	129	152
3*70	1.1	0.20	0.20	30.4	1210	0.443	200	164	187
3*95	1.1	0.20	0.20	34.2	1650	0.320	239	193	228
3*120	1.2	0.50	0.50	38.8	2340	0.253	268	222	263
3*150	1.4	0.50	0.50	42.5	2770	0.208	302	262	310
3*185	1.6	0.50	0.50	47.2	3350	0.1640	331	281	351
3*240	1.7	0.50	0.50	52.2	4280	0.1250	388	328	421
3*300	1.8	0.50	0.50	57.6	5020	0.1000	445	369	497
3*400	2.0	0.50	0.50	64.4	6230	0.0778	513	433	573
3*500	2.2	0.50	0.50	71.0	7540	0.0605	581	497	655
3*60+25	1.0/0.9	0.20	0.20	29.5	1200	0.641/1.20	165	129	152
3*70+35	1.1/0.9	0.20	0.20	33.5	1500	0.443/0.868	200	164	187
3*95+50	1.1/1.0	0.50	0.50	38.3	1970	0.320/0.641	239	193	228
3*120+70	1.2/1.1	0.50	0.50	42.2	2710	0.253/0.443	268	222	263
3*150+70	1.4/1.1	0.50	0.50	46.7	3180	0.208/0.443	302	262	310
3*185+95	1.6/1.1	0.50	0.50	51.4	3530	0.164/0.320	331	281	361
3*240+120	1.7/1.2	0.50	0.50	57.0	4600	0.125/0.253	388	328	421
3*300+150	1.8/1.4	0.50	0.50	62.8	5820	0.100/0.208	445	369	497
3*400+185	2.0/1.6	0.50	0.50	70.4	7200	0.0778/0.164	513	433	573
3*500+240	2.0/1.7	0.50	0.50	77.0	9040	0.0605/0.125	581	497	655
4*60	1.0	0.20	0.20	30.4	1210	0.6410	165	129	152
4*70	1.1	0.20	0.20	34.7	1595	0.4430	200	164	187
4*95	1.1	0.50	0.50	40.4	2540	0.3200	239	193	228
4*120	1.2	0.50	0.50	43.8	3020	0.2530	268	222	263
4*150	1.4	0.50	0.50	49.0	3670	0.2080	302	252	310
4*185	1.6	0.50	0.50	53.6	4380	0.1640	331	281	351
4*240	1.7	0.50	0.50	60.0	4430	0.1250	388	328	421
4*300	1.8	0.50	0.50	66.4	6125	0.1000	445	369	497
4*400	2.0	0.50	0.50	73.8	7560	0.0778	513	433	573
4*500	2.3	0.50	0.50	81.6	9990	0.0605	581	497	655



## Multicore cable

For outdoor and indoor installations in damp and wet locations

Type	: AL / XLPE / SWA / PVC
Standard	: IEC 60502-1
Rated Voltage	: 0.6/1 KV
Conductor	: Drawn Aluminum Wires
Insulation	: XLPE compound (or PVC or LSHF)
Bedding	: PVC compound (or LSHF or PE)
Armouring	: Steel Tape
Jacketing	: PVC compound (or LSHF or PE)

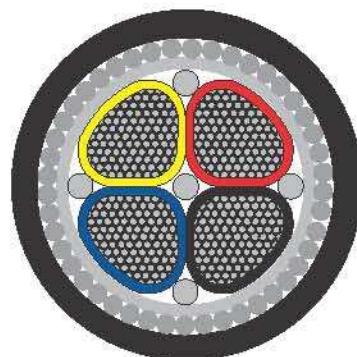

### Technical Information



Nominal Cross Section	Nominal Insulation Thickness	Nominal Diameter of S.Wire	Nominal Sheath Thickness	Approx overall Diameter	Approx Cable Weight	Max DC Resistance at 20°C	CURRENT RATING		
							Laid Direct In ground	Laid In Ducts	Laid In Free Air
NR x mm <sup>2</sup>	mm	mm	mm	mm	kg/km	ohm/km	A	A	A
3*50+25	1.0/0.9	2.00	1.9	31.6	1870	0.841/1.20	165	129	158
3*70+36	1.1/0.9	2.00	2.1	36.8	2500	0.443/0.888	200	164	193
3*95+50	1.1/1.0	2.00	2.2	40.1	2955	0.320/0.641	239	193	234
3*120+70	1.2/1.1	2.50	2.3	44.2	3690	0.253/0.443	268	222	269
3*150+70	1.4/1.1	2.50	2.5	49.8	4625	0.206/0.443	302	252	316
3*185+95	1.6/1.1	2.50	2.7	55.0	5330	0.164/0.320	331	281	357
3*240+120	1.7/1.2	2.50	2.9	60.8	6445	0.125/0.253	388	328	427
3*300+150	1.8/1.4	2.50	3.0	65.3	7400	0.100/0.206	445	369	503
3*400+185	2.0/1.6	3.15	3.3	73.4	9450	0.0778/0.164	513	433	579
3*600+240	2.2/1.7	3.15	3.8	81.6	12270	0.0605/0.125	581	497	661
4*50	1.0	1.80	2.0	32.6	1880	0.6410	165	129	158
4*70	1.1	2.0	2.2	38.1	2860	0.4430	200	164	193
4*95	1.1	2.00	2.3	41.8	3170	0.3200	239	193	234
4*120	1.2	2.50	2.5	46.9	4195	0.2530	268	222	269
4*150	1.4	2.50	2.6	51.8	4915	0.2060	302	252	316
4*185	1.6	2.50	2.8	56.8	6750	0.1640	331	281	357
4*240	1.7	2.50	3.0	63.0	8980	0.1250	388	328	427
4*300	1.8	2.50	3.2	68.8	8155	0.1000	445	369	503
4*400	2.0	3.15	3.6	80.5	11315	0.0778	513	433	579
4*500	2.2	3.15	3.7	86.9	13025	0.0605	581	497	661

## Conversion Table


<b>Multiply</b>	<b>by</b>	<b>to obtain</b>	<b>Multiply</b>	<b>by</b>	<b>to obtain</b>
<b>WEIGHT - Imperial</b>			<b>LENGTH - Imperial</b>		
Ounces	28.3495	grams	Mils	0.001	inches
Pounds (Av)	453.59	grams	Mils	0.0254	millimeters
Pounds (Av)	0.45359	kilograms	Inches	1000	mils
Tons (short)	907.19	kilograms	Inches	25.40	millimeters
Tons (long)	1016.05	kilograms	Inches	2.54	centimeters
<b>WEIGHT - Metric</b>			Feet	30.48	centimeters
Grams	0.03527	ounces	Feet	0.3048	meters
Grams	0.002205	pounds	Feet (thousands of)	0.3048	kilometers
Kilograms	35.274	ounces	Yards	0.9144	meters
Kilograms	2.2046	pounds	Mils	1.6093	kilometers
Kilograms	0.001102	tons (short)	<b>LENGTH - Imperial</b>		
Kilograms	0.0009842	tons (long)	Millimeters	39.37	mils
<b>MISCELLANEOUS - Imperial</b>			Millimeters	0.03937	inches
Pounds per 1000 feet	1.48816	kilograms per kilometer	Centimeters	0.3937	inches
Pounds per mile	0.28185	kilograms per kilometer	Centimeters	0.032808	feet
Pounds per square inch	0.0007031	kilograms per square millimeter	Meters	39.37	inches
Pounds per square inch	0.07031	kilograms per square centimeter	Meters	3.2808	feet
Feet per second	18.288	meters per minute	Meters	1.0936	yards
Feet per second	1.09728	kilometers per hour	Kilometers	3280.83	feet
Miles per hour	1.60935	kilometers per hour	Kilometers	0.62137	mils
Ohms per 1000 feet	3.28083	ohms per kilometer	<b>AREA - Imperial</b>		
Ohms per mile	0.62137	ohms per kilometer	Square mils	1.2732	circular mills
Decibels per 1000 feet	3.28083	decibels per kilometer	Square mils	0.000001	square inches
Decibels per mile	0.62137	decibels per kilometer	Circular mils	0.7854	square mils
Decibels	0.1153	nepers	Circular mils	0.0000007854	square inches
<b>MISCELLANEOUS - Metric</b>			Circular mils	0.00050657	square millimeters
Kilograms per kilometer	0.67197	pounds per 1000 feet	Square inches	1000000	square mils
Kilograms per kilometer	3.54795	pounds per mile	Square inches	1273240	circular mils
Kilograms per square millimeter	1422.34	pounds per square inch	Square inches	645.16	square millimeters
Kilograms per square centimeter	14.2234	pounds per square inch	Square inches	6.4516	square centimeters
Grams per cubic cm	0.03613	pounds per cubic inch	Square inches	0.09290	square meters
Meters per minute	0.05468	feet per second	Square inches	0.8361	square meters
Kilometer per hour	0.91134	feet per second	<b>AREA - Metric</b>		
Kilometer per hour	0.62137	miles per hour	Square millimeters	1973.52	circular mills
Ohms per kilometer	0.3048	ohms per 1000 feet	Square millimeters	0.00155	square inches
Ohms per kilometer	1.6093	ohms per mile	Square centimeters	0.155	square inches
Decibels per kilometer	0.3048	decibels per 1000 feet	Square meters	10.7638	square feet
Decibels per kilometer	1.6093	decibels per mile	Square meters	1.19599	square yards
<b>TEMPERATURE</b>			<b>VOLUME - Imperial</b>		
°Fahrenheit	5/9 (°F)-32	°Celsius	Cubic inches	16.38716	cubic centimeters
°Celsius	9/5 (°C) + 32	°Fahrenheit	Cubic feet	0.028317	cubic meters
<b>VOLUME - U.S.</b>			Quarts (liquid)	0.9463	cubic centimeters
			Gallons	3.7854	cubic meters
<b>VOLUME - Metric</b>			Cubic centimeters	0.06102	cubic inches
			Cubic meters	35.3145	cubic feet
			Litres	1.05668	quarts (Liquid U.S.)
			Litres	0.26417	gallons (U.S.)

## Packing

International practice is to supply cables on wooden drums or as appropriate plastic spools. At the customers request we will also supply steel drums for improved on-site performance & handling.

The finished drums may be - when requested by our customer - closed with a continuous lagging with a wood having approximate thickness 2.00 mm.

### Drum Dimensions:

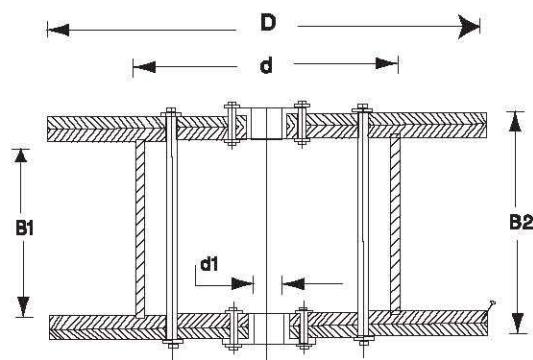

D	d	d1	B1	B2
600	300	85	450	580
700	350	85	530	660
800	400	85	530	660
900	450	85	630	760
1000	500	85	630	772
1100	550	85	630	772
1200	600	85	850	992
1300	650	85	850	992
1400	700	85	850	992
1500	750	110	850	1020
1600	800	110	850	1020
1700	850	110	850	1020
1800	900	110	850	1032
1900	950	110	850	1032
2000	1000	110	980	1174
2100	1050	110	980	1174
2200	1100	110	1230	1274
2300	1150	110	1280	1432
2400	1200	110	1280	1482
2500	1250	110	1280	1482
2600	1300	110	1280	1432
2700	1350	110	1280	1482
2800	1400	110	1280	1482
2900	1450	110	1280	1482
3000	1500	110	1280	1482

### Legend

- D = Flange Diameter (mm)
- d = Barrel Diameter (mm)
- d1 = Benz hole diameter (mm)
- B1 = Distance between flanges (mm)
- B2 = Overall Width (mm)



## Selection Form: Low Voltage

This form needs to be filled in order to help Jeddah Cables Company prepare the right quotation:

**Jeddah Cables  
COMPANY**

A Company of Energya Cables Saudi Arabia

### Standard & Specification

- IEC
- BS
- Others: \_\_\_\_\_

### Conductor

- Type
  - Copper
  - Aluminum
- Size (mm<sup>2</sup>): \_\_\_\_\_
- Shape
  - Round Circular
  - Round Compacted
  - Compacted Sectoral
- Number of Cores: \_\_\_\_\_

### Insulation Type

- PVC
- XLPE
- Low Smoke Halogen Free (LSHF)

### Armoring Type (If Any)

- Single Core Cables:
  - Al Wire Armor (AWA)
  - Double Al Tape Armor (ATA)
- Multi Core Cables:
  - Steel Wire Armor (SWA)
  - Double Steel Tape Armor (STA)

### Jacket Type

- PVC
- PE
- Low Smoke Halogen Free (LSHF)

### Special Requirements \_\_\_\_\_

---

---

P.O. Box 31248 Jeddah 21497, Kingdom of Saudi Arabia  
Tel. +966 2 636 0770 • Fax: +966 2 636 4695  
Email: [info@cables.energya.com](mailto:info@cables.energya.com) • web: <http://www.cables.energya.com>