


ROLL-TECH

ROLLING SHUTTERS

RESIDENTIAL . COMMERCIAL . INDUSTRIAL

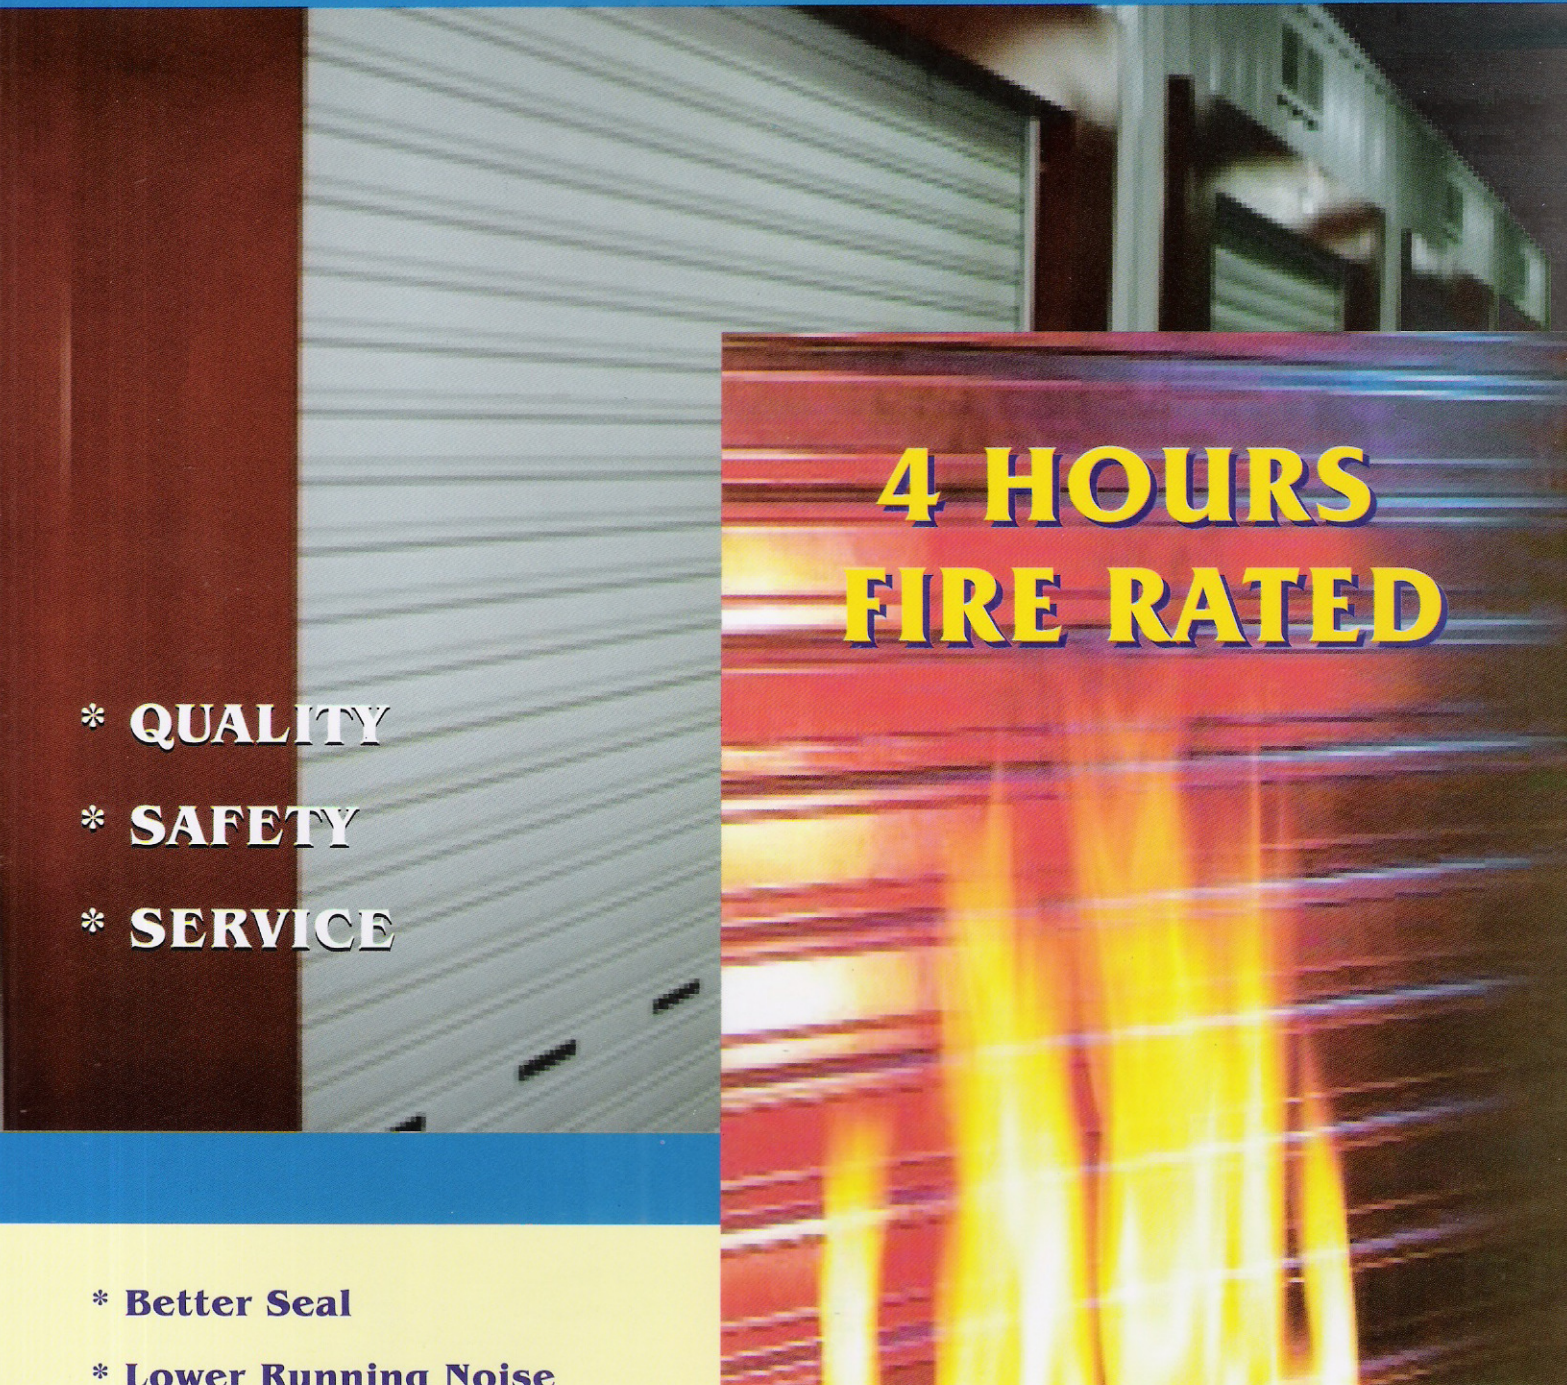

**4 HOURS
FIRE RATED**

- * **QUALITY**
- * **SAFETY**
- * **SERVICE**

- * **Better Seal**
- * **Lower Running Noise**
- * **Manual / Electrical**
- * **European operator**

ADVANTAGES

- Quick Delivery
- Quality & Reliability
- Guaranteed Spare
- Perfect Installations
- After Sale Service

A cost effective solution to meet all the requirements of a better Rolling Shutter for Garage and Industrial application, whether it is aluminium or steel, manually or electrically operated, from the right source - **Middle East Insulation LLC.**

A door system which is completely tailor-made to meet the correct specifications and requirements of the customers.




Steel / Aluminium

Extruded Aluminium slat



Slat with Ventilation

Insulated Slat

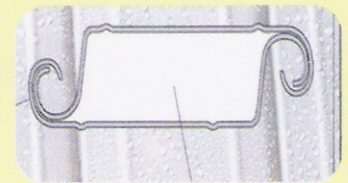

TECHNICAL SPECIFICATIONS

SI No.	Description	Details
1	Door size	Minimum 2000 x 1500mm (WxH) Maximum 5000 x 5000mm (WxH)
2	Slat size	G.I 0.7 and 0.9mm Alum. 1.0mm
3	Seal	Better EPDM bottom and side seal for weather tightness same type of overhead door seal.
4	Finish	Power coated in standard RAL color or polyester prepainted original coil.
5	Hardware	Torsion springs, chain hoist from Holland.
6	Operator	Hi-tech operator- tubular, center and side operators from Europe with safety features, remote push button control options.


Optional:

- * Electrically operated with push button switch
- * Electrically operated with manual crank override
- * Electrically with wireless remote control
- * Manual with chain hoist, security lock, and manual crank operations


DURABLE, QUITE, SAFE AND ECONOMICAL

- Slats are produced under ISO 9001-2000 quality procedure meeting all international standards.
- Technologically advanced hardware, accessories from the world renowned manufacturers in EUROPE.
- Hi-tech operators with safety features from EUROPE.

EUROPEAN OPERATORS

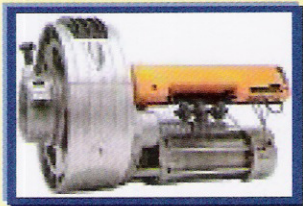

Central Motor

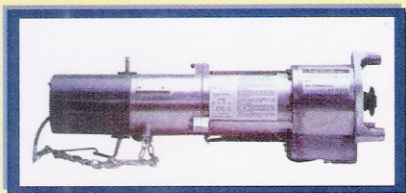

Side Motor with Chain Host



Tubular Motor

- Available various type of shaft and drum
- Modular installation without additional adjustments
- Possibility to add a second motor, which allows an increase in force for larger sized doors
- Complete bracket set available
- Option for manual operation
- 3 Phase / 1 Phase available
- Provided emergency hand chain Brake releasing string
- Option for manual operation
- Tubular motor for rolling shutter, blind and sun awning
- Slim, Powerful and Silent
- Maintenance free and permanently lubricated
- Easy limit switch adjustments
- Fully braking power in the event of a power failure
- Manual crank operations from outside


BAAB SECTIONAL OVERHEAD GARAGE & INDUSTRIAL DOOR



50mm Polyurethane insulated aluminium or steel panel are produced under ISO 9001-2000 quality procedure meeting all International standards.

Technologically advanced hardware from the world renowned manufactures in EUROPE.

Hi-tech operators with safety features from GERMANY with remote control.

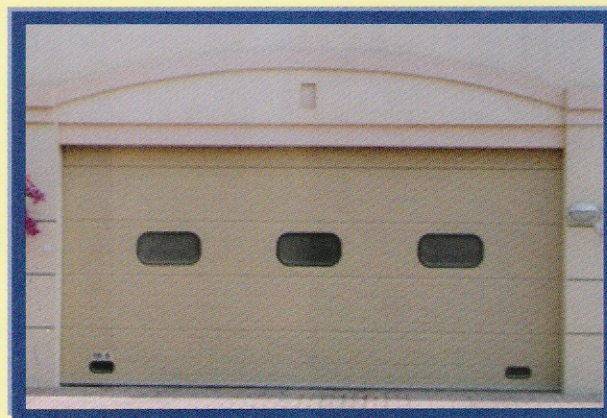

ROLLER SHUTTER - EUROPEAN MAKE

IRSP INSULATED
ROLLER SHUTTER
PRODUCTS

1. **Fire Roller Shutter - 240 Minutes - BRE Test Report number 224355**
2. **Insulated Roller Shutter - High Density Insulated Foam**
3. **Speed Roller Shutter - Fast Action Insulated Roller Shutter**
4. **Security Roller Shutter - Anti cut through Insulated Roller Shutter**

QUICK ACTION ROLLER DOOR-PVC




Innovative solution for exterior and interior areas. Open upto 2m/sec.

Energy-Saving Quick action roller door for internal and external doors

- Steel winding shaft
- Bottom beams aluminium with safety edge
- Safety photocell
- Vision Section

OTHER PRODUCTS

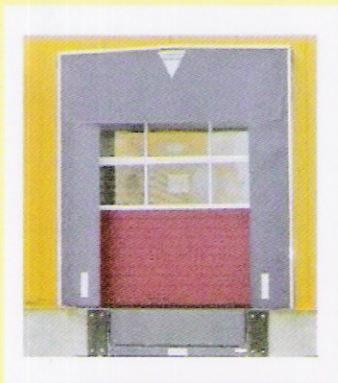

Dock Shelter



Dock Leveller



Overhead Door

SERVICE - 050 5518356



الشرق الأوسط للعوازل ذ.م.م.

Middle East Insulation LLC

P.O. Box :14225, DUBAI - UNITED ARAB EMIRATES

Tel. : +971 4 8801600 Fax : +971 4 8801700

Email : baab@mei-uae.com, Website : www.mei-uae.com

