


# Wireless Audio Receivers

FOR ALL 770 SERIES CONSOLES

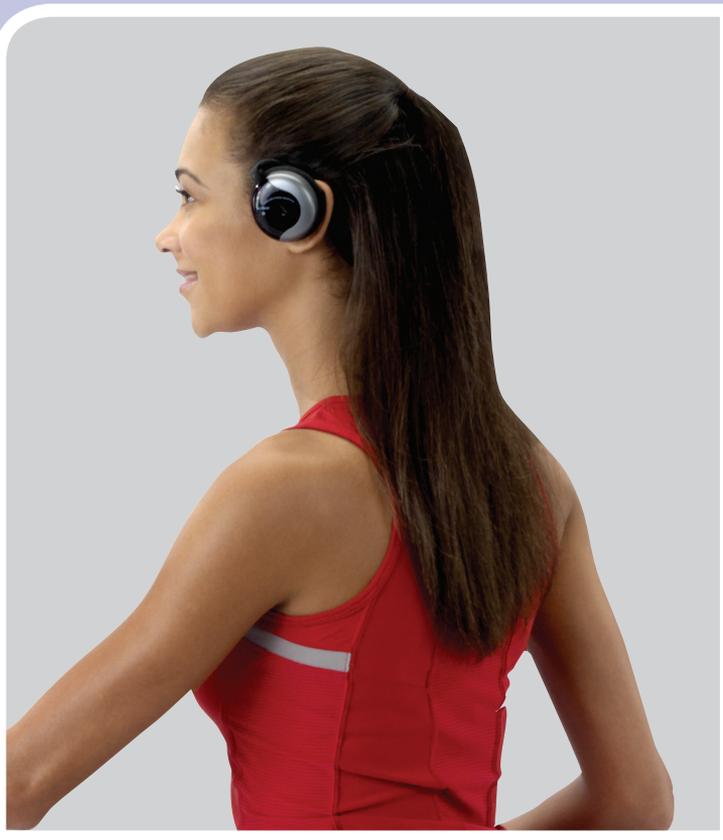

## 900 MHz Receiver Specifications

<b>900 MHz Frequency Range</b>	903.000 TO 926.0000 MHz
<b>FM Frequency Range (US)</b>	87.5 to 107.9 MHz (US)
<b>Input Sensitivity (20 dB SINAD)</b>	-85 dBm typical
<b>Modulation</b>	FM Stereo deviation +/- 75KHz
<b>Stereo Separation</b>	> 25dB
<b>Equalization</b>	Standard / Boost
<b>Audio Frequency Response</b>	20 Hz to 18 KHz
<b>Frequency Entry</b>	Scroll up/down
<b>Power</b>	4.6 VDC TO +12VDC

## 800 MHz Receiver Specifications

<b>900 MHz Frequency Range</b>	863.05 TO 864.8 MHz
<b>FM Frequency Range (US)</b>	87.5 to 107.9 MHz (US)
<b>Input Sensitivity (20 dB SINAD)</b>	-85 dBm typical
<b>Modulation</b>	FM Stereo deviation +/- 60 KHz
<b>Stereo Separation</b>	>25dB
<b>Equalization</b>	Standard / Boost
<b>Audio Frequency Response</b>	20 Hz to 18 KHz
<b>Frequency Entry</b>	Scroll up/down
<b>Power</b>	4.6 VDC TO +12VDC

### 900 MHz RECEIVERS

#### Receivers available in the following frequencies:

- 900 MHz with built in FM receiver

#### Receiver specifications:

- Embedded inside the console – nothing to wear out!
- Static free audio
- Industry leading 3 year warranty
- Max # of channels : 37
- Compatible with the most popular transmitters, including Cardio Theater, Broadcast Vision / BVE, MYE entertainment, Exercise, Audeon

### 800 MHz RECEIVERS

#### Receivers available in the following frequencies:

- 800 MHz with built in FM receiver

#### Receiver specifications:

- Embedded inside the console – nothing to wear out!
- Static free audio
- Industry leading 3 year warranty
- Max # of channels : 13
- Compatible with the most popular transmitters, including Cardio Theater, Broadcast Vision / BVE, MYE entertainment, Exercise, Audeon