

Transgulf Cement Products LL.C. **عبر الخليج** للمنتجات الإسمنتية ذمم.

PRODUCTS
PAVERS

About us

Founded in 1996, Transgulf Cement Products is one of the leading suppliers of concrete products in the GCC region. Strategically located in the Jebel Ali Industrial Area, we cater to the product requirements of a range of clientele, having built up a solid, unshakeable reputation in the industry over the last decade. Constant innovation and exceptional customer service lie at the heart of our company values, and these founding principles have marked every venture of Transgulf, making us one of the leading names for concrete products in the region.

Symbolic of our founding principles, our products serve to strengthen, enhance and toughen the landscape where they are applied. Equipped with state-of-the-art technology, our plant operates with seamless efficiency and productivity, 24 hours a day. In addition, we take pride in our in-house research and development wing, where our experts are committed to the development of innovations in engineering and manufacturing processes to make our products one of the best in the industry.

At Transgulf Cement Products, our first commitment is to provide quality products through prompt delivery, followed by active involvement until project completion. Our consultancy team of experienced professionals are always ready to povide you with valuable assistance in selecting a product, pattern, colour or design. Our efficient after-sales service team makes regular visits to construction sites to ensure smooth co-ordination between project requirements and product supply. Our growing list of clients stands testament to Transgulf's standards of quality and excellence.

Our wide range of concrete products are available in a multitude of colours, patterns and designs to suit all types of architectural projects. For over a decade, we have been providing clients quality products for their every need. No matter what your requirements - be it a villa or building complex, a warehouse or public park - our team of experienced professionals will provide you with all the assistance needed in making the right selection for your particular requirements.

"Two values lie at the heart of Transgulf's operations in the UAE: exceptional customer service and constant innovation. These founding principles, which have guided us from the beginning, have been the key to our success."

Board of Directors



PAVERS

Economical and ubiquitous, the unipaver is one of our most popular paving solutions. The unipaver is most renowned for its superior locking strength. It's serrated edges ensure that each block fits snugly against the next, creating an interlocked pattern capable of taking on enormous loads. The inherent shape of the paver, with its two axis upon which concentrated loads can be placed, results in a uniform distribution of weight and an optimal release of tension. This explains the uni's outstanding durability, and why it is commonly used for covering large areas that witness heavy vehicular and pedestrian traffic.

Another reason for its popularity is that it remains unaffected by changes in season, be it scorching summers or biting winters, and requires no extra maintenance. The unipaver can be laid in various patterns such as the stretcherboard, basket weave or herringbone. The unistarter shape is used in tandem with unipaver to create straight edges.



Table of contents

1.1	Sienna®
1.2	La Lenia
1.3	Viva Classico®
1.4	Flair®
1.5	Rusto®
1.6	Antique®
1.7	Amwaj®
1.8	Aura®
1.9	Venus [®]
1.10	Ladana®
1.11	Square®
1.12	La Plaza®
1.13	Octapave
1.14	Uni Paver
1.15	Behaton
1.16	Honeycomb®
1.17	Monaco
1.18	Rectangular®
1.19	Grasscrete
1.20	La Rambla®





Item	Sienna							
Length(mm)	1	60	1	60	240		240/160/120	
Width(mm)	1:	20	160 160		160			
Thickness(mm)	60	80	60	80	60	80	60	80
Weight of block (kg)	2.7	3.6	3.6	4.9	5.5	7.3	5.5/3.6/2.7	7.3/4.9/3.6
Blocks /m²	52	52	39	39	26	26	36.48	36.48
Blocks/bundle	540	540	378	378	270	270	378	378
Square meter/bundle	10.36	10.36	9.67	9.67	10.36	10.36	10.36	10.36






Item					
Length(mm)	120	120	240	240	320
Width(mm)	80	120	120	240	240
Thickness(mm)	80	80	80	80	80
Weight of block (kg)	1.85	2.76	5.5	11	14.7
Blocks / m ²	104.25	69.5	34.73	17.36	13
Blocks/bundle	1008	720	360	135	108
Square meter/bundle	9.67	10.36	10.36	7.77	8.29



PAVERS La Lenia

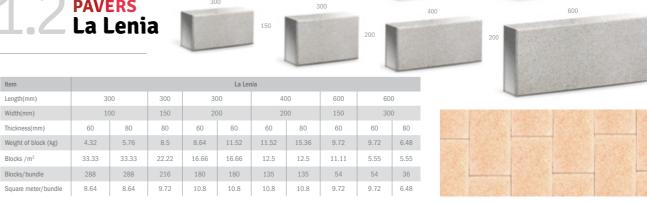

PAVERS Viva Classico®

















PAVERS Flair®










(Irregular Shapes)




Square meter/bundle

7.02



PAVERS Rusto®









1.6 PAVERS Antique®

Item	Antique			
Length(mm)	196/140/109	196/140/109		
Width(mm)	140	140		
Thickness(mm)	60	80		
Weight of block (kg)	3.9 / 2.8 / 2.2	5. 2 / 3.7 / 2.9		
Blocks /m²	51	51		
Blocks/bundle	378	378		
Square meter/bundle	7.4	7.4		










PAVERS Amwaj®

Item	Amwaj		
Sides (mm)	200/210/320		
Thickness(mm)	60	80	
Weight of block (kg)	8.3	10.3	
Blocks /m ²	18	18	
Blocks/bundle	144	144	
Square meter/bundle	8	8	






6 | page 7 | page

1.8 PAVERS Aura®


Item	Aura					
Length(mm)	280 / 22	15 / 150	280	150		
Width(mm)	225 / 14	0 / 140	225	140		
Thickness(mm)	60 80		60	80		
Weight of block (kg)	9/4.5/3	12/6/4	9	4		
Blocks /m ²	25.96	25.96	15.90	47.62		
Blocks/bundle	270	270	144	432		
Square meter/bundle	10.4	10.4	9.072	9.072		





1.9 PAVERS Venus®


Item	Venus
Length(mm)	250
Width(mm)	140
Thickness(mm)	60
Weight of block (kg)	2.8
Blocks /m²	51
Blocks/bundle	378
Square meter/bundle	7.41






1.10 PAVERS Ladana®

Item	Ladana
Length(mm)	240
Width(mm)	100/200
Thickness(mm)	60
Weight of block (kg)	6.8
Blocks /m ²	20.7
Blocks/bundle	135
Square meter/bundle	6.52








1.11 PAVERS Square®


Item	Square									
Length(mm)	8	80 100 150 200 300 400							400	
Width(mm)	8	30	1	.00	150	2	00	3	800	400
Thickness(mm)	60	80	60	80	80	60	80	60	80	60
Weight of block (kg)	0.9	1.2	1.4	1.9	23	5.5	7.4	12.8	17.2	23
Blocks /m²	156.25	156.25	100	100	44.44	25	25	11.11	11.11	6.25
Blocks/bundle	1260	1300	891	891	360	216	216	108	108	60
Square meter/bundle	8.07	8.33	8.91	8.91	8.1	10.8	10.8	9.72	9.72	9.6





1.12 PAVERS La Plaza®


Item	La Plaza		
Length(mm)	280		
Width(mm)	100/200		
Thickness(mm)	60 80		
Weight of block (kg)	7.2	9.06	
Blocks / m ²	21	21	
Blocks/bundle	126	126	
Square meter/bundle	6.003	6.003	



(Can be combined with Square Pavers 100 x 100 & 200 x 200)



1.13 PAVERS Octapave

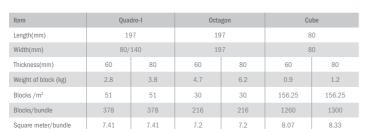







1.14 PAVERS Uni paver

Item	Unipaver					
Length(mm)		225				
Width(mm)	112.5					
Thickness(mm)	60	80	100			
Weight of block (kg)	3.57	4.72	6.00			
Blocks /m²	40	40	40			
Blocks/bundle	400	400	280			
Square meter/bundle	10.00	10.00	7.00			


Item	Unista	arter	
Length(mm)	315		
Width(mm)	22	5	
Thickness(mm)	60	80	
Weight of block (kg)	4.37	5.75	
Blocks /m ²	32	32	
Blocks/bundle	216	216	
Square meter/bundle	6.75	6.75	



1.15 PAVERS Behaton


Item	Behaton
Length(mm)	200
Width(mm)	165
Thickness(mm)	80
Weight of block (kg)	5.2
Blocks /m ²	35.7
Blocks/bundle	360
Square meter/bundle	10.08





1.16 PAVERS Honeycomb®

Item	Tri-Hex
Length(mm)	200
Side(mm)	60
Thickness(mm)	80
Weight of block (kg)	4.8
Blocks /m ²	39.375
Blocks/bundle	315
Square meter/bundle	8

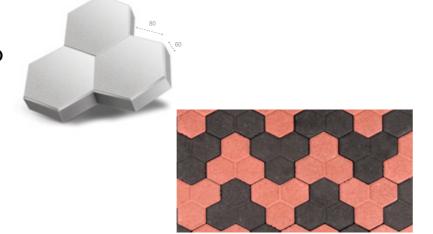

1.17 PAVERS Monaco

Item	Monaco Classic	Monaco New
Longer Side (mm)	160	200
Other Side (mm)	80	100
Thickness (mm)	80	80
Weight of block (kg)	4.7	7.5
Blocks /m ²	40.85	26
Blocks/bundle	297	207
Square meter/bundle	7.27	7.96




1.18 PAVERS Rectangular®


Item	R	ectangular	
Length(mm)		200	
Width(mm)		100	
Thickness(mm)	60	80	100
Weight of block (kg)	2.85	3.85	4.85
Blocks /m²	50	50	50
Blocks/bundle	486	486	384
Square meter/bundle	9.72	9.72	7.68


Item	Traingula	ar Starter
Length(mm)	1	40
Width(mm)	1	00
Thickness(mm)	60	80
Weight of block (kg)	2.7	3.7
Blocks /m²	52.5	52.5
Blocks/bundle	378	405
Square meter/bundle	7.2	7.74

BH Starter 268.4
268.4
192.9
60
3.6
50
432
8.64



1.19 PAVERS Grasscrete












Item	La Rambla
Length(mm)	600
Width(mm)	400
Thickness(mm)	60
Weight of block (kg)	34.7
Blocks / m ²	4.167
Square meter/bundle	9.6

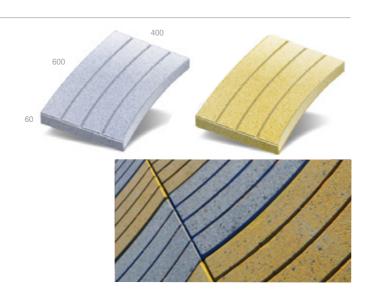

Colours

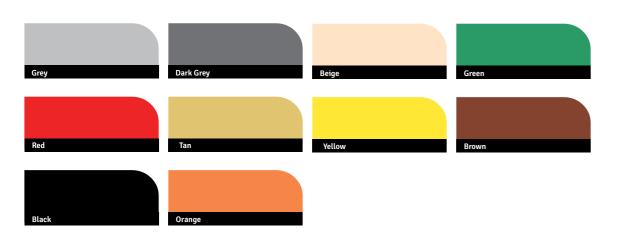

Finishes

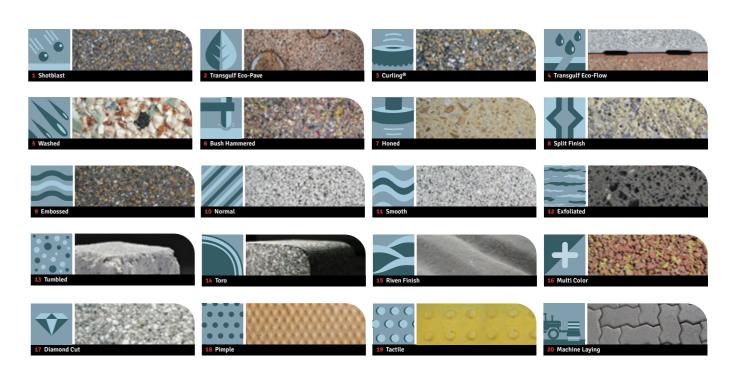

Textures



Important Information

HEALTH AND SAFETY

Care should be taken when handling and installing TRANSGULF CEMENT PRODUCTS. Units weighing 20kg or more should ideally be handled mechanically, or by two or more persons if the process of carrying is repetitive.

DELIVERY AND STORAGE

TRANSGULF CEMENT PRODUCTS are normally delivered to sites, properly packed on crane-offload road vehicles. Upon special request, packs can also be delivered shrink-wrapped and/or palletized to aid subsequent site movement activities. After delivery, the customer is solely responsible to ensure all packaging is carefully disposed off in accordance with the local environmental laws. Delivered products should be stacked at a planned location on the site to avoid the double handling. Bundles should be stacked onto a prepared, clean area to minimize soiling and damage. It is highly recommended that the products are kept at a distant location, away from passing vehicles and pedestrians.

EFFLORESCENCE

All concrete products may, in their early life, appear to lose some intensity of color and experience a white stain on the face of the product. This phenomenon is known as efflorescence, it is a temporary phenomenon and stains will generally clear within a period of time. This is not detrimental to the product performance

in any way and TRANSGULF CEMENT PRODUCTS cannot be held responsible for its occurrence.

COLOR VARIATION

Due to the phenomenon of different curing, slight color and shade variation do occur on individual colored concrete products. Site conditions, seasonal manufacture, or naturally occurring variations in the aggregates used, can also cause variations. This is generally considered to enhance the natural stone effect and the colors will invariably wither in time.

MAINTENANCE

It is recommended that the paving materials are cleaned 2-3 times in a year to maintain appearance. Products which are paved on driveway, particularly of light colors, require more maintenance as the tire mark and oil leakage can diminish the appearance. It is recommended to clean using normal water with a soft brush, high pressure jet pumps should not be used.

ORDERING

(To avoid shortage/wastage of material, please double check the order quantity as Transgulf cement products LLC will neither be responsible for extra material nor the duration to deliver the

shortage material). To avoid any confusion with respect to ordering, it is suggested that the paving tiles are ordered as a total batch and drawn out from several packs at the same time, to enhance any color variation. We recommend that colors are chosen from actual materials rather than color photographs herein.

WEATHERING

All concrete products will wither and change, especially after a period of time with exposition to natural elements.

SIZES

TRANSGULF's paving is manufactured to capture the authenticity of natural stone and as such, they do vary in thickness. All sizes are nominal and customers are advised to check with their supplier. Fissures can occur on larger individual pavers as a natural result of shrinkage. This does not alter the durability of the product.

LIABILITY

Liability in respect of any statements, conditions, warranties and representations made on behalf of the company, TRANSGULF CEMENT PRODUCTS LLC cannot accept liability for any loss,

damage or injuring sustained as a result of following it. We will not take any responsibility or liability if products are being used for purposes other than those for which they are intended for by the manufacturers. Due to our continuous evolution of product design and improvement, our range is subject to change without prior notice. Customers are advised to ensure that the stated information is up to date.

UNSATISFACTORY PRODUCT CONDITION

In case a product is delivered in an unsatisfactory condition, and other than any natural occurring one as described above, the defect would have to be informed about apparent prior to laying. It is at this point that the supplier should be notified of such a fault, and allowed time for the rejected product to be replaced. If the complaint is raised after laying the product, no responsibility will be accepted for any relaying or removing costs.

PRODUCT STANDARDS

ALL "TRANSGULF CEMENT PRODUCTS L.L.C" PRODUCTS ARE MANUFACTURED IN ACCORDANCE WITH INTERNATIONAL STANDARDS, WHERE APPLICABLE.







PRODUCTS

Dubai office:

Jebel Ali Ind. Area. P.O. Box 25595, Dubai, U.A.E Tel:+971 4 8801020. Fax:+971 4 8801021 Email:info@tgcp.ae. Web:www.tgcp.ae

Abu Dhabi office:

P.O. Box 131329, Abu Dhabi, U.A.E Tel:+971 2 6797959. Fax:+971 2 6797960 Email:info@tgcp.ae. Web:www.tgcp.ae