



NATIONAL[®]
PAINTS



NATIONAL SYNPLAST

A Specifically Designed Textured Coating



Description:

National Synplast is a specially designed environmentally friendly textured coating based on Acrylic Copolymer Emulsion.

The presence of quartz aggregate provides reinforcement and gives a durable tough coating, which provides good resistance in humid as well as hot climatic conditions. It also contains antifungal and antibacterial additives.

Recommended Use:

National Synplast is effectively recommended for use on cementitious and wooden surfaces and acts as an excellent protective and decorative coating.

Recommended Dry Film:

1500 microns per coat (Approximately).

Thinning:

National Synplast is supplied in a ready to use form. If thinning is required a small quantity of water can be added.

Theoretical Spreading Rate:

0.5-0.7 m² per litre depending on the surface and film thickness.

Surface Preparation:

Make sure that the surface on which **National Synplast** is applied is sound and free from dust, oil and grease.

- Apply one coat of **National Acrylic Primer (W.B.)**.
- As top coat apply one coat of **National Synplast**.

Application Method:

Apply **National Synplast** using trowel or spray and make the round grooves design by using slight pressure and rotating the trowel on the wet paint parallel to the surface.

Drying Time:

- Dry to recoat : 24 hours
- Touch Dry : 3-4 hours
- Full Drying : 24 hours

الوصف:

ناشونال سينبلاست هو صبغ زخرفي (تكتسثر) صمم خصيصاً ليكون صديق للبيئة، مصنوع من مادة أكريليك كوبوليمر إملشن.

ولإعطائه طبقة نهائية قوية وشديدة التحمل تمت إضافة حبيبات الكوارتز، حيث تمنحه القدرة على مقاومة جيدة لعوامل الطقس خاصة الرطوبة والطقس الحار. كما يحتوي على مواد تمنع تكوّن الفطريات والبكتيريا.

الاستعمالات:

ناشونال سينبلاست منتج فعال ويوصى باستعماله لحماية الأسطح الاسمنتية والخشبية كما يضيف لمسة جمالية للأسطح.

سماعة الطبقة الجافة:

١٥٠٠ ميكرون لكل طبقة (تقريباً).

التخفيف:

ناشونال سينبلاست جاهز للاستعمال، يمكن تخفيفه عند الحاجة بإضافة كمية قليلة من الماء.

معدل التغطية النظري:

٠,٥ - ٠,٧ م^٢ / لتر اعتماداً على طبيعة السطح وسماعة الطبقة المراد صبغها.

الإجراءات التحضيرية للاستعمال:

يجب التأكد من سلامة السطح المراد صبغه بناشونال سينبلاست وخلوه من الغبار، الزيوت والشحوم. لوضع طبقة الأساس:

- يطلى السطح بطبقة واحدة من ناشونال أكريليك برايمر ماني.
- لوضع الطبقة النهائية:
- يطلى السطح بطبقة واحدة من ناشونال سينبلاست.


طريقة الاستعمال:

يطلى السطح بناشونال سينبلاست باستخدام طريقتين: الرش أو باستخدام المسطرين. يمكن الحصول على نقشات دائرية الشكل وذلك بالضغط الخفيف على الصبغ بواسطة المسطرين والتحريك بشكل دائري وموازي للسطح قبل أن يجف.

الجفاف:

- الجفاف لإعادة وضع الطبقة التالية : ٢٤ ساعة
- الجفاف عند اللمس : ٣-٤ ساعات
- الجفاف التام : ٢٤ ساعة

Actual Samples

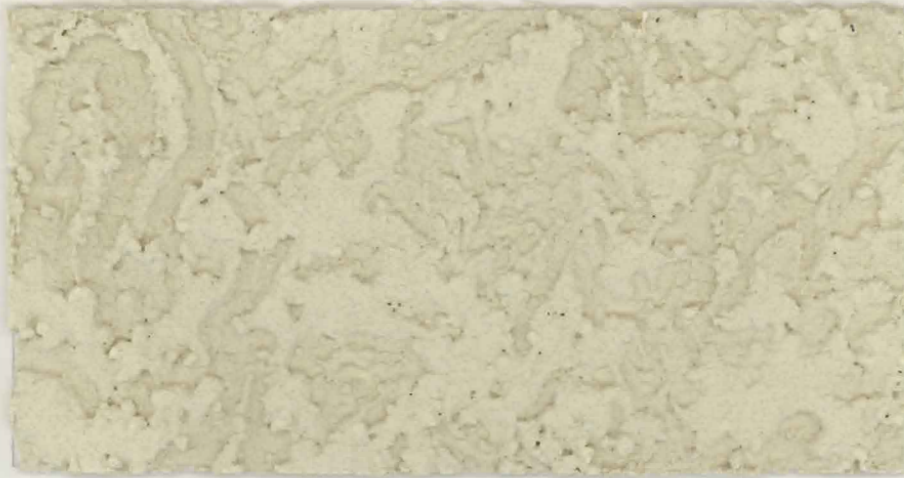

803 MAGNOLIA



806 CREAM



807 DEEP CREAM

SHADES AVAILABLE FROM EMULSION SHADE CARD:

801 OFF WHITE
802 BROKEN WHITE
803 MAGNOLIA

804 CANDYFLOSS
805 MUSHROOM
806 CREAM

807 DEEP CREAM
808 PEANUT BUTTER
833 LIGHT YELLOW

834 PALE CREAM
840 TEXAS CREAM
200 DYRO GREY

الالوان المتوفرة من بطاقة ألوان الإملشن:

Range of Products

*Decorative Paints
Texture Finishes
Industrial Paints
Protective Coatings
Automotive Paints
Tennis Court Paints
Swimming Pool Coating
Multi-Color Paints
Anti-Corrosive Coatings*

*Powder coating
Water Proofing
Marine & Yacht Coatings
Epoxy Flooring
Road Marking
Fluorescent Paint
Wood Finishes
Thinners
Polyurethane*

شركة مصانع الأصباغ الوطنية المحدودة
NATIONAL PAINTS FACTORIES CO. LTD.



Sharjah - U.A.E.
Tel.: +971 6 5340111
Fax: +971 6 5340222
P.O.Box 5822
npfcl@national-paints.com

Abu Dhabi - U.A.E.
Tel.: +971 2 6340400
Fax: +971 2 6340411
P.O.Box 27455



Abu Alanda - Jordan
Tel.: +962 6 4162481
Fax: +962 6 4162483
P.O.Box 533 Abu Alanda 11592
npfc@nets.com.jo



Doha - Qatar
Tel.: +974 4601603
Fax: +974 4602721
P.O. Box 40544
npf@qatar.net.qa



Al Khartoum - Sudan
Tel.: +249 13 310490/1
Fax: +249 13 310288
P.O. Box 10885
npaint@sudanmail.net



Cairo - Egypt
Tel.: +202 6982599
Fax: +202 6972509



Bishkek - Kyrgyzstan
Tel.: +99 6312 512540
Fax: +99 6312 512543
npaints@infotel.kg



Tashkent - Uzbekistan
Tel.: +998712 450254
Fax: +998712 456850



Almaty - Kazakhstan
Tel.: +7 3272 573850
Fax: +7 3272 573851
national@paints.kz



Moscow - Russia
Tel.: +7 095 4653196
Fax: +7 095 9650510
npaints@rol.ru



Iasi - Romania
Tel.: +40 232 236 920/236 921
Fax: +40 232 295 514/219 249
P.O. Box 700012
office@companiaconex.ro



www.national-paints.com

