




THERMATEX Alpha

THERMATEX Alpha is a mineral ceiling tile providing high sound absorption. The light weight and perforations of the core board create Class A sound absorber. With a strong white surface the appearance of THERMATEX Alpha is smooth and elegant. New generation bio-soluble mineral wool, clay and starch, contribute to the excellent acoustic performance.




SYSTEM	■ Exposed Grid System, demountable ceiling
Dimensions	■ 600 x 600 mm, 625 x 625 mm, further sizes available on request
Thickness / Weight	■ 19 mm (c. 3.0 kg/m ²)
Colour	■ White similar to RAL 9010
Edge details	■ SK, VT-S 15/24, VT-S 15F, VT 15/24 (on request)

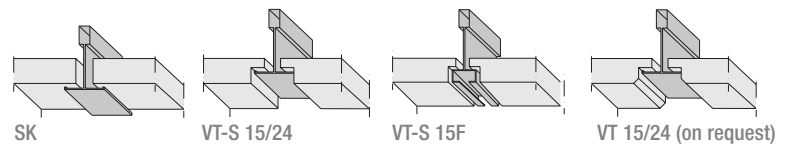

TECHNICAL PERFORMANCE

Building material class	■ A2-s1, d0 as per EN 13501-1 Class A as per ASTM E1264 (tested according to ASTM E84)
Fire protection	■ REI 30 - REI 90 as per EN 13501-2 (according to test certificate)
Sound absorption	■ EN ISO 354 $\alpha_W = 0.95$ as per EN ISO 11654 $NRC = 0.90$ as per ASTM C 423
Sound attenuation	■ $D_{n,f,w} = 28$ dB as per EN 10848 (19 mm thickness, according to test certificate)
Light reflectance	■ up to 88%
Thermal conductivity	■ $\lambda = 0.040$ W/mK as per EN 12667
Humidity	■ Up to 95% RH
Clean room classification	■ ISO-class 4 as per ISO 14644-1

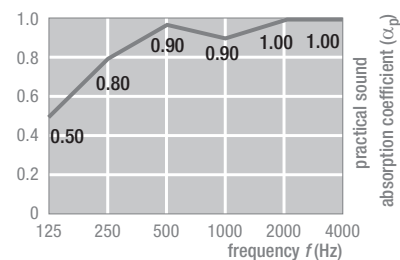

Knauf AMF GmbH & Co. KG
 Elsenthal 15
 D-94481 Grafenau, Germany
 Phone +49 (0) 8552 / 422-0 - Fax +49 (0) 8552 / 422-32
 info@knaufamf.de - www.amfceilings.com

Due to reproduction processes colours shown in this catalogue may differ from the actual product colour. Product selection should always be made from AMF samples. All details and technical information stated in this brochure or other publicity material referring to AMF ceiling systems are based on test reports obtained under laboratory conditions. It is the responsibility of the customer to ensure that this data is suitable for the proposed application.

All information provided is based on current technical data. Further relevant test reports, assessments and installation guidelines are available. All system details conform with current standards and are based on the use of AMF products and system components. AMF accepts no liability or responsibility for use of third party components, or for any variations to conditions stipulated in test data. Mixing of production batches is not recommended.

All technical data is subject to change without prior notice and is governed by AMF Terms and Conditions of Sales. This catalogue supersedes all previous editions. Errors and omissions excepted. Printing errors excepted.